

201-100-SLD

Single-Channel Seal-Leak Detector



UL listed when used in combination with OT08PC socket only.



Description

The model 201-100-SLD is an 8-pin plug-in style seal-leak detector to sense seal failures on submersible pumps. A microcontroller-based relay that monitors the shaft seal of a submersible pump motor. A resistive probe is installed in the seal cavity. If water leaks into the pump, the resistance measured by the probe decreases. When the resistance drops below the sensitivity setpoint, the unit will trip and the relay contacts will change state. The unit will automatically reset when a fault is cleared.

Features & Benefits

- LED status indicator
- Compact plug-in design
- DIN rail or surface mountable via octal base

Accessories




OT08PC 8-pin Octal Socket

Octal Socket for plug-in units. 8-pin surface & DIN rail mountable. Rated for 10A @ 600VAC.

8

Wiring Diagram

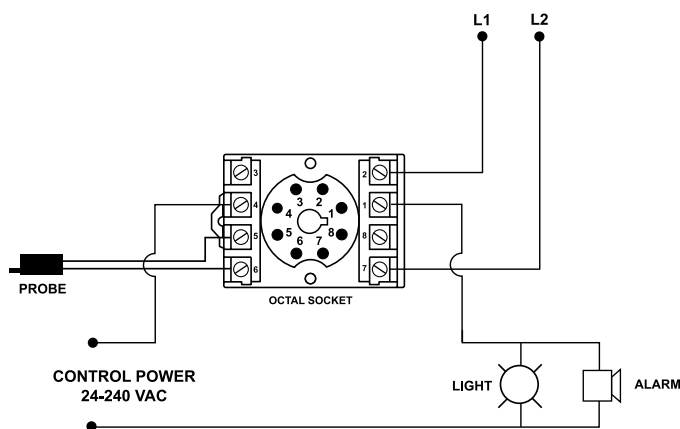







For dimensional drawing see: Appendix, page 509, Figure 8.

Specifications

Control Voltage	110/120VAC nominal
Frequency	50/60Hz
Sensitivity	4.7k-100kΩ
Probe Sense Voltage	5vdc pulsed
Output contact Rating	SPDT
Pilot Duty	480VA @ 240VAC
General Purpose	10A @ 240VAC
Operating Temperature	-40° to 70°C (-40° to 158°F)
Storage	-40° to 80°C (-40° to 176°F)
Maximum Input Power	5 W
Relative Humidity	10-95%, non-condensing per IEC 68-2-3
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3, 6kV contact, 8kV air
Radio Frequency Immunity, Radiated	150MHz, 10V/m
Fast Transient Burst	IEC 61000-4-4, Level 3, 3.5kV input power and controls
IEC	IEC 61000-4-5, Level 3, 4kV line-to-line; level 4, 4kV line-to-ground
ANSI/IEEE	C62.41 Surge and Ring Wave Compliance to a level of 6kV line-to-line
Hi-Potential Test	Meets UL508 (2 x rated V + 1000V for 1 min.)
UL*	UL508 (File #E68520)
CE	IEC 60947-6-2
Enclosure	Polycarbonate
Dimensions	H 44.45 mm (1.75"); W 60.325 mm (2.375"); D (with socket) 104.78 mm (4.125")
Weight	0.7 lb. (11.2 oz., 317.51 g)
Mounting Method	DIN rail or surface mount (plug into OT08PC socket)
Socket Available	Model OT08PC (UL Rating 600V)
Approvals	UL, CE

*Must use Model OT08PC socket for UL Rating!
The 600V socket can be surface mounted or installed on DIN Rail.

SOCKETS

SOCKETS																											
Product		Features	Accessory For																								
OT08PC Octal Socket 8-Pin		8-pin 35mm DIN rail or surface mount octal socket. Rated at 10A @ 600VAC and has pressure clamp terminals.	AWG 12 to 22 (3.2 to 0.33 mm²) wire sizes. Consult individual datasheet for compatibility																								
NDS-8 Octal Socket 8-Pin Screw terminals with captive wire clamps		8-pin 35mm DIN rail or surface mount octal socket. Rated at 10A @ 300VAC. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. A spring mechanism allows easy removal. Uses PSC8 hold-down clips.	Up to two #14 AWG (2.45 mm²) wire size Series: <table> <tr> <td>ARP</td><td>FS500</td><td>LLC4</td><td>LLC5</td></tr> <tr> <td>PRLM</td><td>TDB</td><td>TDBH</td><td>TDBL</td></tr> <tr> <td>TDI</td><td>TDIH</td><td>TDIL</td><td>TDM</td></tr> <tr> <td>TDMB</td><td>TDMH</td><td>TDSL</td><td>TDR</td></tr> <tr> <td>TDS</td><td>TDSH</td><td>TRDU</td><td>TRM</td></tr> <tr> <td>TRM</td><td>TRS</td><td>TRU</td><td></td></tr> </table>	ARP	FS500	LLC4	LLC5	PRLM	TDB	TDBH	TDBL	TDI	TDIH	TDIL	TDM	TDMB	TDMH	TDSL	TDR	TDS	TDSH	TRDU	TRM	TRM	TRS	TRU	
ARP	FS500	LLC4	LLC5																								
PRLM	TDB	TDBH	TDBL																								
TDI	TDIH	TDIL	TDM																								
TDMB	TDMH	TDSL	TDR																								
TDS	TDSH	TRDU	TRM																								
TRM	TRS	TRU																									
P1011-6 Octal Socket 8-Pin		8-pin surface mount socket with binder head screw terminals. Rated at 10A @ 600VAC. UL Listed combination when used with TDM, TDB, TDS Series timers. Uses PSCRB8 hold-down brackets.	Series: <table> <tr> <td>ARP</td><td>FS500</td><td>LLC4</td><td>LLC5</td></tr> <tr> <td>PRLM</td><td>TDB</td><td>TDM</td><td>TDMB</td></tr> <tr> <td>TDR</td><td>TDS</td><td>TRB</td><td>TRDU</td></tr> <tr> <td>TRM</td><td>TRS</td><td>TRU</td><td></td></tr> </table>	ARP	FS500	LLC4	LLC5	PRLM	TDB	TDM	TDMB	TDR	TDS	TRB	TRDU	TRM	TRS	TRU									
ARP	FS500	LLC4	LLC5																								
PRLM	TDB	TDM	TDMB																								
TDR	TDS	TRB	TRDU																								
TRM	TRS	TRU																									
OT11PC Magna Socket 11-Pin		Magna Sockets are for plug-in units	11-pin Plug-in units Series: <table> <tr> <td>ARP</td><td>LLC6</td><td>TDB</td><td>TDBH</td></tr> <tr> <td>TDBL</td><td>TDMB</td><td>TDS</td><td>TDSH</td></tr> <tr> <td>TDSL</td><td>TRB</td><td>TRDU</td><td>TRM</td></tr> <tr> <td>TRS</td><td>TRU</td><td></td><td></td></tr> </table>	ARP	LLC6	TDB	TDBH	TDBL	TDMB	TDS	TDSH	TDSL	TRB	TRDU	TRM	TRS	TRU										
ARP	LLC6	TDB	TDBH																								
TDBL	TDMB	TDS	TDSH																								
TDSL	TRB	TRDU	TRM																								
TRS	TRU																										
SD12-PC Rectangle Socket 12-pin		12-pin surface Rectangle Socket.	ACBC-120																								
NDS-11 11-pin Magna Socket Screw terminals with captive wire clamps		11 pin 35 mm DIN rail or surface mount socket. Rated at 10A @ 300VAC. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. A spring mechanism allows easy removal. Uses PSC11 hold-down clips.	AWG 12 to 22 (3.2 to 0.33 mm²) wire sizes Series: <table> <tr> <td>ARP</td><td>LLC6</td><td>TDB</td><td>TDBH</td></tr> <tr> <td>TDBL</td><td>TDMB</td><td>TDS</td><td>TDSH</td></tr> <tr> <td>TDSL</td><td>TRB</td><td>TRDU</td><td>TRM</td></tr> <tr> <td>TRS</td><td>TRU</td><td></td><td></td></tr> </table>	ARP	LLC6	TDB	TDBH	TDBL	TDMB	TDS	TDSH	TDSL	TRB	TRDU	TRM	TRS	TRU										
ARP	LLC6	TDB	TDBH																								
TDBL	TDMB	TDS	TDSH																								
TDSL	TRB	TRDU	TRM																								
TRS	TRU																										

201-100-SLD

Single-Channel Seal-Leak Detector



UL listed when used in combination with OT08PC socket only.



Description

The model 201-100-SLD is an 8-pin plug-in style seal-leak detector to sense seal failures on submersible pumps. A microcontroller-based relay that monitors the shaft seal of a submersible pump motor. A resistive probe is installed in the seal cavity. If water leaks into the pump, the resistance measured by the probe decreases. When the resistance drops below the sensitivity setpoint, the unit will trip and the relay contacts will change state. The unit will automatically reset when a fault is cleared.

Features & Benefits

- LED status indicator
- Compact plug-in design
- DIN rail or surface mountable via octal base

Accessories




OT08PC 8-pin Octal Socket

Octal Socket for plug-in units. 8-pin surface & DIN rail mountable. Rated for 10A @ 600VAC.

8

Wiring Diagram

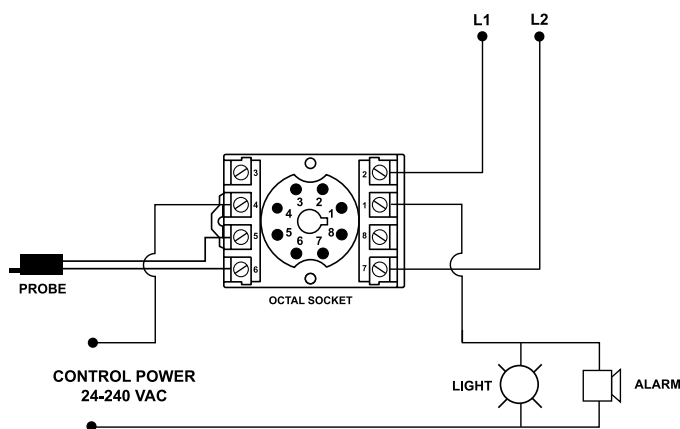







For dimensional drawing see: Appendix, page 509, Figure 8.

Specifications

Control Voltage	110/120VAC nominal
Frequency	50/60Hz
Sensitivity	4.7k-100kΩ
Probe Sense Voltage	5vdc pulsed
Output contact Rating	SPDT
Pilot Duty	480VA @ 240VAC
General Purpose	10A @ 240VAC
Operating Temperature	-40° to 70°C (-40° to 158°F)
Storage	-40° to 80°C (-40° to 176°F)
Maximum Input Power	5 W
Relative Humidity	10-95%, non-condensing per IEC 68-2-3
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3, 6kV contact, 8kV air
Radio Frequency Immunity, Radiated	150MHz, 10V/m
Fast Transient Burst	IEC 61000-4-4, Level 3, 3.5kV input power and controls
IEC	IEC 61000-4-5, Level 3, 4kV line-to-line; level 4, 4kV line-to-ground
ANSI/IEEE	C62.41 Surge and Ring Wave Compliance to a level of 6kV line-to-line
Hi-Potential Test	Meets UL508 (2 x rated V + 1000V for 1 min.)
UL*	UL508 (File #E68520)
CE	IEC 60947-6-2
Enclosure	Polycarbonate
Dimensions	H 44.45 mm (1.75"); W 60.325 mm (2.375"); D (with socket) 104.78 mm (4.125")
Weight	0.7 lb. (11.2 oz., 317.51 g)
Mounting Method	DIN rail or surface mount (plug into OT08PC socket)
Socket Available	Model OT08PC (UL Rating 600V)
Approvals	UL, CE

*Must use Model OT08PC socket for UL Rating!
The 600V socket can be surface mounted or installed on DIN Rail.

SOCKETS

SOCKETS																											
Product		Features	Accessory For																								
OT08PC Octal Socket 8-Pin		8-pin 35mm DIN rail or surface mount octal socket. Rated at 10A @ 600VAC and has pressure clamp terminals.	AWG 12 to 22 (3.2 to 0.33 mm²) wire sizes. Consult individual datasheet for compatibility																								
NDS-8 Octal Socket 8-Pin Screw terminals with captive wire clamps		8-pin 35mm DIN rail or surface mount octal socket. Rated at 10A @ 300VAC. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. A spring mechanism allows easy removal. Uses PSC8 hold-down clips.	Up to two #14 AWG (2.45 mm²) wire size Series: <table> <tr> <td>ARP</td><td>FS500</td><td>LLC4</td><td>LLC5</td></tr> <tr> <td>PRLM</td><td>TDB</td><td>TDBH</td><td>TDBL</td></tr> <tr> <td>TDI</td><td>TDIH</td><td>TDIL</td><td>TDM</td></tr> <tr> <td>TDMB</td><td>TDMH</td><td>TDSL</td><td>TDR</td></tr> <tr> <td>TDS</td><td>TDSH</td><td>TRDU</td><td>TRM</td></tr> <tr> <td>TRM</td><td>TRS</td><td>TRU</td><td></td></tr> </table>	ARP	FS500	LLC4	LLC5	PRLM	TDB	TDBH	TDBL	TDI	TDIH	TDIL	TDM	TDMB	TDMH	TDSL	TDR	TDS	TDSH	TRDU	TRM	TRM	TRS	TRU	
ARP	FS500	LLC4	LLC5																								
PRLM	TDB	TDBH	TDBL																								
TDI	TDIH	TDIL	TDM																								
TDMB	TDMH	TDSL	TDR																								
TDS	TDSH	TRDU	TRM																								
TRM	TRS	TRU																									
P1011-6 Octal Socket 8-Pin		8-pin surface mount socket with binder head screw terminals. Rated at 10A @ 600VAC. UL Listed combination when used with TDM, TDB, TDS Series timers. Uses PSCRB8 hold-down brackets.	Series: <table> <tr> <td>ARP</td><td>FS500</td><td>LLC4</td><td>LLC5</td></tr> <tr> <td>PRLM</td><td>TDB</td><td>TDM</td><td>TDMB</td></tr> <tr> <td>TDR</td><td>TDS</td><td>TRB</td><td>TRDU</td></tr> <tr> <td>TRM</td><td>TRS</td><td>TRU</td><td></td></tr> </table>	ARP	FS500	LLC4	LLC5	PRLM	TDB	TDM	TDMB	TDR	TDS	TRB	TRDU	TRM	TRS	TRU									
ARP	FS500	LLC4	LLC5																								
PRLM	TDB	TDM	TDMB																								
TDR	TDS	TRB	TRDU																								
TRM	TRS	TRU																									
OT11PC Magna Socket 11-Pin		Magna Sockets are for plug-in units	11-pin Plug-in units Series: <table> <tr> <td>ARP</td><td>LLC6</td><td>TDB</td><td>TDBH</td></tr> <tr> <td>TDBL</td><td>TDMB</td><td>TDS</td><td>TDSH</td></tr> <tr> <td>TDSL</td><td>TRB</td><td>TRDU</td><td>TRM</td></tr> <tr> <td>TRS</td><td>TRU</td><td></td><td></td></tr> </table>	ARP	LLC6	TDB	TDBH	TDBL	TDMB	TDS	TDSH	TDSL	TRB	TRDU	TRM	TRS	TRU										
ARP	LLC6	TDB	TDBH																								
TDBL	TDMB	TDS	TDSH																								
TDSL	TRB	TRDU	TRM																								
TRS	TRU																										
SD12-PC Rectangle Socket 12-pin		12-pin surface Rectangle Socket.	ACBC-120																								
NDS-11 11-pin Magna Socket Screw terminals with captive wire clamps		11 pin 35 mm DIN rail or surface mount socket. Rated at 10A @ 300VAC. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. A spring mechanism allows easy removal. Uses PSC11 hold-down clips.	AWG 12 to 22 (3.2 to 0.33 mm²) wire sizes Series: <table> <tr> <td>ARP</td><td>LLC6</td><td>TDB</td><td>TDBH</td></tr> <tr> <td>TDBL</td><td>TDMB</td><td>TDS</td><td>TDSH</td></tr> <tr> <td>TDSL</td><td>TRB</td><td>TRDU</td><td>TRM</td></tr> <tr> <td>TRS</td><td>TRU</td><td></td><td></td></tr> </table>	ARP	LLC6	TDB	TDBH	TDBL	TDMB	TDS	TDSH	TDSL	TRB	TRDU	TRM	TRS	TRU										
ARP	LLC6	TDB	TDBH																								
TDBL	TDMB	TDS	TDSH																								
TDSL	TRB	TRDU	TRM																								
TRS	TRU																										