











### Accessories

#### FAZ-NA UL 489 Breakers

	Description	Catalog Number
<b>Contact</b> 	Two-pole contact or auxiliary contact/trip indicating contact	<b>Z-NHK</b> <sup>①</sup>
<b>Auxiliary Contact</b> 	Auxiliary contact	<b>Z-IHK-NA</b>
<b>Shunt Trip</b>  	Shunt trip 110–415 Vac Shunt trip 12–110 Vac	<b>FAZ-XAA-NA110-415VAC</b> <b>FAZ-XAA-NA12-110VAC</b>
<b>Padlock Hasp</b> 	Padlock hasp	<b>Z-IS/SPE-1TE</b>
<b>Lockoff Device</b> 	UL lockoff device	<b>FAZPLOFF</b>

#### FAZ-NA UL 489 Breakers, continued

	Description	Catalog Number
<b>Busbar</b> 	Busbar—single-pole, 6 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/1P-1TE/6</b>
	Busbar—single-pole, 12 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/1P-1TE/12</b>
	Busbar—single-pole, 18 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/1P-1TE/18</b>
	Busbar—two-pole, 6 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/2P-2TE/6</b>
	Busbar—two-pole, 12 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/2P-2TE/12</b>
	Busbar—two-pole, 18 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/2P-2TE/18</b>
	Busbar—three-pole, 6 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/3P-3TE/6</b>
	Busbar—three-pole, 12 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/3P-3TE/12</b>
	Busbar—three-pole, 18 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/3P-3TE/18</b>
<b>Busbar Shroud</b> 	Three-pole busbar shroud	<b>ZV-BS-UL</b>
<b>Extension Terminal</b> 	Extension terminal—35 mm <sup>2</sup> (10–1/0 AWG)	<b>Z-EK/35/UL</b>
<b>Bus Connector</b> 	Bus connector—conductors up to 50 mm <sup>2</sup> (–1/0 AWG)	<b>Z-EB/50/UL</b>

#### Notes

- ① Voltage of FAZ-NA circuit breaker is limited to 300V with this auxiliary contact installed.
- ② Do not cut commoning link.
- ③ A maximum of three commoning links may be used in conjunction. Each breaker connected to the commoning link must have the same number of poles for proper use.
- ④ Not for use with ring-tongue circuit breakers.
- ⑤ Bus may be center fed for high current capacity.

# 1.2

## Miniature Circuit Breakers and Supplementary Protectors

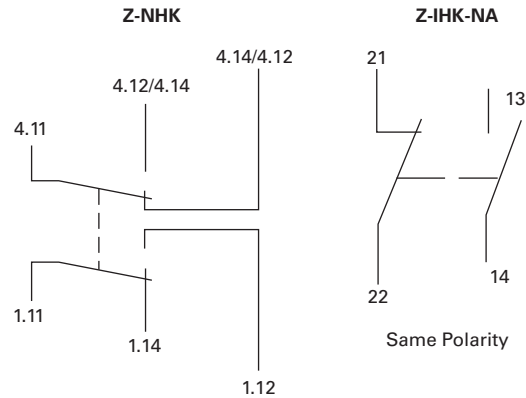
### UL 489 DIN Rail Miniature Circuit Breakers

1

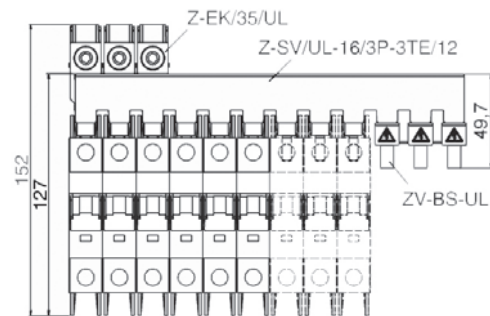
#### Tripping Signal Switch Z-NHK, Z-IHK-NA

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Field installable
- The specified minimum voltages are per contact—take into account particularly in case of series connection
- Self-cleaning contacts
- Contact material and design particularly suitable for extra low voltage
- Z-NHK: the function of one of the two change-over contacts can be switched from “auxiliary switch” to “tripping signal switch”
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function “electrical tripping”
- Z-IHK-NA: will allow for > 480Y/277 Vac rating

#### Connection Diagram



#### Busbar Connection Example



### Z-NHK

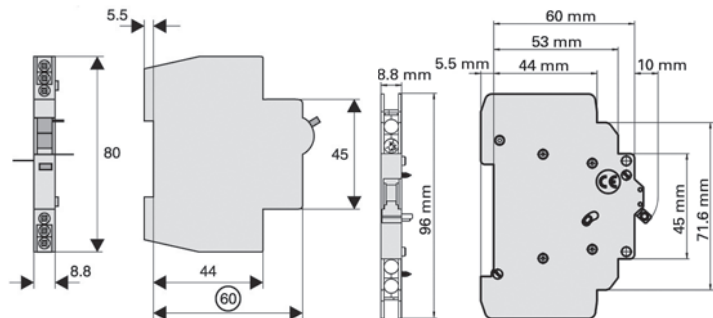


### Z-IHK-NA









### Contact and Auxiliary Contact

Description	Z-NHK	Z-IHK-NA
<b>Electrical</b>		
Contact function	2C0	1N0 + 1NC
Rated voltage	230V	250V
Frequency	50/60 Hz	50/60 Hz
Rated current	2A	6A
Rated thermal current $I_{th}$	2A	6A
Utilization category AC13 Rated operational current $I_e$	3A/250 Vac	3A/250 Vac
Utilization category AC15 Rated operational current $I_e$	2A/250 Vac	2A/250 Vac
Utilization category DC12 Rated operational current $I_e$	0.5A/110 Vdc	0.5A/110 Vdc 0.25A/220 Vdc
Rated insulation voltage $U_i$	250 Vac	250 Vac
Minimum operational voltage per contact $U_{min}$	5 Vdc	5 Vdc
Minimum operational current $I_{min}$	10 mA DC	10 mA AC/DC
Rated peak withstand voltage $U_{imp}$ (1.2/50 $\mu$ )	2.5 kV	4 kV
Conditional short-circuit current $I_k$ with backup fuse 6A	1 kA	1 kA
Max. backup fuse, overload and short circuit	6A gL	—
<b>Mechanical</b>		
Tripping indicator "electrical tripping"	Blue/white	—
Frame size	45 mm	45 mm
Device height	80 mm	80 mm
Device width	8.8 mm (0.5MU)	8.8 mm (0.5MU)
Mounting	Onto switching device	—
Degree of protection, built-in	IP40	IP40
Terminal protection	Finger and hand touch safe According to BGV A3, ÖVE-EN 6	Finger and hand touch safe According to BGV A3, ÖVE-EN 6
Terminals	Lift terminals	Lift terminals
Terminal capacity	20–14 AWG	0.5–2.5 mm <sup>2</sup>
Terminal screws	M3 (Posidrive Z0)	M3 (Posidrive Z0)
Fastening torque of terminal screws	7 lb-in	Max. 1.2 Nm







### Accessories

#### FAZ-NA UL 489 Breakers

	Description	Catalog Number
<b>Contact</b> 	Two-pole contact or auxiliary contact/trip indicating contact	<b>Z-NHK</b> <sup>①</sup>
<b>Auxiliary Contact</b> 	Auxiliary contact	<b>Z-IHK-NA</b>
<b>Shunt Trip</b>  	Shunt trip 110–415 Vac Shunt trip 12–110 Vac	<b>FAZ-XAA-NA110-415VAC</b> <b>FAZ-XAA-NA12-110VAC</b>
<b>Padlock Hasp</b> 	Padlock hasp	<b>Z-IS/SPE-1TE</b>
<b>Lockoff Device</b> 	UL lockoff device	<b>FAZPLOFF</b>

#### FAZ-NA UL 489 Breakers, continued

	Description	Catalog Number
<b>Busbar</b> 	Busbar—single-pole, 6 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/1P-1TE/6</b>
	Busbar—single-pole, 12 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/1P-1TE/12</b>
	Busbar—single-pole, 18 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/1P-1TE/18</b>
	Busbar—two-pole, 6 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/2P-2TE/6</b>
	Busbar—two-pole, 12 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/2P-2TE/12</b>
	Busbar—two-pole, 18 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/2P-2TE/18</b>
	Busbar—three-pole, 6 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/3P-3TE/6</b>
	Busbar—three-pole, 12 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/3P-3TE/12</b>
	Busbar—three-pole, 18 terminals <sup>②③④⑤</sup>	<b>Z-SV/UL-16/3P-3TE/18</b>
<b>Busbar Shroud</b> 	Three-pole busbar shroud	<b>ZV-BS-UL</b>
<b>Extension Terminal</b> 	Extension terminal—35 mm <sup>2</sup> (10–1/0 AWG)	<b>Z-EK/35/UL</b>
<b>Bus Connector</b> 	Bus connector—conductors up to 50 mm <sup>2</sup> (–1/0 AWG)	<b>Z-EB/50/UL</b>

#### Notes

- ① Voltage of FAZ-NA circuit breaker is limited to 300V with this auxiliary contact installed.
- ② Do not cut commoning link.
- ③ A maximum of three commoning links may be used in conjunction. Each breaker connected to the commoning link must have the same number of poles for proper use.
- ④ Not for use with ring-tongue circuit breakers.
- ⑤ Bus may be center fed for high current capacity.

# 1.2

## Miniature Circuit Breakers and Supplementary Protectors

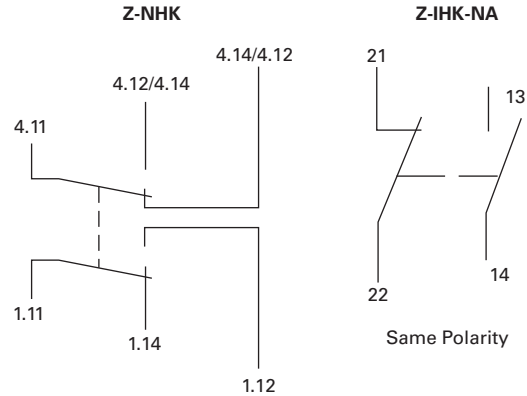
### UL 489 DIN Rail Miniature Circuit Breakers

1

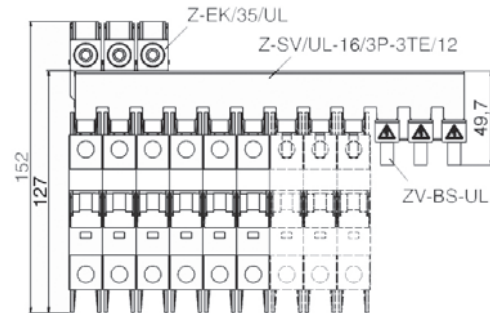
#### Tripping Signal Switch Z-NHK, Z-IHK-NA

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Field installable
- The specified minimum voltages are per contact—take into account particularly in case of series connection
- Self-cleaning contacts
- Contact material and design particularly suitable for extra low voltage
- Z-NHK: the function of one of the two change-over contacts can be switched from “auxiliary switch” to “tripping signal switch”
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function “electrical tripping”
- Z-IHK-NA: will allow for > 480Y/277 Vac rating

#### Connection Diagram



#### Busbar Connection Example



### Z-NHK



### Z-IHK-NA



### Contact and Auxiliary Contact

Description	Z-NHK	Z-IHK-NA
<b>Electrical</b>		
Contact function	2C0	1N0 + 1NC
Rated voltage	230V	250V
Frequency	50/60 Hz	50/60 Hz
Rated current	2A	6A
Rated thermal current $I_{th}$	2A	6A
Utilization category AC13 Rated operational current $I_b$	3A/250 Vac	3A/250 Vac
Utilization category AC15 Rated operational current $I_b$	2A/250 Vac	2A/250 Vac
Utilization category DC12 Rated operational current $I_b$	0.5A/110 Vdc	0.5A/110 Vdc 0.25A/220 Vdc
Rated insulation voltage $U_i$	250 Vac	250 Vac
Minimum operational voltage per contact $U_{min}$	5 Vdc	5 Vdc
Minimum operational current $I_{min}$	10 mA DC	10 mA AC/DC
Rated peak withstand voltage $U_{imp}$ (1.2/50 $\mu$ )	2.5 kV	4 kV
Conditional short-circuit current $I_k$ with backup fuse 6A	1 kA	1 kA
Max. backup fuse, overload and short circuit	6A gL	—
<b>Mechanical</b>		
Tripping indicator "electrical tripping"	Blue/white	—
Frame size	45 mm	45 mm
Device height	80 mm	80 mm
Device width	8.8 mm (0.5MU)	8.8 mm (0.5MU)
Mounting	Onto switching device	—
Degree of protection, built-in	IP40	IP40
Terminal protection	Finger and hand touch safe According to BGV A3, ÖVE-EN 6	Finger and hand touch safe According to BGV A3, ÖVE-EN 6
Terminals	Lift terminals	Lift terminals
Terminal capacity	20–14 AWG	0.5–2.5 mm <sup>2</sup>
Terminal screws	M3 (Posidrive Z0)	M3 (Posidrive Z0)
Fastening torque of terminal screws	7 lb-in	Max. 1.2 Nm

