



KT-LED12HID-E26-850-D

HID REPLACEMENT LED LAMP

DESCRIPTION

12W HID Replacement LED Lamp | 5000K | >80 CRI | IP64 Rated



| |
|---|
| LAMP TYPE: HID Replacement LED |
| BASE TYPE: E26 (Medium) |
| WATTAGE: 12W |
| COLOR TEMPERATURE: 5000K |
| METAL HALIDE EQUIVALENT: 50W |
| COLOR RENDERING INDEX (CRI): >80 |
| WARRANTY: 5 Years |



PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed
- Operating Temperature: -40°C/-40°F to 60°C/140°F
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 4kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Suitable for Use in Fully Enclosed Fixture

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

| Input Voltage | Power Consumption | Power Factor | Input Current |
|---------------|-------------------|--------------|------------------------------|
| 120-277Vac | 12W | >0.9 | 0.10A @ 120V 0.04A @ 277V |


PHOTOMETRIC CHARACTERISTICS

| | |
|-----------------------------|----------|
| Color Temperature (CCT) | 5000K |
| Luminous Flux | 1740 lm |
| Color Rendering Index (CRI) | >80 |
| Efficacy | 145 lm/W |
| Visible Light Area | 360° |


RATED LIFE

| | |
|-------------|--------|
| L70 (Hours) | 50,000 |
|-------------|--------|

SPECTRAL DISTRIBUTION

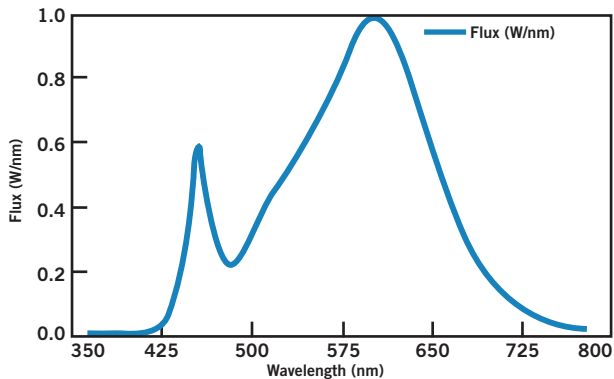

LUX DISTANCE CURVE

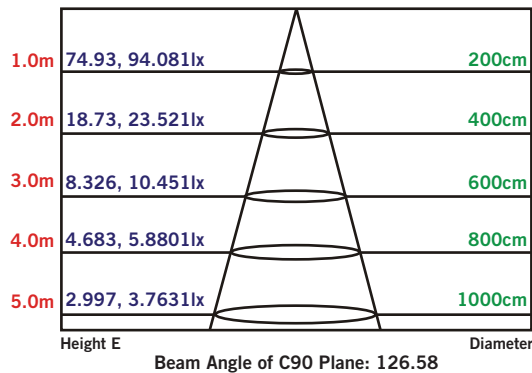



KT-LED12HID-E26-850-D

HID REPLACEMENT LED LAMP

WIRING DIAGRAM

STEP 1

Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

STEP 2

Rewire for line voltage to the lamp socket.

STEP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.



FIGURE 1

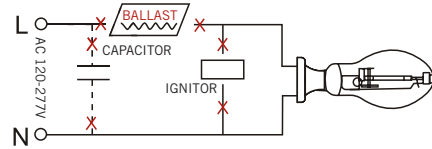


FIGURE 2




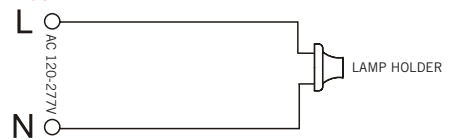


FIGURE 3

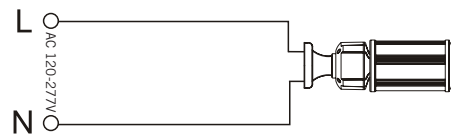

PHYSICAL CHARACTERISTICS

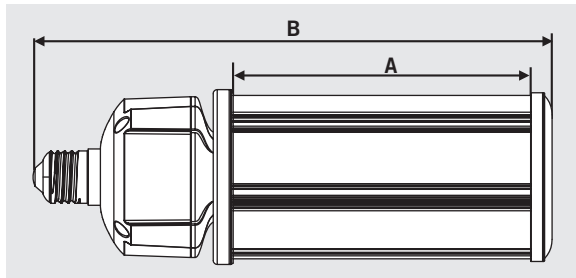

LAMP DIMENSIONS

| | |
|------------------------|-------|
| A (Illuminated Length) | 1.65" |
| B (Body Length) | 4.92" |
| C (Diameter) | 2.36" |


BASE TYPE: E26 (Medium)

ORDERING INFORMATION

| ORDER CODE | PACKAGING STYLE | PACK QTY. | ITEM STATUS |
|--------------------------|---------------------------------------|-----------|-------------|
| KT-LED12HID-E26-850-D-DP | Distributor Pack (Individual Cartons) | 16 | Quick Ship |

CATALOG NUMBER BREAKDOWN

KT-LED12HID-E26-850-D-DP





KT-LED12HID-E26-850-D

HID REPLACEMENT LED LAMP

DESCRIPTION

12W HID Replacement LED Lamp | 5000K | >80 CRI | IP64 Rated



| |
|---|
| LAMP TYPE: HID Replacement LED |
| BASE TYPE: E26 (Medium) |
| WATTAGE: 12W |
| COLOR TEMPERATURE: 5000K |
| METAL HALIDE EQUIVALENT: 50W |
| COLOR RENDERING INDEX (CRI): >80 |
| WARRANTY: 5 Years |



PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed
- Operating Temperature: -40°C/-40°F to 60°C/140°F
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 4kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Suitable for Use in Fully Enclosed Fixture

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

| Input Voltage | Power Consumption | Power Factor | Input Current |
|---------------|-------------------|--------------|------------------------------|
| 120-277Vac | 12W | >0.9 | 0.10A @ 120V 0.04A @ 277V |


PHOTOMETRIC CHARACTERISTICS

| | |
|-----------------------------|----------|
| Color Temperature (CCT) | 5000K |
| Luminous Flux | 1740 lm |
| Color Rendering Index (CRI) | >80 |
| Efficacy | 145 lm/W |
| Visible Light Area | 360° |


RATED LIFE

| | |
|-------------|--------|
| L70 (Hours) | 50,000 |
|-------------|--------|

SPECTRAL DISTRIBUTION

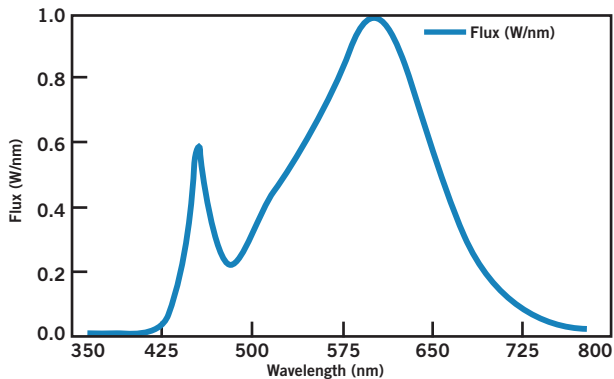

LUX DISTANCE CURVE

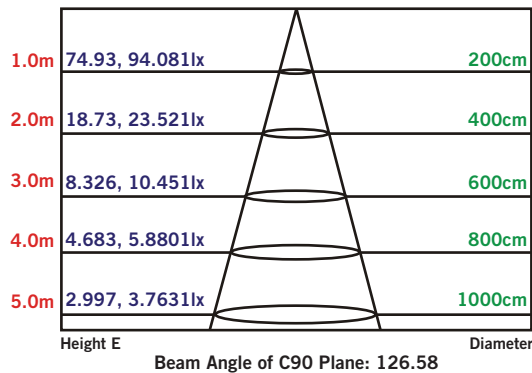



KT-LED12HID-E26-850-D

HID REPLACEMENT LED LAMP

WIRING DIAGRAM

STEP 1

Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

STEP 2

Rewire for line voltage to the lamp socket.

STEP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.

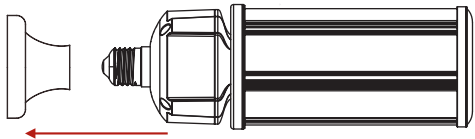


FIGURE 1


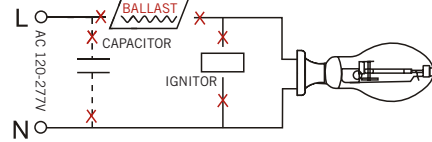




FIGURE 2



FIGURE 3

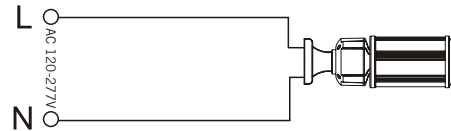

PHYSICAL CHARACTERISTICS

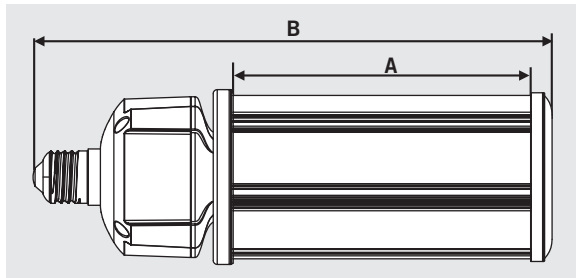

LAMP DIMENSIONS

| | |
|-------------------------------|-------|
| A (Illuminated Length) | 1.65" |
| B (Body Length) | 4.92" |
| C (Diameter) | 2.36" |

BASE TYPE: E26 (Medium)

ORDERING INFORMATION

| ORDER CODE | PACKAGING STYLE | PACK QTY. | ITEM STATUS |
|--------------------------|---------------------------------------|-----------|-------------|
| KT-LED12HID-E26-850-D-DP | Distributor Pack (Individual Cartons) | 16 | Quick Ship |

CATALOG NUMBER BREAKDOWN

KT-LED12HID-E26-850-D-DP

