

Thin Wall Conduit Fittings (for EMT Conduit)

Set Screw Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Set screw connectors and couplings – concrete tight when tapped

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Straight Connectors – Insulated

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 1450US | 1/2" | 50 | 10 |
| 1451US | 3/4" | 25 | 14 |
| 1452US | 1" | 20 | 23 |
| 1453US | 1 1/4" | 5 | 40 |
| 1454US | 1 1/2" | 5 | 52 |
| 1455US | 2" | 20 | 80 |
| 1456US | 2 1/2" | 6 | 142 |
| 1457US | 3" | 6 | 183 |
| 1458US | 3 1/2" | 3 | 250 |
| 1459US | 4" | 3 | 283 |

Straight Connectors – Non-insulated


UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 450SUS | 1/2" | 50 | 10 |
| 451US | 3/4" | 25 | 14 |
| 452US | 1" | 20 | 23 |
| 453US | 1 1/4" | 5 | 40 |
| 454US | 1 1/2" | 5 | 52 |
| 455US | 2" | 20 | 80 |
| 456US | 2 1/2" | 6 | 142 |
| 457US | 3" | 6 | 183 |
| 458US | 3 1/2" | 3 | 250 |
| 459US | 4" | 3 | 283 |

Couplings

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 460US | 1/2" | 50 | 10 |
| 461US | 3/4" | 25 | 15 |
| 462US | 1" | 10 | 24 |
| 463US | 1 1/4" | 5 | 44 |
| 464US | 1 1/2" | 5 | 68 |
| 465US | 2" | 20 | 90 |
| 466US | 2 1/2" | 5 | 158 |
| 467US | 3" | 3 | 217 |
| 468US | 3 1/2" | 2 | 250 |
| 469US | 4" | 2 | 283 |

Product of the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Compression connectors and couplings – concrete tight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Connectors – Insulated

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 1650US | 1/2" | 50 | 8 |
| 1651US | 3/4" | 25 | 12 |
| 1652US | 1" | 20 | 19 |
| 1653US | 1 1/4" | 5 | 30 |
| 1654US | 1 1/2" | 5 | 46 |
| 1655US | 2" | 5 | 55 |
| 1656US | 2 1/2" | 5 | 242 |
| 1657US | 3" | 3 | 307 |
| 1658US | 3 1/2" | 3 | 390 |
| 1659US | 4" | 2 | 492 |

Connectors – Non-insulated

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 650SUS | 1/2" | 50 | 8 |
| 651SUS | 3/4" | 25 | 12 |
| 652US | 1" | 20 | 19 |
| 653US | 1 1/4" | 5 | 30 |
| 654US | 1 1/2" | 5 | 46 |
| 655US | 2" | 5 | 55 |
| 656US | 2 1/2" | 5 | 242 |
| 657US | 3" | 3 | 307 |
| 658US | 3 1/2" | 3 | 390 |
| 659US | 4" | 2 | 492 |

Couplings

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 660SUS | 1/2" | 50 | 8 |
| 661SUS | 3/4" | 25 | 13 |
| 662US | 1" | 20 | 19 |
| 663US | 1 1/4" | 5 | 30 |
| 664US | 1 1/2" | 5 | 46 |
| 665US | 2" | 5 | 60 |
| 666US | 2 1/2" | 5 | 360 |
| 667US | 3" | 3 | 405 |
| 668US | 3 1/2" | 2 | 545 |
| 669US | 4" | 2 | 635 |

Product of the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA – Raintight

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure in raintight environments
- To prevent water seepage into conduit, box or enclosure

Features:

- Flat surface on gland nut provides smooth, flat surface for easy wrenching
- Integral gasketed compression ring secures and seals for reliable installation
- Gasket on male threads of box connector seals installation for raintight connection between the box and the connector
- Available in insulated and non-insulated versions to meet any customer preference
- Angled teeth on locknut for secure bite into enclosure
- Extruded locknut with shoulder provides more threads for more secure installation
- Concrete tight
- Product of the USA

Certifications and Compliances:

- cULus Listed
- Concrete tight
- Raintight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Connectors – Insulated – Raintight

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|----------|--------|-----------|------------------|
| 1650RTUS | 1/2" | 50 | 8 |
| 1651RTUS | 3/4" | 25 | 12 |
| 1652RTUS | 1" | 20 | 19 |
| 1653RTUS | 1 1/4" | 5 | 30 |
| 1654RTUS | 1 1/2" | 5 | 46 |
| 1655RTUS | 2" | 5 | 55 |
| 1656RTUS | 2 1/2" | 1 | 242 |
| 1657RTUS | 3" | 1 | 307 |
| 1658RTUS | 3 1/2" | 1 | 390 |
| 1659RTUS | 4" | 1 | 492 |

Connectors – Non-insulated – Raintight

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| 650RTUS | 1/2" | 50 | 8 |
| 651RTUS | 3/4" | 25 | 12 |
| 652RTUS | 1" | 20 | 19 |
| 653RTUS | 1 1/4" | 5 | 30 |
| 654RTUS | 1 1/2" | 5 | 46 |
| 655RTUS | 2" | 5 | 55 |
| 656RTUS | 2 1/2" | 1 | 242 |
| 657RTUS | 3" | 1 | 307 |
| 658RTUS | 3 1/2" | 1 | 390 |
| 659RTUS | 4" | 1 | 492 |

Couplings – Raintight

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| 660RTUS | 1/2" | 50 | 8 |
| 661RTUS | 3/4" | 25 | 13 |
| 662RTUS | 1" | 20 | 19 |
| 663RTUS | 1 1/4" | 5 | 30 |
| 664RTUS | 1 1/2" | 5 | 46 |
| 665RTUS | 2" | 5 | 60 |
| 666RTUS | 2 1/2" | 1 | 360 |
| 667RTUS | 3" | 1 | 405 |
| 668RTUS | 3 1/2" | 1 | 545 |
| 669RTUS | 4" | 1 | 635 |

Product of the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Conduit Fittings – Product of the USA

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Two Hole

UL File No. E-184283



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| 497 1US | 1/2" | 250 | 2 |
| 497 2US | 3/4" | 150 | 3 |
| 497 3US | 1" | 100 | 5 |
| 497 4US | 1 1/4" | 50 | 8 |
| 497 5US | 1 1/2" | 50 | 13 |
| 497 6US | 2" | 25 | 14 |

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support EMT conduit to mounting surface

UL File No. E-184283



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 200US | 1/2" | 100 | 5 |
| 201US | 3/4" | 100 | 6 |
| 202US | 1" | 100 | 6 |
| 203US* | 1 1/4" | 50 | 13 |
| 204US* | 1 1/2" | 25 | 17 |
| 205US* | 2" | 25 | 20 |
| 206US* | 2 1/2" | 25 | 64 |
| 207US* | 3" | 25 | 71 |
| 208US* | 3 1/2" | 25 | 120 |
| 209US* | 4" | 10 | 130 |

*Not UL Listed or cUL Listed.

NAILING STRAPS – STAMPED STEEL PRODUCT OF THE USA

Applications:

- To secure EMT conduit

Standard Material:


- Pre-galvanized stamped steel



| Cat. # | Conduit Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------------|-----------|------------------|
| NSS1US | 1/2" | 100 | 2 |
| NSS2US | 3/4" | 100 | 2 |
| NSS3US | 1" | 100 | 3 |

Dimensions (in Inches):

| Cat. # | A | B | C | Radius |
|--------|-------|-------|-------|--------|
| NSS1US | 2.100 | 1.040 | 0.080 | 0.350 |
| NSS2US | 2.300 | 1.275 | 0.080 | 0.460 |
| NSS3US | 2.200 | 1.500 | 0.080 | 0.580 |



Product of
the USA

Rigid/Intermediate Grade Conduit Fittings

Conduit Fittings – Product of the USA

THREE-PIECE CONDUIT COUPLINGS – STEEL PRODUCT OF THE USA

Applications:

- To join two lengths of threaded conduit; couples conduit when conduit cannot be turned

Standard Material:

- Heavy duty casting

Standard Finish:

- Zinc plated

Steel

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 190US | 1/2" | 20 | 36 |
| 191US | 3/4" | 20 | 32 |
| 192US | 1" | 5 | 55 |
| 193US | 1 1/4" | 5 | 119 |
| 194US | 1 1/2" | 5 | 140 |
| 195US | 2" | 5 | 199 |

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Applications:

- Used to secure rigid conduit or IMC to mounting surface

Two Hole

UL File No. E-184283



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|----------|--------|-----------|------------------|
| 496 3US | 1/2" | 150 | 2 |
| 496 4US | 3/4" | 100 | 3 |
| 496 5US | 1" | 50 | 7 |
| 496 6US | 1 1/4" | 50 | 8 |
| 496 7US | 1 1/2" | 50 | 10 |
| 496 8US | 2" | 25 | 15 |
| 496 9US | 2 1/2" | 25 | 19 |
| 496 10US | 3" | 25 | 23 |
| 496 11US | 3 1/2" | 25 | 93 |
| 496 12US | 4" | 10 | 108 |

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support rigid conduit and IMC to mounting surface



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 410US | 1/2" | 100 | 5 |
| 411US | 3/4" | 50 | 6 |
| 412US | 1" | 50 | 11 |
| 413US | 1 1/4" | 50 | 13 |
| 414US | 1 1/2" | 25 | 20 |
| 415US | 2" | 25 | 22 |

CONDUIT LOCKNUTS – STEEL PRODUCT OF THE USA

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 11USA | 1/2" | 200 | 1 |
| 12USA | 3/4" | 100 | 2 |
| 13USA | 1" | 50 | 4 |
| 14USA | 1 1/4" | 50 | 7 |
| 15USA | 1 1/2" | 25 | 8 |
| 16USA | 2" | 25 | 9 |

BEAM CLAMPS/INSULATOR SUPPORTS – STEEL PRODUCT OF THE USA



| Cat. # | Base Size | Jaw Opening | Tapped Holes | Unit Qty. | Wt. Lbs. Per 100 |
|--------|-----------|-------------|--------------|-----------|------------------|
| 529SUS | 3/4" | 5/8" | 1/4" - 20 | 300 | 13 |

Product of the USA

Rigid/Intermediate Grade Conduit Fittings

Conduit Fittings – Product of the USA

TYPE CPR COMPRESSION FITTINGS PRODUCT OF THE USA

Applications:

Use Type CPR Product of the USA Compression Fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:


- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of

Certifications and Compliances:

- UL514B Fittings for Conduit and Outlet Boxes

Standard Materials:

- Bodies – steel
- Compression nuts – steel
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – glass-reinforced polypropylene

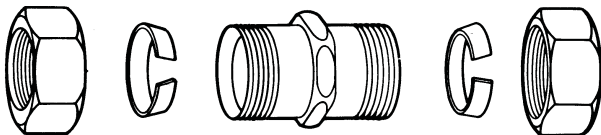

Straight Connectors – Insulated

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| CPR11US | 1/2" | 25 | 13 |
| CPR12US | 3/4" | 20 | 20 |
| CPR13US | 1" | 5 | 36 |
| CPR14US | 1 1/4" | 5 | 48 |
| CPR15US | 1 1/2" | 5 | 70 |
| CPR16US | 2" | 5 | 100 |

Straight Connectors – Non-insulated

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR1US | 1/2" | 25 | 13 |
| CPR2US | 3/4" | 20 | 20 |
| CPR3US | 1" | 5 | 36 |
| CPR4US | 1 1/4" | 5 | 48 |
| CPR5US | 1 1/2" | 5 | 70 |
| CPR6US | 2" | 5 | 100 |

Couplings

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| CPR21US | 1/2" | 20 | 16 |
| CPR22US | 3/4" | 20 | 24 |
| CPR23US | 1" | 5 | 48 |
| CPR24US | 1 1/4" | 5 | 64 |
| CPR25US | 1 1/2" | 5 | 110 |
| CPR26US | 2" | 3 | 140 |

CABLE AND CONDUIT HANGERS – STEEL PRODUCT OF THE USA

Certifications and Compliances:

- UL Listed

With Bolt

UL File No. E-184283



| Cat. # | Conduit Size | | Unit Qty. | Wt. Lbs. Per 100 |
|----------|--------------|---------------|-----------|------------------|
| | EMT | Rigid | | |
| 0BUS | 1/2" | 3/8" and 1/2" | 100 | 6 |
| 1BUS | 3/4" | 3/4" | 100 | 6 |
| 2BUS | 1" | 1" | 100 | 8 |
| 2 1/2BUS | 1 1/4" | - | 100 | 10 |
| 3BUS | 1 1/2" | 1 1/4" | 100 | 11 |
| 4BUS | - | 1 1/2" | 100 | 16 |
| 5BUS | 2" | 2" | 50 | 23 |
| 6BUS | 2 1/2" | 2 1/2" | 50 | 29 |
| 7BUS | 3" | 3" | 25 | 31 |
| 8BUS | 3 1/2" | 3 1/2" | 10 | 38 |
| 9BUS | 4" | 4" | 10 | 38 |

Product of the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Set Screw Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Set screw connectors and couplings – concrete tight when tapped

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Straight Connectors – Insulated

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 1450US | 1/2" | 50 | 10 |
| 1451US | 3/4" | 25 | 14 |
| 1452US | 1" | 20 | 23 |
| 1453US | 1 1/4" | 5 | 40 |
| 1454US | 1 1/2" | 5 | 52 |
| 1455US | 2" | 20 | 80 |
| 1456US | 2 1/2" | 6 | 142 |
| 1457US | 3" | 6 | 183 |
| 1458US | 3 1/2" | 3 | 250 |
| 1459US | 4" | 3 | 283 |

Straight Connectors – Non-insulated


UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 450SUS | 1/2" | 50 | 10 |
| 451US | 3/4" | 25 | 14 |
| 452US | 1" | 20 | 23 |
| 453US | 1 1/4" | 5 | 40 |
| 454US | 1 1/2" | 5 | 52 |
| 455US | 2" | 20 | 80 |
| 456US | 2 1/2" | 6 | 142 |
| 457US | 3" | 6 | 183 |
| 458US | 3 1/2" | 3 | 250 |
| 459US | 4" | 3 | 283 |

Couplings

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 460US | 1/2" | 50 | 10 |
| 461US | 3/4" | 25 | 15 |
| 462US | 1" | 10 | 24 |
| 463US | 1 1/4" | 5 | 44 |
| 464US | 1 1/2" | 5 | 68 |
| 465US | 2" | 20 | 90 |
| 466US | 2 1/2" | 5 | 158 |
| 467US | 3" | 3 | 217 |
| 468US | 3 1/2" | 2 | 250 |
| 469US | 4" | 2 | 283 |

Product of the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Compression connectors and couplings – concrete tight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Connectors – Insulated

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 1650US | 1/2" | 50 | 8 |
| 1651US | 3/4" | 25 | 12 |
| 1652US | 1" | 20 | 19 |
| 1653US | 1 1/4" | 5 | 30 |
| 1654US | 1 1/2" | 5 | 46 |
| 1655US | 2" | 5 | 55 |
| 1656US | 2 1/2" | 5 | 242 |
| 1657US | 3" | 3 | 307 |
| 1658US | 3 1/2" | 3 | 390 |
| 1659US | 4" | 2 | 492 |

Connectors – Non-insulated

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 650SUS | 1/2" | 50 | 8 |
| 651SUS | 3/4" | 25 | 12 |
| 652US | 1" | 20 | 19 |
| 653US | 1 1/4" | 5 | 30 |
| 654US | 1 1/2" | 5 | 46 |
| 655US | 2" | 5 | 55 |
| 656US | 2 1/2" | 5 | 242 |
| 657US | 3" | 3 | 307 |
| 658US | 3 1/2" | 3 | 390 |
| 659US | 4" | 2 | 492 |

Couplings

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 660SUS | 1/2" | 50 | 8 |
| 661SUS | 3/4" | 25 | 13 |
| 662US | 1" | 20 | 19 |
| 663US | 1 1/4" | 5 | 30 |
| 664US | 1 1/2" | 5 | 46 |
| 665US | 2" | 5 | 60 |
| 666US | 2 1/2" | 5 | 360 |
| 667US | 3" | 3 | 405 |
| 668US | 3 1/2" | 2 | 545 |
| 669US | 4" | 2 | 635 |

Product of
the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA – Raintight

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure in raintight environments
- To prevent water seepage into conduit, box or enclosure

Features:

- Flat surface on gland nut provides smooth, flat surface for easy wrenching
- Integral gasketed compression ring secures and seals for reliable installation
- Gasket on male threads of box connector seals installation for raintight connection between the box and the connector
- Available in insulated and non-insulated versions to meet any customer preference
- Angled teeth on locknut for secure bite into enclosure
- Extruded locknut with shoulder provides more threads for more secure installation
- Concrete tight
- Product of the USA

Certifications and Compliances:

- cULus Listed
- Concrete tight
- Raintight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Connectors – Insulated – Raintight

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|----------|--------|-----------|------------------|
| 1650RTUS | 1/2" | 50 | 8 |
| 1651RTUS | 3/4" | 25 | 12 |
| 1652RTUS | 1" | 20 | 19 |
| 1653RTUS | 1 1/4" | 5 | 30 |
| 1654RTUS | 1 1/2" | 5 | 46 |
| 1655RTUS | 2" | 5 | 55 |
| 1656RTUS | 2 1/2" | 1 | 242 |
| 1657RTUS | 3" | 1 | 307 |
| 1658RTUS | 3 1/2" | 1 | 390 |
| 1659RTUS | 4" | 1 | 492 |

Connectors – Non-insulated – Raintight

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| 650RTUS | 1/2" | 50 | 8 |
| 651RTUS | 3/4" | 25 | 12 |
| 652RTUS | 1" | 20 | 19 |
| 653RTUS | 1 1/4" | 5 | 30 |
| 654RTUS | 1 1/2" | 5 | 46 |
| 655RTUS | 2" | 5 | 55 |
| 656RTUS | 2 1/2" | 1 | 242 |
| 657RTUS | 3" | 1 | 307 |
| 658RTUS | 3 1/2" | 1 | 390 |
| 659RTUS | 4" | 1 | 492 |

Couplings – Raintight

UL File No. E-22132



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| 660RTUS | 1/2" | 50 | 8 |
| 661RTUS | 3/4" | 25 | 13 |
| 662RTUS | 1" | 20 | 19 |
| 663RTUS | 1 1/4" | 5 | 30 |
| 664RTUS | 1 1/2" | 5 | 46 |
| 665RTUS | 2" | 5 | 60 |
| 666RTUS | 2 1/2" | 1 | 360 |
| 667RTUS | 3" | 1 | 405 |
| 668RTUS | 3 1/2" | 1 | 545 |
| 669RTUS | 4" | 1 | 635 |

Product of the USA

Thin Wall Conduit Fittings (for EMT Conduit)

Conduit Fittings – Product of the USA

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Two Hole

UL File No. E-184283



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| 497 1US | 1/2" | 250 | 2 |
| 497 2US | 3/4" | 150 | 3 |
| 497 3US | 1" | 100 | 5 |
| 497 4US | 1 1/4" | 50 | 8 |
| 497 5US | 1 1/2" | 50 | 13 |
| 497 6US | 2" | 25 | 14 |

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support EMT conduit to mounting surface

UL File No. E-184283



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 200US | 1/2" | 100 | 5 |
| 201US | 3/4" | 100 | 6 |
| 202US | 1" | 100 | 6 |
| 203US* | 1 1/4" | 50 | 13 |
| 204US* | 1 1/2" | 25 | 17 |
| 205US* | 2" | 25 | 20 |
| 206US* | 2 1/2" | 25 | 64 |
| 207US* | 3" | 25 | 71 |
| 208US* | 3 1/2" | 25 | 120 |
| 209US* | 4" | 10 | 130 |

*Not UL Listed or cUL Listed.

NAILING STRAPS – STAMPED STEEL PRODUCT OF THE USA

Applications:

- To secure EMT conduit

Standard Material:


- Pre-galvanized stamped steel



| Cat. # | Conduit Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------------|-----------|------------------|
| NSS1US | 1/2" | 100 | 2 |
| NSS2US | 3/4" | 100 | 2 |
| NSS3US | 1" | 100 | 3 |

Dimensions (in Inches):

| Cat. # | A | B | C | Radius |
|--------|-------|-------|-------|--------|
| NSS1US | 2.100 | 1.040 | 0.080 | 0.350 |
| NSS2US | 2.300 | 1.275 | 0.080 | 0.460 |
| NSS3US | 2.200 | 1.500 | 0.080 | 0.580 |



Product of
the USA

Rigid/Intermediate Grade Conduit Fittings

Conduit Fittings – Product of the USA

THREE-PIECE CONDUIT COUPLINGS – STEEL PRODUCT OF THE USA

Applications:

- To join two lengths of threaded conduit; couples conduit when conduit cannot be turned

Standard Material:

- Heavy duty casting

Standard Finish:

- Zinc plated

Steel

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 190US | 1/2" | 20 | 36 |
| 191US | 3/4" | 20 | 32 |
| 192US | 1" | 5 | 55 |
| 193US | 1 1/4" | 5 | 119 |
| 194US | 1 1/2" | 5 | 140 |
| 195US | 2" | 5 | 199 |

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Applications:

- Used to secure rigid conduit or IMC to mounting surface

Two Hole

UL File No. E-184283



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|----------|--------|-----------|------------------|
| 496 3US | 1/2" | 150 | 2 |
| 496 4US | 3/4" | 100 | 3 |
| 496 5US | 1" | 50 | 7 |
| 496 6US | 1 1/4" | 50 | 8 |
| 496 7US | 1 1/2" | 50 | 10 |
| 496 8US | 2" | 25 | 15 |
| 496 9US | 2 1/2" | 25 | 19 |
| 496 10US | 3" | 25 | 23 |
| 496 11US | 3 1/2" | 25 | 93 |
| 496 12US | 4" | 10 | 108 |

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support rigid conduit and IMC to mounting surface



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 410US | 1/2" | 100 | 5 |
| 411US | 3/4" | 50 | 6 |
| 412US | 1" | 50 | 11 |
| 413US | 1 1/4" | 50 | 13 |
| 414US | 1 1/2" | 25 | 20 |
| 415US | 2" | 25 | 22 |

CONDUIT LOCKNUTS – STEEL PRODUCT OF THE USA

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| 11USA | 1/2" | 200 | 1 |
| 12USA | 3/4" | 100 | 2 |
| 13USA | 1" | 50 | 4 |
| 14USA | 1 1/4" | 50 | 7 |
| 15USA | 1 1/2" | 25 | 8 |
| 16USA | 2" | 25 | 9 |

BEAM CLAMPS/INSULATOR SUPPORTS – STEEL PRODUCT OF THE USA



| Cat. # | Base Size | Jaw Opening | Tapped Holes | Unit Qty. | Wt. Lbs. Per 100 |
|--------|-----------|-------------|--------------|-----------|------------------|
| 529SUS | 3/4" | 5/8" | 1/4" - 20 | 300 | 13 |

Product of the USA

Rigid/Intermediate Grade Conduit Fittings

Conduit Fittings – Product of the USA

TYPE CPR COMPRESSION FITTINGS PRODUCT OF THE USA

Applications:

Use Type CPR Product of the USA Compression Fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:


- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of

Certifications and Compliances:

- UL514B Fittings for Conduit and Outlet Boxes

Standard Materials:

- Bodies – steel
- Compression nuts – steel
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – glass-reinforced polypropylene

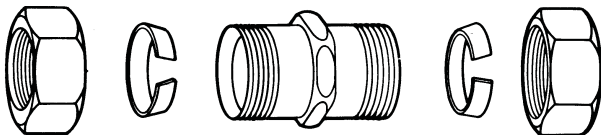

Straight Connectors – Insulated

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| CPR11US | 1/2" | 25 | 13 |
| CPR12US | 3/4" | 20 | 20 |
| CPR13US | 1" | 5 | 36 |
| CPR14US | 1 1/4" | 5 | 48 |
| CPR15US | 1 1/2" | 5 | 70 |
| CPR16US | 2" | 5 | 100 |

Straight Connectors – Non-insulated

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR1US | 1/2" | 25 | 13 |
| CPR2US | 3/4" | 20 | 20 |
| CPR3US | 1" | 5 | 36 |
| CPR4US | 1 1/4" | 5 | 48 |
| CPR5US | 1 1/2" | 5 | 70 |
| CPR6US | 2" | 5 | 100 |

Couplings

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|---------|--------|-----------|------------------|
| CPR21US | 1/2" | 20 | 16 |
| CPR22US | 3/4" | 20 | 24 |
| CPR23US | 1" | 5 | 48 |
| CPR24US | 1 1/4" | 5 | 64 |
| CPR25US | 1 1/2" | 5 | 110 |
| CPR26US | 2" | 3 | 140 |

CABLE AND CONDUIT HANGERS – STEEL PRODUCT OF THE USA

Certifications and Compliances:

- UL Listed

With Bolt

UL File No. E-184283



| Cat. # | Conduit Size | | Unit Qty. | Wt. Lbs. Per 100 |
|----------|--------------|---------------|-----------|------------------|
| | EMT | Rigid | | |
| 0BUS | 1/2" | 3/8" and 1/2" | 100 | 6 |
| 1BUS | 3/4" | 3/4" | 100 | 6 |
| 2BUS | 1" | 1" | 100 | 8 |
| 2 1/2BUS | 1 1/4" | - | 100 | 10 |
| 3BUS | 1 1/2" | 1 1/4" | 100 | 11 |
| 4BUS | - | 1 1/2" | 100 | 16 |
| 5BUS | 2" | 2" | 50 | 23 |
| 6BUS | 2 1/2" | 2 1/2" | 50 | 29 |
| 7BUS | 3" | 3" | 25 | 31 |
| 8BUS | 3 1/2" | 3 1/2" | 10 | 38 |
| 9BUS | 4" | 4" | 10 | 38 |

Product of the USA