


# Type 4 Panel Enclosures

## Premier™ Series Accessories

Discount Schedule: C2

### Panels Subclass: TDP

Premier panels can be installed in any Premier Series enclosure and are up to 20% larger than standard NEMA panels. Panels above 24" are flanged. Steel panels have a white polyester powder paint finish. Stainless Steel and conductive galvanized sizes are available as shown in chart.




| Catalog Number |       |           | Panel Size H x W |            | Gauge |
|----------------|-------|-----------|------------------|------------|-------|
| Conductive     | Steel | Stainless | in.              | mm         |       |
| 108GP          | 108P  | 108PSS4   | 8.00 x 6.00      | 203 x 152  | 14    |
| 1210GP         | 1210P | 1210PSS4  | 10.00 x 8.00     | 254 x 203  | 14    |
| 1212GP         | 1212P | 1212PSS4  | 10.00 x 10.00    | 254 x 254  | 14    |
| 1612GP         | 1612P | 1612PSS4  | 14.00 x 10.00    | 356 x 254  | 14    |
| 1616GP         | 1616P | 1616PSS4  | 14.00 x 14.00    | 356 x 356  | 12    |
| 2016GP         | 2016P | 2016PSS4  | 18.00 x 14.00    | 457 x 356  | 12    |
| 2020GP         | 2020P | 2020PSS4  | 18.00 x 18.00    | 457 x 457  | 12    |
| 2416GP         | 2416P | 2416PSS4  | 22.00 x 14.00    | 559 x 356  | 12    |
| 2420GP         | 2420P | 2420PSS4  | 22.00 x 18.00    | 559 x 457  | 12    |
| 2424GP         | 2424P | 2424PSS4  | 22.00 x 22.00    | 559 x 559  | 12    |
| 2442GP         | 2442P | 2442PSS4  | 22.00 x 40.00    | 559 x 1016 | 12    |
| 3020GP         | 3020P | 3020PSS4  | 28.00 x 18.00    | 711 x 457  | 12    |
| 3024GP         | 3024P | 3024PSS4  | 28.00 x 22.00    | 711 x 559  | 12    |
| 3030GP         | 3030P | 3030PSS4  | 28.00 x 28.00    | 711 x 711  | 12    |
| 3048GP         | 3048P | 3048PSS4  | 28.00 x 46.00    | 711 x 1168 | 12    |
| 3060GP         | 3060P | 3060PSS4  | 28.00 x 58.00    | 711 x 1473 | 12    |
| 3624GP         | 3624P | 3624PSS4  | 34.00 x 22.00    | 864 x 559  | 12    |
| 3630GP         | 3630P | 3630PSS4  | 34.00 x 28.00    | 864 x 711  | 12    |
| 3636GP         | 3636P | 3636PSS4  | 34.00 x 34.00    | 864 x 864  | 12    |
| 4230GP         | 4230P | 4230PSS4  | 40.00 x 28.00    | 1016 x 711 | 12    |
| 4236GP         | 4236P | 4236PSS4  | 40.00 x 34.00    | 1016 x 864 | 12    |
| 4824GP         | 4824P | 4824PSS4  | 46.00 x 22.00    | 1168 x 559 | 12    |
| 4836GP         | 4836P | 4836PSS4  | 46.00 x 34.00    | 1168 x 864 | 12    |
| 6036GP         | 6036P | 6036PSS4  | 58.00 x 34.00    | 1473 x 864 | 12    |

### NEMA Panel Adapters Subclass: TD0

NEMA panel adapters allow standard NEMA panels to be used in Premier series enclosures. Decreased height and width of NEMA panels increase space around panel for wire management. Kit includes four adapters and four .375-16 flanged hex nuts.

Finish: Zinc Plated


(Note: Cannot be used with enclosures 12" x 12" (305 mm x 305 mm) or smaller.)

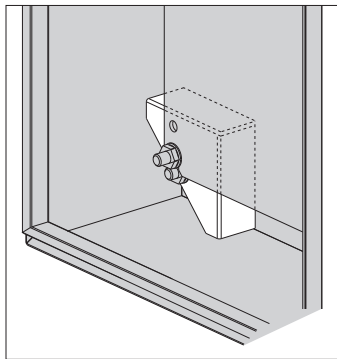

| Catalog Number | Qty. | For use with Premier Enclosures |
|----------------|------|---------------------------------|
| PCK4           | 4    | 30" x 30" or smaller            |

### Mounting Foot Kits Subclass: TD0

Mounting foot kits are available in stainless steel. Four feet and hardware are included.

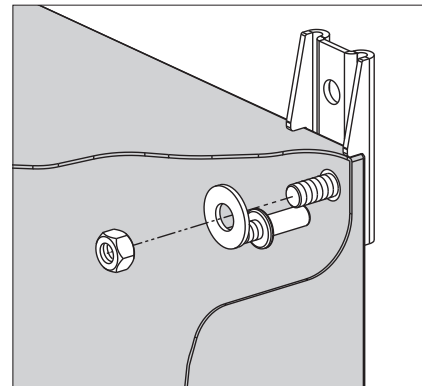

| Catalog Number | Qty. | Description       |
|----------------|------|-------------------|
| WMK            | 4    | Zinc Plated Steel |

Notes: Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

## Premier™ Series Accessories


Discount Schedule: C2

Subclass: TD0

### Swing-Out Panels

Swing-out panels offer a means for mounting user components and equipment near the front of an enclosure opening. Panel pivots from front of enclosure to allow easy access to internal equipment. Swing-out panels are 14 gauge with a white polyester powder finish and includes all hardware for mounting to front flange of enclosure.

**(Note:** Cannot be used in conjunction with depth adjustment brackets).

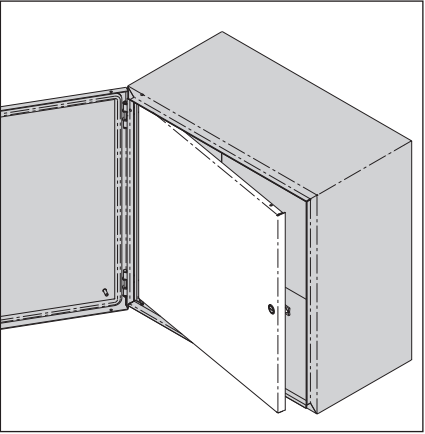


Note: Swing-out panel distance from panel face to inside of enclosure cover equals 1 1/4".

| Catalog Number | Panel Size    |           | For use with Premier Enclosures A x B |
|----------------|---------------|-----------|---------------------------------------|
|                | Height        | Width     |                                       |
| 1212SP         | 9.78 x 9.84   | 248 x 250 | 12"x12"                               |
| 1612SP         | 13.78 x 9.84  | 350 x 250 | 16"x12"                               |
| 1616SP         | 13.78 x 13.84 | 350 x 352 | 16"x16"                               |
| 1620SP         | 13.78 x 17.84 | 350 x 453 | 16"x20"                               |
| 2016SP         | 17.78 x 13.84 | 452 x 352 | 20"x16"                               |
| 2020SP         | 17.78 x 17.84 | 452 x 453 | 20"x20"                               |
| 2024SP         | 17.78 x 21.84 | 452 x 555 | 20"x24"                               |
| 2416SP         | 21.78 x 13.84 | 553 x 352 | 24"x16"                               |
| 2420SP         | 21.78 x 17.84 | 553 x 453 | 24"x20"                               |
| 2424SP         | 21.78 x 21.84 | 553 x 555 | 24"x24"                               |
| 3020SP         | 27.78 x 17.84 | 706 x 453 | 30"x20"                               |
| 3024SP         | 27.78 x 21.84 | 706 x 555 | 30"x24"                               |
| 3030SP         | 27.78 x 27.84 | 706 x 707 | 30"x30"                               |
| 3624SP         | 33.78 x 21.84 | 858 x 555 | 36"x24"                               |
| 3630SP         | 33.78 x 27.84 | 858 x 707 | 36"x30"                               |
| 3636SP         | 33.78 x 33.84 | 858 x 860 | 36"x36"                               |

### Dead Front Panels

Dead front kits offer a means for mounting user components and equipment near the front of an enclosure opening. Also, creates a barrier and controls access to the enclosure interior. Kit includes ANSI 61 gray panel and all hardware for mounting to enclosures.

**(Note:** Cannot be used in conjunction with depth adjustment brackets).

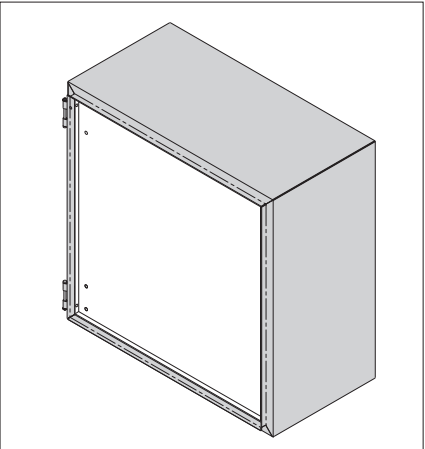


Note: Dead front panel distance from panel face to inside of enclosure cover equals 1 1/4".

| Catalog Number | For use with Premier Enclosures A x B |
|----------------|---------------------------------------|
|                |                                       |
| 1612DF         | 16"x12"                               |
| 2016DF         | 20"x16"                               |
| 2020DF         | 20"x20"                               |
| 2420DF         | 24"x20"                               |
| 2424DF         | 24"x24"                               |
| 3024DF         | 30"x24"                               |

### Mounting Channels

Mounting channels create a vertical or horizontal framework for DIN rail, flexible mounting straps, or other component attachment. Two channels provided for mounting on enclosure collar studs. Finish: Zinc Plated

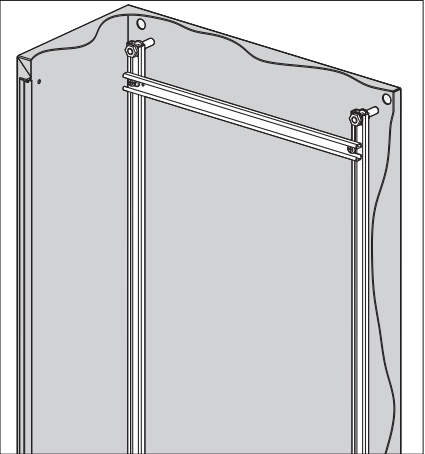

| Catalog Number | Qty. | For use with Premier Enclosures |
|----------------|------|---------------------------------|
|                |      |                                 |
| 16MC           | 2    | 16" height or width             |
| 20MC           | 2    | 20" height or width             |
| 24MC           | 2    | 24" height or width             |
| 30MC           | 2    | 30" height or width             |
| 36MC           | 2    | 36" height or width             |
| 42MC           | 2    | 42" height or width             |
| 48MC           | 2    | 48" height or width             |
| 60MC           | 2    | 60" height or width             |

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

# Type 4 Panel Enclosures


## Premier™ Series Accessories

Discount Schedule: C2

Subclass: TD0

### DIN Rail Kits


DIN rail kits provide flexibility for mounting DIN type snap-on equipment. Three styles; TS32x15, slotted; TS35x7.5, slotted; TS35x15, slotted all attach to collar studs either horizontally or vertically. Three DIN rails, screws and channel nuts are provided. Finish: Yellow Zinc

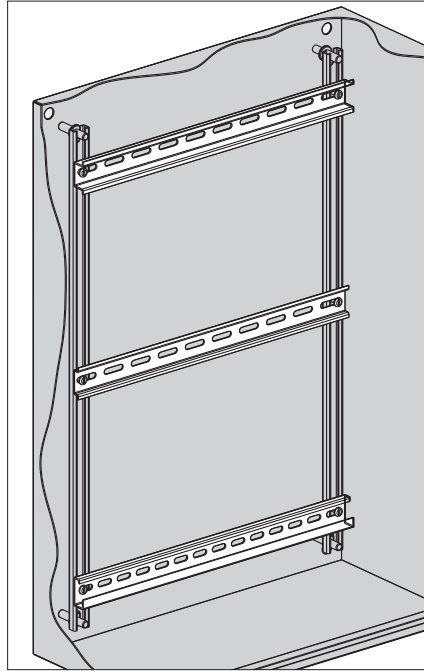

| Catalog Number | Description         | For use with Premier Enclosures |
|----------------|---------------------|---------------------------------|
| 12DR1P         | TS32 x 15, slotted  | 12" height or width             |
| 16DR1P         | TS32 x 15, slotted  | 16" height or width             |
| 20DR1P         | TS32 x 15, slotted  | 20" height or width             |
| 24DR1P         | TS32 x 15, slotted  | 24" height or width             |
| 12DR3P         | TS35 x 7.5, slotted | 12" height or width             |
| 16DR3P         | TS35 x 7.5, slotted | 16" height or width             |
| 20DR3P         | TS35 x 7.5, slotted | 20" height or width             |
| 24DR3P         | TS35 x 7.5, slotted | 24" height or width             |
| 12DRCP         | TS35 x 15, slotted  | 12" height or width             |
| 16DRCP         | TS35 x 15, slotted  | 16" height or width             |
| 20DRCP         | TS35 x 15, slotted  | 20" height or width             |
| 24DRCP         | TS35 x 15, slotted  | 24" height or width             |

### Flexible Mounting Straps

Flexible mounting straps offer a versatile, horizontal or vertical mounting method inside enclosure body. Two designs; 1-hole or 3-hole pattern increase mounting flexibility and attach to enclosure collar studs. Flexible mounting strap kit contains two straps and hardware. Finish: Zinc Plated

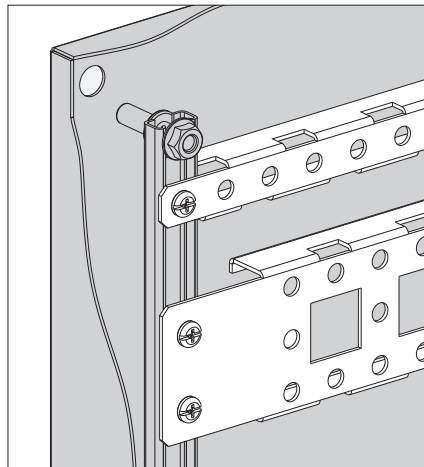

| Catalog Number | Description | Fits Premier Premier Enclosures |
|----------------|-------------|---------------------------------|
| 12GS1          | 1 hole      | 12" height or width             |
| 16GS1          | 1 hole      | 16" height or width             |
| 20GS1          | 1 hole      | 20" height or width             |
| 24GS1          | 1 hole      | 24" height or width             |
| 30GS1          | 1 hole      | 30" height or width             |
| 36GS3          | 3 hole      | 36" height or width             |
| 42GS3          | 3 hole      | 42" height or width             |
| 48GS3          | 3 hole      | 48" height or width             |
| 60GS3          | 3 hole      | 60" height or width             |

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

## Premier™ Series Accessories


Discount Schedule: C2

Subclass: TD0

### Rack Mounting Angles

Relay rack angles are designed for mounting EIA 19" rack mount equipment inside 24" wide enclosures. Fabricated from 14 gauge steel and zinc plated. Rack angles are mounted to enclosure flange with hardware provided. Rack mount angles are untapped and require screws and cage nuts for equipment mounting (order separately).

Finish: Zinc Plated

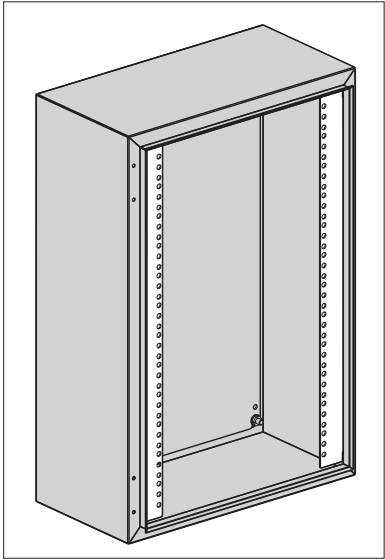


| Catalog Number | For use with Premier Enclosures | Mounting Units |
|----------------|---------------------------------|----------------|
| 10URMA         | 20" height                      | 10             |
| 12URMA         | 24" height                      | 12             |
| 16URMA         | 30" height                      | 16             |
| 19URMA         | 36" height                      | 19             |
| 26URMA         | 48" height                      | 26             |

Universal Spacing [5/8" (16mm), 5/8" (16mm), 1/2" (13mm)]

### Swing-Out Rack Frames

Swing-out rack frames allow mounting of EIA 19" rack mount equipment. Flexible pivoting framework provides access to back of equipment or other internal components. Designed for use with 24" wide Premier series enclosures. Mounting hardware included. Swing-out rack frame holes are untapped and require screws and cage nuts for equipment mounting (order separately).

**(Note:** Cannot be used in conjunction with depth adjustment brackets).  
Finish: ANSI Gray Polyester Powder

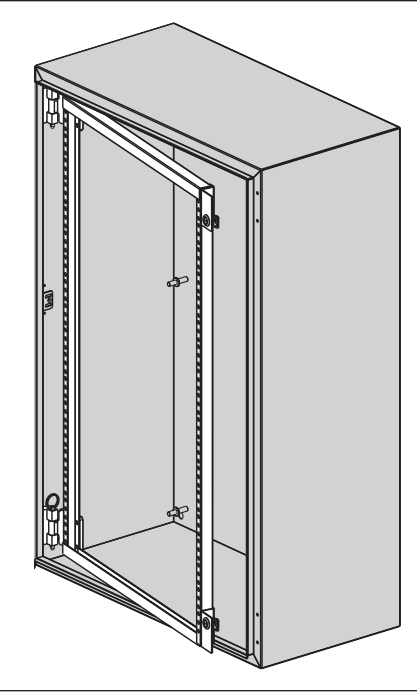

| Catalog Number | For use with Premier Enclosures | Mounting Units |
|----------------|---------------------------------|----------------|
| 2424SF         | 24" x 24"                       | 11             |
| 3024SF         | 30" x 24"                       | 15             |
| 3624SF         | 36" x 24"                       | 18             |

Universal Spacing [5/8" (16mm), 5/8" (16mm), 1/2" (13mm)]

Type 4 Panel Enclosures

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

# Type 4 Panel Enclosures

## Premier™ Series Accessories

Discount Schedule: C2

Subclass: TD0

### Handles

Padlocking, key-locking or non-locking handles are interchangeable with standard slotted quarter-turn flush latch on Premier series enclosures. Available keyed alike or keyed different, please specify when ordering.



| Catalog Number | Description                               | Latch Type   |
|----------------|---|--------------|
| WMHNL          | Wall-mount handle, non-locking            | Single point |
| WMHK-01        | Wall-mount handle, key-locking - keyed 01 | Single point |
| WMHK-02        | Wall-mount handle, key-locking - keyed 02 | Single point |
| WMHK-03        | Wall-mount handle, key-locking - keyed 03 | Single point |
| WMHK-04        | Wall-mount handle, key-locking - keyed 04 | Single point |
| WMHPTO         | Wall-mount handle, padlockable            | Single point |
| SD-KHB         | Black die cast zinc, key-locking handle   | 3-point      |

### Security Latch Inserts

Security latch inserts interchange with slotted quarter-turn flush latch and provide security and control access to interior of enclosure. Inserts include matching key.



7MTLK

| Catalog Number | Description                 | Latch Type   |
|----------------|-----------------------------|--------------|
| 7MTLK          | 7mm triangular latch insert | Single point |
| 7MSLK          | 7mm square latch insert     | Single point |
| 3MDBLK         | 3mm double bit latch insert | Single point |



7MSLK



3MDBLK

### Print Pockets

Print pockets provide a convenient place to store operation manuals, diagrams, or other documents inside the enclosure. Thermoplastic pockets are gray and have cut away areas for viewing contents. Pockets have adhesive backing for mounting inside on enclosure door.



| Catalog Number | Length x Width |
|----------------|----------------|
| 32170          | 6" x 6"        |
| 32171          | 10" x 10"      |

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.


# Type 4 Panel Enclosures

## Premier™ Series Accessories

Discount Schedule: C2

### Panels Subclass: TDP

Premier panels can be installed in any Premier Series enclosure and are up to 20% larger than standard NEMA panels. Panels above 24" are flanged. Steel panels have a white polyester powder paint finish. Stainless Steel and conductive galvanized sizes are available as shown in chart.




| Catalog Number |       |           | Panel Size H x W |            | Gauge |
|----------------|-------|-----------|------------------|------------|-------|
| Conductive     | Steel | Stainless | in.              | mm         |       |
| 108GP          | 108P  | 108PSS4   | 8.00 x 6.00      | 203 x 152  | 14    |
| 1210GP         | 1210P | 1210PSS4  | 10.00 x 8.00     | 254 x 203  | 14    |
| 1212GP         | 1212P | 1212PSS4  | 10.00 x 10.00    | 254 x 254  | 14    |
| 1612GP         | 1612P | 1612PSS4  | 14.00 x 10.00    | 356 x 254  | 14    |
| 1616GP         | 1616P | 1616PSS4  | 14.00 x 14.00    | 356 x 356  | 12    |
| 2016GP         | 2016P | 2016PSS4  | 18.00 x 14.00    | 457 x 356  | 12    |
| 2020GP         | 2020P | 2020PSS4  | 18.00 x 18.00    | 457 x 457  | 12    |
| 2416GP         | 2416P | 2416PSS4  | 22.00 x 14.00    | 559 x 356  | 12    |
| 2420GP         | 2420P | 2420PSS4  | 22.00 x 18.00    | 559 x 457  | 12    |
| 2424GP         | 2424P | 2424PSS4  | 22.00 x 22.00    | 559 x 559  | 12    |
| 2442GP         | 2442P | 2442PSS4  | 22.00 x 40.00    | 559 x 1016 | 12    |
| 3020GP         | 3020P | 3020PSS4  | 28.00 x 18.00    | 711 x 457  | 12    |
| 3024GP         | 3024P | 3024PSS4  | 28.00 x 22.00    | 711 x 559  | 12    |
| 3030GP         | 3030P | 3030PSS4  | 28.00 x 28.00    | 711 x 711  | 12    |
| 3048GP         | 3048P | 3048PSS4  | 28.00 x 46.00    | 711 x 1168 | 12    |
| 3060GP         | 3060P | 3060PSS4  | 28.00 x 58.00    | 711 x 1473 | 12    |
| 3624GP         | 3624P | 3624PSS4  | 34.00 x 22.00    | 864 x 559  | 12    |
| 3630GP         | 3630P | 3630PSS4  | 34.00 x 28.00    | 864 x 711  | 12    |
| 3636GP         | 3636P | 3636PSS4  | 34.00 x 34.00    | 864 x 864  | 12    |
| 4230GP         | 4230P | 4230PSS4  | 40.00 x 28.00    | 1016 x 711 | 12    |
| 4236GP         | 4236P | 4236PSS4  | 40.00 x 34.00    | 1016 x 864 | 12    |
| 4824GP         | 4824P | 4824PSS4  | 46.00 x 22.00    | 1168 x 559 | 12    |
| 4836GP         | 4836P | 4836PSS4  | 46.00 x 34.00    | 1168 x 864 | 12    |
| 6036GP         | 6036P | 6036PSS4  | 58.00 x 34.00    | 1473 x 864 | 12    |

### NEMA Panel Adapters Subclass: TD0

NEMA panel adapters allow standard NEMA panels to be used in Premier series enclosures. Decreased height and width of NEMA panels increase space around panel for wire management. Kit includes four adapters and four .375-16 flanged hex nuts.

Finish: Zinc Plated


(Note: Cannot be used with enclosures 12" x 12" (305 mm x 305 mm) or smaller.)

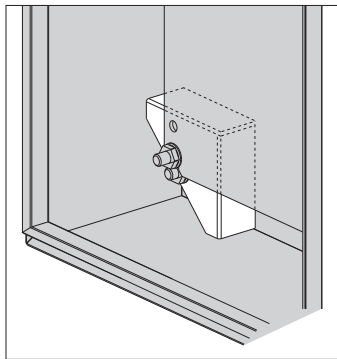

| Catalog Number | Qty. | For use with Premier Enclosures |
|----------------|------|---------------------------------|
| PCK4           | 4    | 30" x 30" or smaller            |

### Mounting Foot Kits Subclass: TD0

Mounting foot kits are available in stainless steel. Four feet and hardware are included.

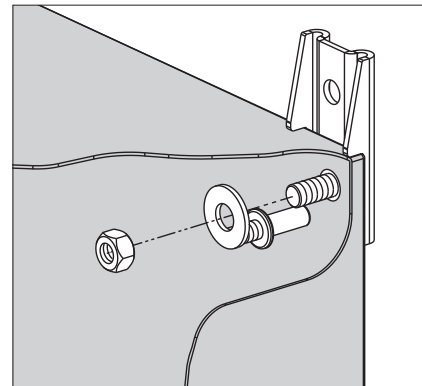

| Catalog Number | Qty. | Description       |
|----------------|------|-------------------|
| WMK            | 4    | Zinc Plated Steel |

Notes: Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

## Premier™ Series Accessories


Discount Schedule: C2

Subclass: TD0

### Swing-Out Panels

Swing-out panels offer a means for mounting user components and equipment near the front of an enclosure opening. Panel pivots from front of enclosure to allow easy access to internal equipment. Swing-out panels are 14 gauge with a white polyester powder finish and includes all hardware for mounting to front flange of enclosure.

**(Note:** Cannot be used in conjunction with depth adjustment brackets).

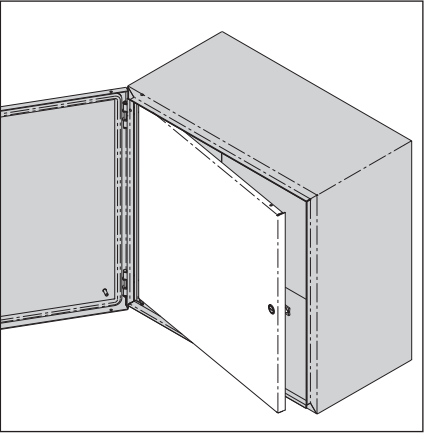


Note: Swing-out panel distance from panel face to inside of enclosure cover equals 1 1/4".

| Catalog Number | Panel Size    |           | For use with Premier Enclosures A x B |
|----------------|---------------|-----------|---------------------------------------|
|                | Height        | Width     |                                       |
| 1212SP         | 9.78 x 9.84   | 248 x 250 | 12"x12"                               |
| 1612SP         | 13.78 x 9.84  | 350 x 250 | 16"x12"                               |
| 1616SP         | 13.78 x 13.84 | 350 x 352 | 16"x16"                               |
| 1620SP         | 13.78 x 17.84 | 350 x 453 | 16"x20"                               |
| 2016SP         | 17.78 x 13.84 | 452 x 352 | 20"x16"                               |
| 2020SP         | 17.78 x 17.84 | 452 x 453 | 20"x20"                               |
| 2024SP         | 17.78 x 21.84 | 452 x 555 | 20"x24"                               |
| 2416SP         | 21.78 x 13.84 | 553 x 352 | 24"x16"                               |
| 2420SP         | 21.78 x 17.84 | 553 x 453 | 24"x20"                               |
| 2424SP         | 21.78 x 21.84 | 553 x 555 | 24"x24"                               |
| 3020SP         | 27.78 x 17.84 | 706 x 453 | 30"x20"                               |
| 3024SP         | 27.78 x 21.84 | 706 x 555 | 30"x24"                               |
| 3030SP         | 27.78 x 27.84 | 706 x 707 | 30"x30"                               |
| 3624SP         | 33.78 x 21.84 | 858 x 555 | 36"x24"                               |
| 3630SP         | 33.78 x 27.84 | 858 x 707 | 36"x30"                               |
| 3636SP         | 33.78 x 33.84 | 858 x 860 | 36"x36"                               |

### Dead Front Panels

Dead front kits offer a means for mounting user components and equipment near the front of an enclosure opening. Also, creates a barrier and controls access to the enclosure interior. Kit includes ANSI 61 gray panel and all hardware for mounting to enclosures.

**(Note:** Cannot be used in conjunction with depth adjustment brackets).

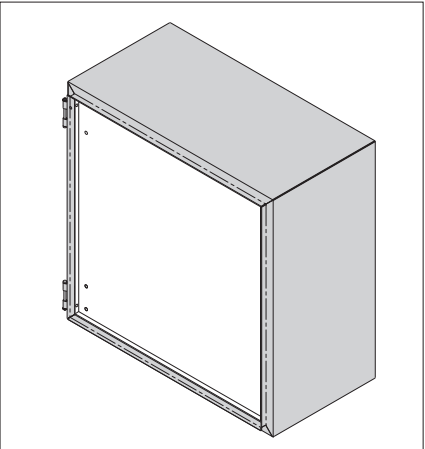


Note: Dead front panel distance from panel face to inside of enclosure cover equals 1 1/4".

| Catalog Number | For use with Premier Enclosures A x B |
|----------------|---------------------------------------|
|                |                                       |
| 1612DF         | 16"x12"                               |
| 2016DF         | 20"x16"                               |
| 2020DF         | 20"x20"                               |
| 2420DF         | 24"x20"                               |
| 2424DF         | 24"x24"                               |
| 3024DF         | 30"x24"                               |

### Mounting Channels

Mounting channels create a vertical or horizontal framework for DIN rail, flexible mounting straps, or other component attachment. Two channels provided for mounting on enclosure collar studs. Finish: Zinc Plated

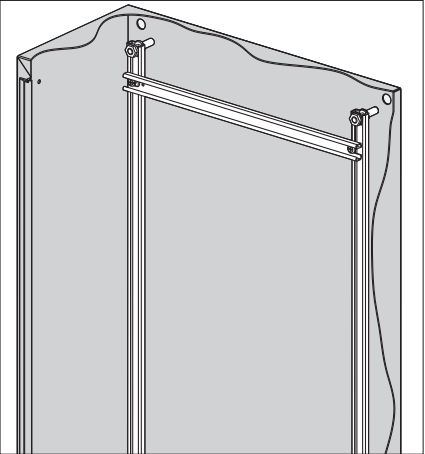

| Catalog Number | Qty. | For use with Premier Enclosures |
|----------------|------|---------------------------------|
|                |      |                                 |
| 16MC           | 2    | 16" height or width             |
| 20MC           | 2    | 20" height or width             |
| 24MC           | 2    | 24" height or width             |
| 30MC           | 2    | 30" height or width             |
| 36MC           | 2    | 36" height or width             |
| 42MC           | 2    | 42" height or width             |
| 48MC           | 2    | 48" height or width             |
| 60MC           | 2    | 60" height or width             |

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.



# Type 4 Panel Enclosures


## Premier™ Series Accessories

Discount Schedule: C2

Subclass: TD0

### DIN Rail Kits


DIN rail kits provide flexibility for mounting DIN type snap-on equipment. Three styles; TS32x15, slotted; TS35x7.5, slotted; TS35x15, slotted all attach to collar studs either horizontally or vertically. Three DIN rails, screws and channel nuts are provided. Finish: Yellow Zinc

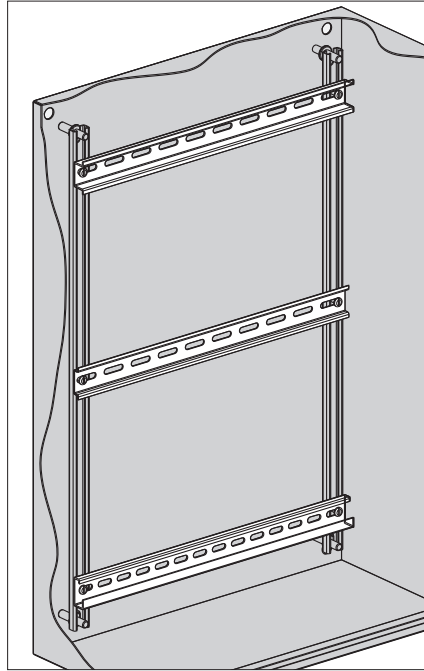

| Catalog Number | Description         | For use with Premier Enclosures |
|----------------|---------------------|---------------------------------|
| 12DR1P         | TS32 x 15, slotted  | 12" height or width             |
| 16DR1P         | TS32 x 15, slotted  | 16" height or width             |
| 20DR1P         | TS32 x 15, slotted  | 20" height or width             |
| 24DR1P         | TS32 x 15, slotted  | 24" height or width             |
| 12DR3P         | TS35 x 7.5, slotted | 12" height or width             |
| 16DR3P         | TS35 x 7.5, slotted | 16" height or width             |
| 20DR3P         | TS35 x 7.5, slotted | 20" height or width             |
| 24DR3P         | TS35 x 7.5, slotted | 24" height or width             |
| 12DRCP         | TS35 x 15, slotted  | 12" height or width             |
| 16DRCP         | TS35 x 15, slotted  | 16" height or width             |
| 20DRCP         | TS35 x 15, slotted  | 20" height or width             |
| 24DRCP         | TS35 x 15, slotted  | 24" height or width             |

### Flexible Mounting Straps

Flexible mounting straps offer a versatile, horizontal or vertical mounting method inside enclosure body. Two designs; 1-hole or 3-hole pattern increase mounting flexibility and attach to enclosure collar studs. Flexible mounting strap kit contains two straps and hardware. Finish: Zinc Plated

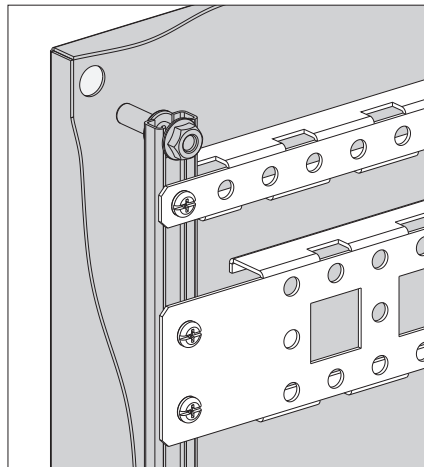

| Catalog Number | Description | Fits Premier Premier Enclosures |
|----------------|-------------|---------------------------------|
| 12GS1          | 1 hole      | 12" height or width             |
| 16GS1          | 1 hole      | 16" height or width             |
| 20GS1          | 1 hole      | 20" height or width             |
| 24GS1          | 1 hole      | 24" height or width             |
| 30GS1          | 1 hole      | 30" height or width             |
| 36GS3          | 3 hole      | 36" height or width             |
| 42GS3          | 3 hole      | 42" height or width             |
| 48GS3          | 3 hole      | 48" height or width             |
| 60GS3          | 3 hole      | 60" height or width             |

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.



## Premier™ Series Accessories


Discount Schedule: C2

Subclass: TD0

### Rack Mounting Angles

Relay rack angles are designed for mounting EIA 19" rack mount equipment inside 24" wide enclosures. Fabricated from 14 gauge steel and zinc plated. Rack angles are mounted to enclosure flange with hardware provided. Rack mount angles are untapped and require screws and cage nuts for equipment mounting (order separately).

Finish: Zinc Plated

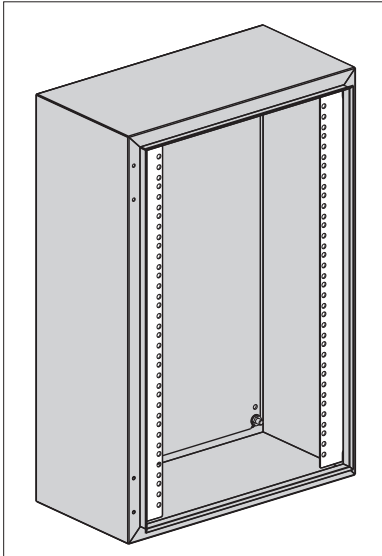


| Catalog Number | For use with Premier Enclosures | Mounting Units |
|----------------|---------------------------------|----------------|
| 10URMA         | 20" height                      | 10             |
| 12URMA         | 24" height                      | 12             |
| 16URMA         | 30" height                      | 16             |
| 19URMA         | 36" height                      | 19             |
| 26URMA         | 48" height                      | 26             |

Universal Spacing [5/8" (16mm), 5/8" (16mm), 1/2" (13mm)]

### Swing-Out Rack Frames

Swing-out rack frames allow mounting of EIA 19" rack mount equipment. Flexible pivoting framework provides access to back of equipment or other internal components. Designed for use with 24" wide Premier series enclosures. Mounting hardware included. Swing-out rack frame holes are untapped and require screws and cage nuts for equipment mounting (order separately).

**(Note:** Cannot be used in conjunction with depth adjustment brackets).  
Finish: ANSI Gray Polyester Powder

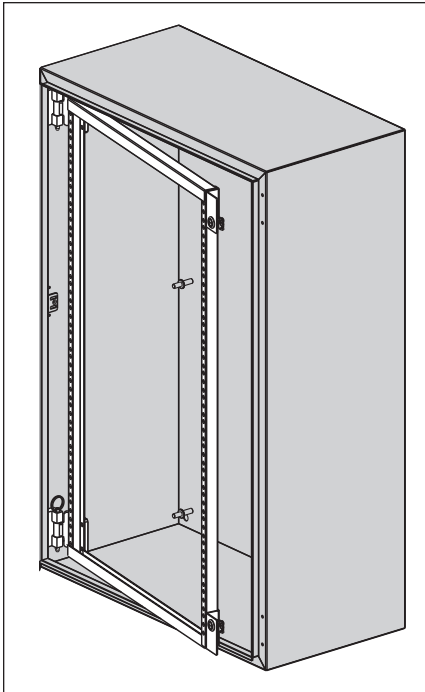

| Catalog Number | For use with Premier Enclosures | Mounting Units |
|----------------|---------------------------------|----------------|
| 2424SF         | 24" x 24"                       | 11             |
| 3024SF         | 30" x 24"                       | 15             |
| 3624SF         | 36" x 24"                       | 18             |

Universal Spacing [5/8" (16mm), 5/8" (16mm), 1/2" (13mm)]

Type 4 Panel Enclosures

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

# Type 4 Panel Enclosures

## Premier™ Series Accessories

Discount Schedule: C2

Subclass: TD0

### Handles

Padlocking, key-locking or non-locking handles are interchangeable with standard slotted quarter-turn flush latch on Premier series enclosures. Available keyed alike or keyed different, please specify when ordering.



| Catalog Number | Description                               | Latch Type   |
|----------------|---|--------------|
| WMHNL          | Wall-mount handle, non-locking            | Single point |
| WMHK-01        | Wall-mount handle, key-locking - keyed 01 | Single point |
| WMHK-02        | Wall-mount handle, key-locking - keyed 02 | Single point |
| WMHK-03        | Wall-mount handle, key-locking - keyed 03 | Single point |
| WMHK-04        | Wall-mount handle, key-locking - keyed 04 | Single point |
| WMHPTO         | Wall-mount handle, padlockable            | Single point |
| SD-KHB         | Black die cast zinc, key-locking handle   | 3-point      |

### Security Latch Inserts

Security latch inserts interchange with slotted quarter-turn flush latch and provide security and control access to interior of enclosure. Inserts include matching key.



7MTLK

| Catalog Number | Description                 | Latch Type   |
|----------------|-----------------------------|--------------|
| 7MTLK          | 7mm triangular latch insert | Single point |
| 7MSLK          | 7mm square latch insert     | Single point |
| 3MDBLK         | 3mm double bit latch insert | Single point |



7MSLK



3MDBLK

### Print Pockets

Print pockets provide a convenient place to store operation manuals, diagrams, or other documents inside the enclosure. Thermoplastic pockets are gray and have cut away areas for viewing contents. Pockets have adhesive backing for mounting inside on enclosure door.



| Catalog Number | Length x Width |
|----------------|----------------|
| 32170          | 6" x 6"        |
| 32171          | 10" x 10"      |

**Notes:** Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.