

# Straight Blade Receptacles TradeMaster® & Specification Grade GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC




Pass & Seymour

Straight Blade Receptacles


Features	
<ul style="list-style-type: none"> <li>■ SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>■ Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>■ Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>■ FSUL Listed (Federal Specification WC596).</li> <li>■ Trip indicator light (red LED).</li> <li>■ Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> <li>■ Two back wire holes per terminal.</li> <li>■ Ground screw has a back wire clamp for easy installation.</li> </ul>	<ul style="list-style-type: none"> <li>■ 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>■ Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>■ High-impact-resistant thermoplastic construction.</li> <li>■ Extra-long strap.</li> <li>■ Button colors match the device face.</li> <li>■ Dual-direction test and reset buttons.</li> <li>■ Class A rated GFCI.</li> <li>■ Supplied with matching TP26 nylon wall plate.</li> <li>■ Tri-drive screws.</li> <li>■ GFCIs with Auto-Ground assure a positive ground to metal box.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>■ Supply Voltage: 125VAC, 60 Hz</li> <li>■ Supply Voltage Range: 102-132 VAC</li> <li>■ Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>■ Trip Time: 0.025 sec., nominal per UL Standard</li> <li>■ 20 Amp feed-thru capacity</li> </ul>

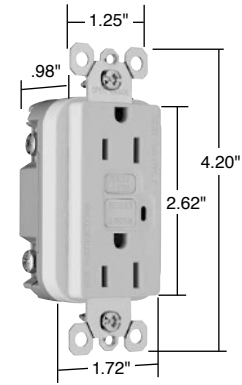

**1595W**

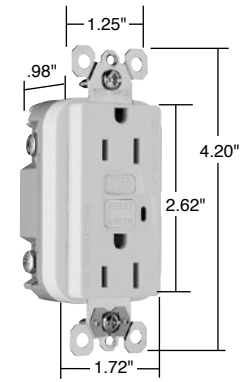

**1595SW**

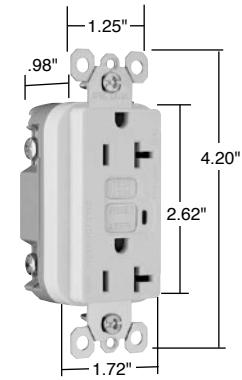

**2095W**



NEMA  
5-15R



NEMA  
5-20R

TradeMaster® & Spec Grade GFCI Receptacles

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					cUL943 UL943 C22.2 No. 144	cUL498 UL498 C22.2 No. 42	FSUL WC596
<b>TradeMaster®/Spec Grade 15 Amp Duplex GFCI</b>							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
<b>TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground</b>							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade 20 Amp Duplex GFCI</b>							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
<b>Specification Grade 20 Amp Duplex GFCI with Auto-Ground</b>							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

# Devices & Wall Plates Color Selection Chart



Pass & Seymour

## Devices & Plastic Wall Plate Colors

Ivory	Light Almond	White	Green		
Black	Blue	Brown	Gray	Orange	Red

See specific device and wall plate catalog charts for particular color availabilities.

## Metal Wall Plates

Aluminum	Brass (Brushed)	Polished Brass	Stainless Steel	Brushed Bronze	Chrome

**Metal Finish**

## Custom Metal Wall Plates Paint Finish Colors

Orange	Green	Gray	Yellow	Glossy Black	Brown	White
Primer	Red	Pink	Flat Black	Ivory	Light Almond	Blue

**Paint Color**

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.

# Technical Specifications TradeMaster® & Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC




Pass & Seymour

Technical Specifications


## Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595  
 Description: Straight Blade Duplex GFCI Receptacle  
 Type: 2 Pole, 3 Wire Grounding  
 Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face  
 3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
<input type="checkbox"/> 1595I	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1595W	White	15A 125VAC	5-15R
<input type="checkbox"/> 1595	Brown	15A 125VAC	5-15R
<input type="checkbox"/> 1595GRY	Gray	15A 125VAC	5-15R
<input type="checkbox"/> 1595BK	Black	15A 125VAC	5-15R
<input type="checkbox"/> 1595RED	Red	15A 125VAC	5-15R
<input type="checkbox"/> 1595LA	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 1595SI*	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1595SW*	White	15A 125VAC	5-15R
<input type="checkbox"/> 1595SLA*	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 2095I	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2095W	White	20A 125VAC	5-20R
<input type="checkbox"/> 2095	Brown	20A 125VAC	5-20R
<input type="checkbox"/> 2095GRY	Gray	20A 125VAC	5-20R
<input type="checkbox"/> 2095BK	Black	20A 125VAC	5-20R
<input type="checkbox"/> 2095RED	Red	20A 125VAC	5-20R
<input type="checkbox"/> 2095LA	Light Almond	20A 125VAC	5-20R
<input type="checkbox"/> 2095SI*	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2095SW*	White	20A 125VAC	5-20R
<input type="checkbox"/> 2095SLA*	Light Almond	20A 125VAC	5-20R

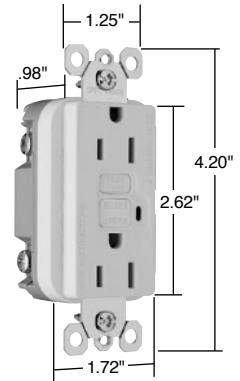

Dimensions for  
15 & 20 Amp

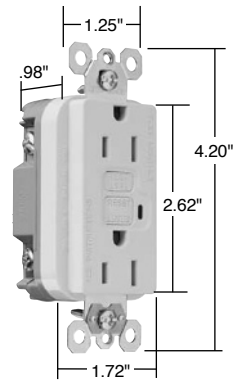

Dimensions for  
15 & 20 Amp  
With Auto-Ground

## Performance

### Electrical

Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC

### Mechanical

Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device



### Environmental

Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

### Materials

Face	Nylon	Terminal Screws	Steel #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon
		Auto-Ground Clip*	Brass Alloy C260

\*GFCIs with Auto-Ground feature.



Project

Location/Type

TradeMaster® & Spec Grade GFCIs

# Straight Blade Receptacles TradeMaster® & Specification Grade GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC




Pass & Seymour

Straight Blade Receptacles


Features	
<ul style="list-style-type: none"> <li>■ SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>■ Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>■ Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>■ FSUL Listed (Federal Specification WC596).</li> <li>■ Trip indicator light (red LED).</li> <li>■ Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> <li>■ Two back wire holes per terminal.</li> <li>■ Ground screw has a back wire clamp for easy installation.</li> </ul>	<ul style="list-style-type: none"> <li>■ 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>■ Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>■ High-impact-resistant thermoplastic construction.</li> <li>■ Extra-long strap.</li> <li>■ Button colors match the device face.</li> <li>■ Dual-direction test and reset buttons.</li> <li>■ Class A rated GFCI.</li> <li>■ Supplied with matching TP26 nylon wall plate.</li> <li>■ Tri-drive screws.</li> <li>■ GFCIs with Auto-Ground assure a positive ground to metal box.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>■ Supply Voltage: 125VAC, 60 Hz</li> <li>■ Supply Voltage Range: 102-132 VAC</li> <li>■ Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>■ Trip Time: 0.025 sec., nominal per UL Standard</li> <li>■ 20 Amp feed-thru capacity</li> </ul>

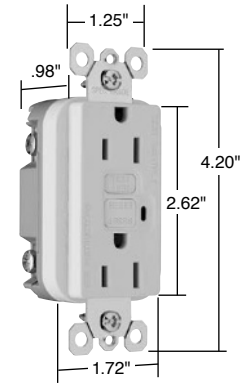

**1595W**

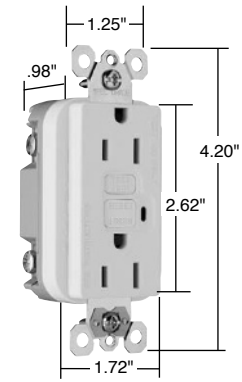

**1595SW**

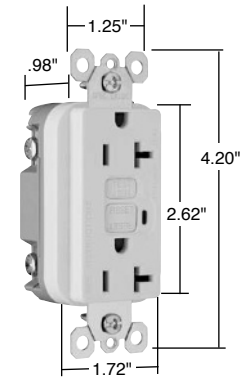

**2095W**



NEMA  
5-15R



NEMA  
5-20R

TradeMaster® & Spec Grade GFCI Receptacles

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>TradeMaster®/Spec Grade 15 Amp Duplex GFCI</b>							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
<b>TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground</b>							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade 20 Amp Duplex GFCI</b>							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
<b>Specification Grade 20 Amp Duplex GFCI with Auto-Ground</b>							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•


All devices listed on this page conform to NEMA WD-1 and WD-6.

# Devices & Wall Plates Color Selection Chart




Pass & Seymour

## Devices & Plastic Wall Plate Colors

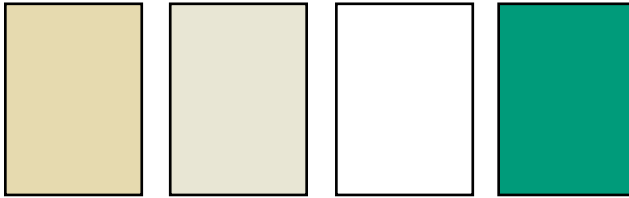


Ivory      Light Almond      White      Green

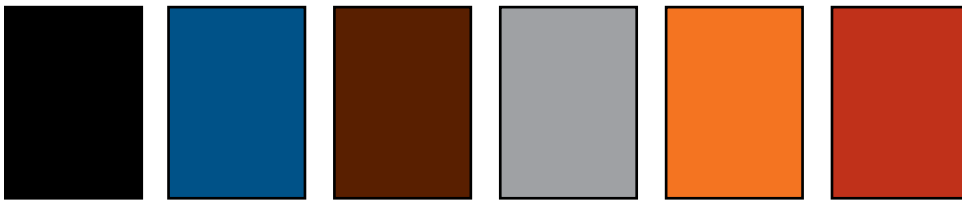

Black      Blue      Brown      Gray      Orange      Red


See specific device and wall plate catalog charts for particular color availabilities.

## Metal Wall Plates

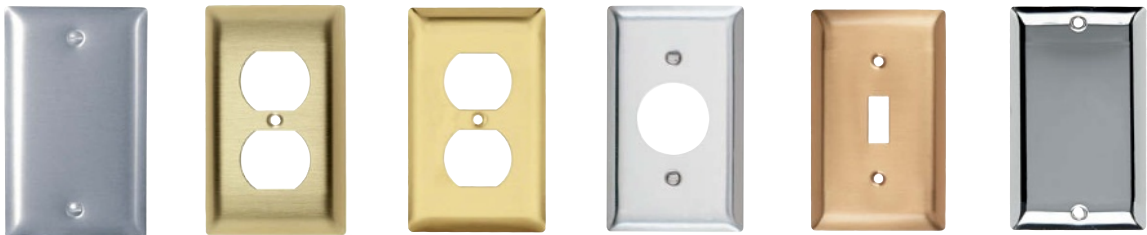


**Metal Finish**      Aluminum      Brass (Brushed)      Polished Brass      Stainless Steel      Brushed Bronze      Chrome

## Custom Metal Wall Plates Paint Finish Colors

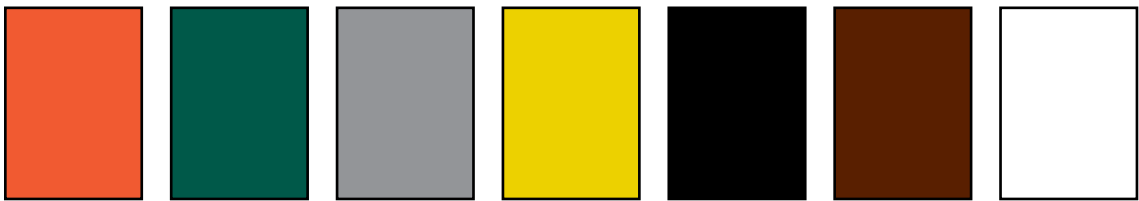

**Paint Color**      Orange      Green      Gray      Yellow      Glossy Black      Brown      White

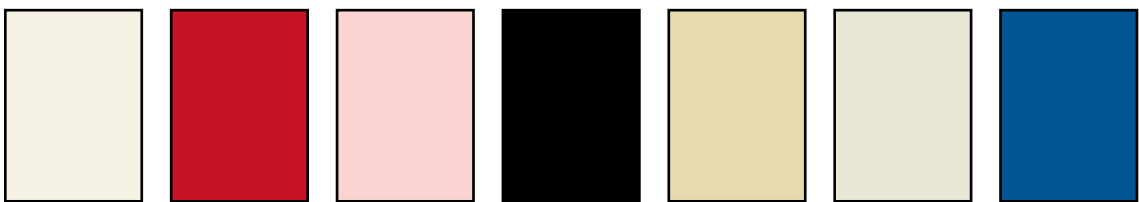

**Paint Color**      Primer      Red      Pink      Flat Black      Ivory      Light Almond      Blue

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.

# Technical Specifications TradeMaster® & Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC




Pass & Seymour

Technical Specifications


## Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595  
 Description: Straight Blade Duplex GFCI Receptacle  
 Type: 2 Pole, 3 Wire Grounding  
 Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face  
 3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
<input type="checkbox"/> 1595I	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1595W	White	15A 125VAC	5-15R
<input type="checkbox"/> 1595	Brown	15A 125VAC	5-15R
<input type="checkbox"/> 1595GRY	Gray	15A 125VAC	5-15R
<input type="checkbox"/> 1595BK	Black	15A 125VAC	5-15R
<input type="checkbox"/> 1595RED	Red	15A 125VAC	5-15R
<input type="checkbox"/> 1595LA	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 1595SI*	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1595SW*	White	15A 125VAC	5-15R
<input type="checkbox"/> 1595SLA*	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 2095I	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2095W	White	20A 125VAC	5-20R
<input type="checkbox"/> 2095	Brown	20A 125VAC	5-20R
<input type="checkbox"/> 2095GRY	Gray	20A 125VAC	5-20R
<input type="checkbox"/> 2095BK	Black	20A 125VAC	5-20R
<input type="checkbox"/> 2095RED	Red	20A 125VAC	5-20R
<input type="checkbox"/> 2095LA	Light Almond	20A 125VAC	5-20R
<input type="checkbox"/> 2095SI*	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2095SW*	White	20A 125VAC	5-20R
<input type="checkbox"/> 2095SLA*	Light Almond	20A 125VAC	5-20R

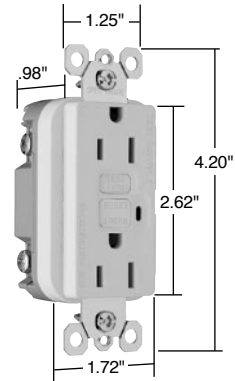

Dimensions for  
15 & 20 Amp

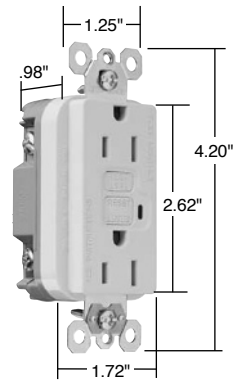

Dimensions for  
15 & 20 Amp  
With Auto-Ground

## Performance

### Electrical

Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC

### Mechanical

Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device



### Environmental

Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

### Materials

Face	Nylon	Terminal Screws	Steel #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon
		Auto-Ground Clip*	Brass Alloy C260

\*GFCIs with Auto-Ground feature.



Project

Location/Type

TradeMaster® & Spec Grade GFCIs