

## SPECIFICATION SHEET

### PHOTOCONTROL ACCESSORIES FOR TURN-LOCK CONTROLS

#### APPLICATIONS MOUNTING BRACKET

Utility mounting bracket for 1/2" threaded conduit photocontrols.

#### REPLACEMENT CAPS

5500 replaces photocontrol to change light fixture to always ON. 5500-OC replaces photocontrol to change light fixture to always OFF. Durable materials and gasket provide longevity and weatherproof protection.

#### RECEPTACLE 2223

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, gasket and two mounting screws.

#### RECEPTACLE 2224

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, mounting bracket and one mounting screw.

#### RECEPTACLE 2421

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, plastic housing, lock nut (with 1/2" NPT) and a mounting bracket.

#### MOUNTING BRACKET

DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**73866** 62020 Mounting Bracket

#### REPLACEMENT CAPS



DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------




**5500** 61130 Shorting cap  
480VAC max  
1800W Tungsten  
1800VA Ballast



**5500-OC** 61132 Open cap  
480VAC max  
(Black housing)

#### RECEPTACLE


DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**2223** 61025 Receptacle with gasket

#### RECEPTACLE

DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**2224** 61026 Receptacle and mounting bracket


#### RECEPTACLE

DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**2421** 61021 Receptacle with plastic housing and bracket

NSi offers many splicing options to complete the pole installation. See the catalog splicing section pages 211- 232.

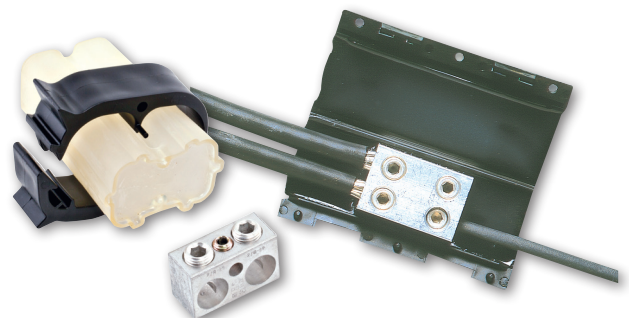

## SPECIFICATION SHEET

### PHOTOCONTROL ACCESSORIES FOR TURN-LOCK CONTROLS

#### APPLICATIONS MOUNTING BRACKET

Utility mounting bracket for 1/2" threaded conduit photocontrols.

#### REPLACEMENT CAPS

5500 replaces photocontrol to change light fixture to always ON. 5500-OC replaces photocontrol to change light fixture to always OFF. Durable materials and gasket provide longevity and weatherproof protection.

#### RECEPTACLE 2223

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, gasket and two mounting screws.

#### RECEPTACLE 2224

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, mounting bracket and one mounting screw.

#### RECEPTACLE 2421

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, plastic housing, lock nut (with 1/2" NPT) and a mounting bracket.

#### MOUNTING BRACKET

DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**73866** 62020 Mounting Bracket

#### REPLACEMENT CAPS



DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------




**5500** 61130 Shorting cap  
480VAC max  
1800W Tungsten  
1800VA Ballast



**5500-OC** 61132 Open cap  
480VAC max  
(Black housing)

#### RECEPTACLE


DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**2223** 61025 Receptacle with gasket

#### RECEPTACLE

DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**2224** 61026 Receptacle and mounting bracket

#### RECEPTACLE

DEVICE	CAT. NO.	UPC CODE	DESCRIPTION
--------	----------	----------	-------------



**2421** 61021 Receptacle with plastic housing and bracket

NSi offers many splicing options to complete the pole installation. See the catalog splicing section pages 211- 232.

