



Commercial Combination Devices

Single Pole Switch with Second Device

Commercial Combination Devices

FEATURES

- Grounding terminal screw standard.
- Receptacles have triple wipe line contacts and double wipe ground contacts to insure long-term plug retention.
- Thick steel mounting strap zinc-plated for corrosion resistance.
- Break-off provision for wiring both devices on same circuit or on separate circuits.
- Terminal screws backed out – ready for wiring.
- Side wire terminals accept up to #10 solid or stranded wire.
- Pilot light may be wired to indicate power “on” or power “off”.
- Combination switch with receptacle Catalog No. 274 and 291 feature neon pilot light standard.
- Combination slot/Phillips head mounting and terminal screws ease installation (slot/Robertson screws in Canada where available).

Single Pole Switch with Receptacle – Side Wire




| Switch Rating | Receptacle Rating | Second Device Description | Color | Catalog No. |
|---------------|--------------------------|---------------------------|--------------|-------------|
| 15A 120V/AC | 15A 125V/AC NEMA 5-15 | 2P3W Grounding Receptacle | Almond | 274A |
| | | | Brown | 274B |
| | | | Ivory | 274V |
| | | | Light Almond | 274LA |
| | | | White | 274W |
| 20A 120V/AC | 20A 125V/AC NEMA 5-20 | 2P3W Grounding Receptacle | Brown | 291B |
| | | | Ivory | 291V |
| | | | White | 291W |

Single Pole Switch with Additional Switch – Side Wire

| Switch Rating | Second Device Description | Color | Catalog No. |
|---------------|---------------------------|--------------|-------------|
| 15A 120V/AC | Single Pole Switch | Almond | 271A |
| | | Brown | 271B |
| | | Ivory | 271V |
| | | Light Almond | 271LA |
| | | White | 271W |
| 15A 120V/AC | 3-Way Switch | Almond | 275A |
| | | Brown | 275B |
| | | Ivory | 275V |
| | | Light Almond | 275LA |
| White | 275W | | |

Single Pole Switch with Pilot Light – Side Wire

| Switch Rating | Pilot Light Rating | Color | Catalog No. |
|---------------|--------------------|--------------|-------------|
| 15A 120V/AC | 1/25W 120V/AC | Almond | 277A |
| | | Brown | 277B |
| | | Ivory | 277V |
| | | Light Almond | 277LA |
| | | White | 277W |

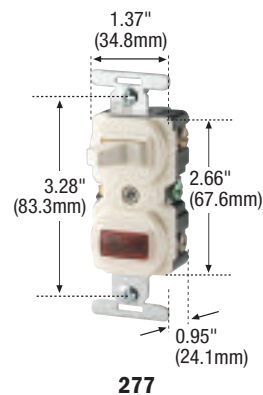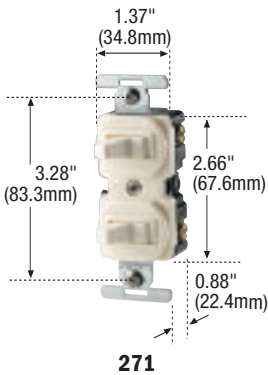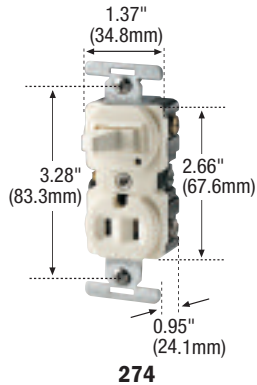

E-13 Switches

TESTING & CODE COMPLIANCE

· UL 20 Listed, (file no. E18704)
 · For Switches: CSA (file no. 10016 (6241-05))
 For Switches w/Recep.: CSA (file no. 6914 (6233-04)).
 Meets all CSA requirements, C22.2 no. 111 for switches, C22.2 no. 42 for receptacles.

MATERIAL CHARACTERISTICS

Temperature Rating: -40°C to 65°C.



5-15R



5-20R



Commercial Combination Devices

Single Pole Switch with Second Device

Commercial Combination Devices

FEATURES

- Grounding terminal screw standard.
- Receptacles have triple wipe line contacts and double wipe ground contacts to insure long-term plug retention.
- Thick steel mounting strap zinc-plated for corrosion resistance.
- Break-off provision for wiring both devices on same circuit or on separate circuits.
- Terminal screws backed out – ready for wiring.
- Side wire terminals accept up to #10 solid or stranded wire.
- Pilot light may be wired to indicate power “on” or power “off”.
- Combination switch with receptacle Catalog No. 274 and 291 feature neon pilot light standard.
- Combination slot/Phillips head mounting and terminal screws ease installation (slot/Robertson screws in Canada where available).

Single Pole Switch with Receptacle – Side Wire




| Switch Rating | Receptacle Rating | Second Device Description | Color | Catalog No. |
|---------------|--------------------------|---------------------------|--------------|-------------|
| 15A 120V/AC | 15A 125V/AC NEMA 5-15 | 2P3W Grounding Receptacle | Almond | 274A |
| | | | Brown | 274B |
| | | | Ivory | 274V |
| | | | Light Almond | 274LA |
| | | | White | 274W |
| 20A 120V/AC | 20A 125V/AC NEMA 5-20 | 2P3W Grounding Receptacle | Brown | 291B |
| | | | Ivory | 291V |
| | | | White | 291W |

Single Pole Switch with Additional Switch – Side Wire

| Switch Rating | Second Device Description | Color | Catalog No. |
|---------------|---------------------------|--------------|-------------|
| 15A 120V/AC | Single Pole Switch | Almond | 271A |
| | | Brown | 271B |
| | | Ivory | 271V |
| | | Light Almond | 271LA |
| | | White | 271W |
| 15A 120V/AC | 3-Way Switch | Almond | 275A |
| | | Brown | 275B |
| | | Ivory | 275V |
| | | Light Almond | 275LA |
| White | 275W | | |

Single Pole Switch with Pilot Light – Side Wire

| Switch Rating | Pilot Light Rating | Color | Catalog No. |
|---------------|--------------------|--------------|-------------|
| 15A 120V/AC | 1/25W 120V/AC | Almond | 277A |
| | | Brown | 277B |
| | | Ivory | 277V |
| | | Light Almond | 277LA |
| | | White | 277W |

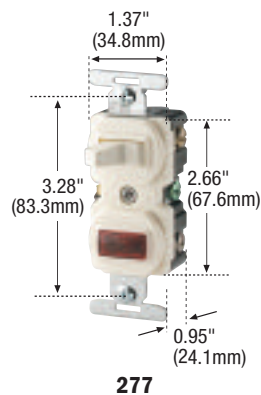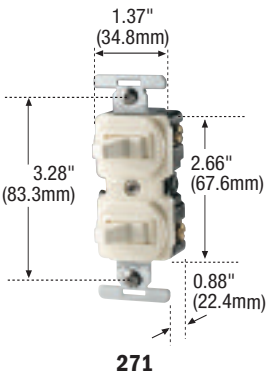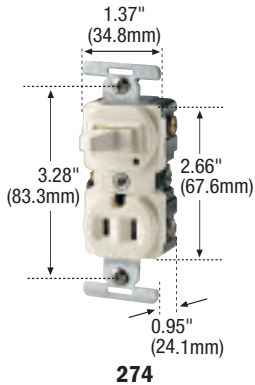

E-13 Switches

TESTING & CODE COMPLIANCE

· UL 20 Listed, (file no. E18704)
 · For Switches: CSA (file no. 10016 (6241-05))
 For Switches w/Recep.: CSA (file no. 6914 (6233-04)).
 Meets all CSA requirements, C22.2 no. 111 for switches, C22.2 no. 42 for receptacles.

MATERIAL CHARACTERISTICS

Temperature Rating: -40°C to 65°C.



5-15R



5-20R