

## Industrial Lockout/Tagout Kit



- An industrial selection of lockout/tagout devices
- Polypropylene plastic tool box resists oil and chemicals

Description		Cat. No.
Industrial Lockout/Tagout Kit		<b>44-974</b>
<b>Kit 44-974 Includes:</b>	<b>Qty.</b>	<b>Cat. No.</b>
Hinged Single-Pole Breaker Lockouts	3	<b>44-810</b>
Universal 277V Breaker/Single Pole Lockouts	2	<b>44-809</b>
480/600V Breaker Lockout	1	<b>44-807</b>
Wall Switch Lockout	1	<b>44-789</b>
110V Small Plug Lockout	1	<b>44-818</b>
Ball Valve Lockout	1	<b>44-820</b>
1 in. Safety Lockout Hasps	2	<b>44-800</b>
Red Labeled Lockout	1	<b>44-791</b>
220/550V Plug Lockout	1	<b>44-819</b>
Lockout Tags – Do Not Operate (striped)	10	<b>44-849</b>
Fuse Blockout	1	<b>44-815</b>
Fuse Blockout	1	<b>44-816</b>
Gate Valve Lockout	1	<b>44-824</b>
Cleat for 277V Breaker Lockout	1	<b>44-785</b>
Cleat for 480/600V Breaker Lockout	1	<b>44-786</b>
Red Lockout Padlocks	4	<b>44-916</b>
Universal Multi-Pole Breaker Lockouts	2	<b>44-783</b>
Tool Box*	1	<b>IA-3241</b>

Quantities listed in kit description are for individual pieces, not carded packages.

\*Tool Box color may vary.

## Job Site Lockout/Tagout Kit



- Perfect kit for an individual worker; padlocks are keyed-alike for added worker convenience
- Excellent selection of lockout/tagout devices, tags and keyed-alike padlocks for most applications

Description		Cat. No.
Job Site Lockout/Tagout Kit		<b>44-979</b>
<b>Kit 44-979 Includes:</b>	<b>Qty.</b>	<b>Cat. No.</b>
Circuit Breaker Lockouts - tall and wide toggles	2	<b>44-956</b>
Circuit Breaker Lockouts - standard single and double toggles	3	<b>44-957</b>
Circuit Breaker Lockout Padlock	1	—
Red Lockout Padlocks	3	<b>44-916**</b>
1 in. Safety Lockout Hasp	1	<b>44-800</b>
Red Labeled Lockout	1	<b>44-791*</b>
Universal Wall Switch Lockout	1	<b>44-772</b>
Lockout Tags - Do Not Operate (striped)	12	<b>44-833*</b>
Tool Box	1	<b>IA-3241*</b>

\*Masterlock equivalent.

\*\*Reference part number is keyed-different, keyed-alike and master-keyed products can be special ordered by contacting IDEAL Customer Service.

## Group Lock Box



- Helps ensure maximum security for complex work team situations
- Allows up to 13 individuals to personally lock the closed box
- Heavy-duty steel construction resists unauthorized entry and job-site abuse
- Compact 8-3/4 in. x 3-1/2 in. x 6 in. design

Description	Cat. No.
Group Lock Box	<b>44-804</b>

## Lock Stations

- Resilient polycarbonate material provides twice the heat resistance and quadruple the impact strength of typical stations
- Lockable cover prevents loss of valuable safety products and innovative hinge holds cover open for easy product selection



Description	Cat. No.
Four-Lock Station Kit four red Safety Padlocks (44-916), 12 Heavy-Duty Lockout Tags and two 1 in. Safety Lockout Hasps (44-800)	<b>44-778*</b>
Ten-Lock Station Kit includes Ten-Lock Station Board (44-805), ten red Safety Padlocks (44-916), 24 Heavy-Duty Lockout Tags and two 1 in. Safety Lockout Hasps (44-800)	<b>44-806</b>

\*Not shown.

## Lockout/Tagout Training Programs and Compliance Manuals

- Kinds of energy lockout/tagout can control
- Lockout/tagout basics
- OSHA's LO/TO Standard
- The six steps to lockout/tagout
- Removing lockout/tagout devices after a job is complete
- Length: 15:00 minutes



Description	Cat. No.
Lockout/Tagout Training DVD	<b>44-943</b>

## Industrial Lockout/Tagout Station



- Large Lockout/Tagout Station can be wall mounted or easily transported
- All metal, lockable cabinets come with two adjustable shelves (extra shelves available)
- Lockout safety tips are conveniently located inside of door for frequent reminders of proper lockout procedures

Description	Cat. No.	
Industrial Lockout/Tagout Station – 16 in. H x 14 in. W x 6 in. D	<b>44-975</b>	
<b>Kit 44-975 Includes:</b>	<b>Qty.</b>	<b>Cat. No.</b>
Hinged Single-Pole Breaker Lockouts	2	<b>44-810</b>
Universal Single-Pole Breaker Lockouts	2	<b>44-809</b>
Cleat for Universal Single-Pole Lockouts	2	<b>44-785</b>
Universal Multi-Pole Breaker Lockouts	2	<b>44-783</b>
480/600V Breaker Lockout	1	<b>44-807</b>
Cleat for 480/600V Breaker Lockout	1	<b>44-786</b>
Wall Switch Lockout	1	<b>44-789</b>
1 in. Safety Lockout Hasps	3	<b>44-800</b>
Red Safety Padlocks	4	<b>44-916</b>
100V Small Plug Lockout	1	<b>44-818</b>
220/550V Plug Lockout	1	<b>44-819</b>
Lockout Tags – Do Not Operate	10	<b>44-849</b>
Gate Valve Lockout - 1 in. to 2-1/2 in.	1	<b>44-824</b>
Gate Valve Lockout - 2-1/2 in. to 5 in.	1	<b>44-825</b>
Ball Valve Lockout	1	<b>44-820</b>
Pneumatic Lockout	1	<b>44-774</b>
Description	Qty.	Cat. No.
Extra Shelf	1	<b>IA-4990</b>

**Please contact your IDEAL Sales Representative should you need any Lockout/Tagout Training!**

## Wall Switch Lockouts


- Our patent pending universal Wall Switch Lockout locks out both toggle and decora wall switches
- Universal design assures switch is locked on or off. Hinges open for unobstructed normal switch operation
- Standard wall switch lockout fits most wall-mounted single or three-way electrical switches



Description	Qty.	Cat. No.
Universal Wall Switch 	1	44-772
Standard Wall Switch (not shown)	1	44-789

## Adjustable Cable Lockout

- Infinitely adjustable safety hasp and cable
- Ideal for multiple circuit breaker panels and side-by-side gate valve lockouts
- Feed the cable end through the points to be locked out, then back through the lockout body. Cinch it tight to remove any slack with the patented locking feature.
- Tough, flexible multi-stranded 6 ft. 1/4 in. dia. steel cable is insulated with a clear vinyl coating
- Tough, lightweight, dielectric thermoplastic body withstands chemicals; performs effectively in extreme conditions
- Up to four workers can apply their personal safety locks
- Complete with high-visibility, re-usable, write-on safety labels (English, French & Spanish). Identify the responsible person, then erase for the next job.



Description	Cat. No.
Adjustable Cable Lockout	44-808

## Gate Valve Lockouts

- Unique patent pending rotating design allows for easier installation in confined space applications
- Each size rotates into itself and nests within the next larger size to save space in storage
- Up to four workers can apply their personal safety locks
- Complete with high-visibility permanent safety labels (English, French & Spanish) that can be written on to identify the responsible person, then erased for the next job
- Tough, lightweight, dielectric thermoplastic bodies withstand chemicals and perform effectively in extreme conditions, temperature range: -50°F (-46°C) to +350°F (177°C)



Valve Size	Qty.	Cat. No.
1 in. to 3 in.	1	44-824
2 in. to 5 in.	1	44-825
Set of five sizes (1 in. to 13 in.)	1	44-817



## Cable Lockout


- 44-829 Unique hasp lockout device accepts up to six 9/32 in. padlocks and comes with a 6 ft. plastic-coated steel cable



Description	Cat. No.
Cable Lockout, 6 ft. cable	44-829

## Ball Valve Lockout Devices

- Best available method for locking out ball valves
- Patented design fits most major brand ball valves
- Designed to lock in off position only
- Complies with OSHA lockout standard

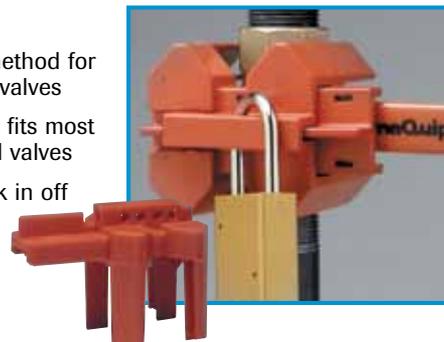

Valve Size	Max. Shackle Length	Material	Cat. No.
1/2 to 1-1/4 in.	—	Polypropylene	44-846
1-1/4 to 3	—	Polypropylene	44-847
1/4 to 1 (not shown)	9/32 in.	Nylon	44-820
1-1/4 to 3 (not shown)	9/32 in.	Heavy Steel	44-821

## Steel Padlocks

- Rustproofed, steel case with nickel-plated shackle withstands abuse and environmental hazards
- Includes two keys
- 1-1/2 in. wide lock with 9/32 in. shackle diameter
- Keyed-alike and Master-Keyed locks available by special order



Bumper Color	3/4 In. Shackle Clearance Cat. No.	2 In. Shackle Clearance Cat. No.
Blue	<b>44-900</b>	<b>44-901</b>
Red	<b>44-906</b>	<b>44-907</b>

## Lock Labels

- Easy identification of employees' locks
- Write-on, vinyl labels with peel-off adhesive backing
- Polyester over laminate protects label



Description	Qty.	Cat. No.
Lock Labels	8 labels	<b>44-898</b>

## Safety Lockout Padlocks w/Key Retention

- Dedicated safety lockout device reduces confusion with other locks
- Complies with OSHA's "1-key, 1-lock"
- Non-conductive, lightweight body
- Key retention ensures keys do not get lost while not in use and that padlocks are not left untouched
- 1-1/2 in. shackle clearance
- 1-1/2 in. wide lock with 1/4 in. shackle
- Four colors for easy identification
- Keyed-alike, Master-Keyed, 2nd key, additional colors and engraving available by special order

Bumper Color	Cat. No.
Blue	<b>44-912</b>
Black	<b>44-914</b>
Red	<b>44-916</b>
Yellow	<b>44-918</b>



## Flash Protection Labels and Signs

**National Electric Code 110.16 Flash Protection:** *Switchboards, panel boards, industrial control panels and motor control centers*, in other than dwelling occupancies, that are likely to require examination, adjustment, servicing or maintenance while energized, shall be field marked to warn qualified persons of potential electric arc flash hazards. The marking shall be located so as to be clearly visible to qualified persons before examination, adjustment, servicing or maintenance of the equipment.

Description	Type	Size	Qty./Bag	Cat. No.
NEC Arc Flash, Warning 	Self-Sticking Polyester	3-1/2 in. x 5 in.	5	<b>44-892</b>
			100	<b>44-892BK</b>
NEC Arc Flash, Danger 	Self-Sticking Polyester	5 in. x 7 in.	5	<b>44-893</b>
				<b>44-894</b>
NEC Arc Flash, Warning 	Self-Sticking Polyester	4 in. x 6 in.	5	<b>44-895</b>
NEC Arc Flash, Warning 	Self-Sticking Polyester	7 in. x 10 in.	1	<b>44-896</b>

## Python™ Adjustable Locking Cable

Python™ Adjustable Locking Cable secures anything within its grasp. The only locking cable that is right length for your application. This patented product holds flexible steel cable tight at any position



- Infinite Locking Positions – Patented lock holds cable tight from 1 ft. (30cm) to 6 ft. (1.8m)
- Application Flexibility – Interchangeable cables
- Keyed Alike Convenience – Rekeyable cylinder
- Cut Resistance – 3/8 in. (10mm), 100% steel braided cable
- Weather Tough – Rust resistant aluminum lock body
- Scratch Resistant – Vinyl cable sleeve and lock body bumper

Other Applications: Bikes, lawn furniture, lawn mowers, job sites, canoes, boats, skis, snowboards, generators, pickup truck cargo, spare tire locks and much more.

Description	Cat. No.
Master Lock Python™ Kit with 6 ft. Cable-keyed different	<b>44-990</b>
Master Lock Python™ Kit with 6 ft. Cable-keyed alike*	<b>44-991</b>
12 ft. (3.7m) x 3/8 in. (10mm) Cable for Python™ Lock*	<b>44-992</b>

\*Special order thru Customer Service.

## Voltage & Conduit Markers

- Identify junction boxes, switches, circuit breakers, raceways, pipe and fuse boxes
- Non-conductive for user safety
- High-adhesion properties with easy removability
- Vinyl-impregnated cloth construction for long-lasting durability
- Resist abrasion, moisture, dirt and oil
- Non-smear, black legend on bright orange background for high visibility



**Large:**  
2-1/4 in. x 9 in. each w/1-3/4 in. type



**Medium:**  
1-1/8 in. x 4-1/2 in. each w/3/4 in. type



**Small:**  
2-1/4 in. x 1/2 in. each w/5/16 in. type

Legend	Large Cat. No. 1/card	Medium Cat. No. 4/card	Small Cat. No. 18/card
120/208V	<b>44-295</b>	<b>44-296</b>	—
277/480V	<b>44-298</b>	<b>44-299</b>	—
120V	—	<b>44-353</b>	—
208V	—	<b>44-355</b>	—
240V	—	<b>44-358</b>	—
277V	—	—	<b>44-410</b>
480V	<b>44-314</b>	<b>44-364</b>	—
DANGER	<b>44-289</b>	—	—
HIGH VOLTAGE	<b>44-292</b>	—	—

### Specifications:

Temperature Range: -40°F to 180°F (-40°C to 82°C)  
Adhesion: 45 oz./in. width ultimate

## Heavy-Duty Lockout Tags

- High-visibility lettering
- Laminated plastic tags have non-fade legends, resist corrosive and harsh environmental conditions grommet
- Vinyl tags are silk screened with a 7/8 in. metal grommet; fastener included
- Exceeds OSHA's 50-lb. pullout requirement
- Matte finish for easy writing surface

Legend	Type	Qty.	Cat. No.
Do Not Operate	Heavy-Duty Laminated	5/card	<b>44-830</b>
	Heavy-Duty Laminated	100/box	<b>44-1830</b>
	Economy Vinyl	25/bag	<b>44-848</b>
Do Not Operate - Electricians at Work	Heavy-Duty Laminated	5/card	<b>44-832</b>
	Economy Vinyl	25/bag	<b>44-843</b>
Do Not Operate - (red striped background)	Heavy-Duty Laminated	5/card	<b>44-833</b>
	Heavy-Duty Laminated	100/box	<b>44-1833</b>
	Economy Vinyl	25/bag	<b>44-849</b>

## Lockout Signs

- Resistant to both chemicals and abrasion – protected graphics for indoor and outdoor use

Legend	Material	Size (In.)	Cat. No.
OSHA Regulation 36 in. clearance	Self-sticking polyester	3-1/2 x 10	<b>44-877</b>
OSHA Regulation (Bilingual) 36 in. clearance	Self-sticking polyester	7 x 10	<b>44-878</b>
Danger - Breakers Locked Out	Magnetic	5 x 7	<b>44-890</b>

## Safety Signs

- Resistant to both chemicals & abrasion – protected graphics for indoor & outdoor use



## Bilingual Lockout Tags

- Spanish/English tags provide extra safety and information in bilingual situations
- High-visibility lettering
- Laminated vinyl tags with non-fade legends resist corrosive and harsh environmental conditions
- Write-on tag with 7/8 in. grommet can be padlocked to device to help prevent unauthorized removal

Legend	Qty.	Cat. No.
Do Not Operate (striped)	5	<b>44-841</b>

Legend	Material	Size (In.)	Cat. No.
Danger – High Voltage	Fiberglass	10 x 14	<b>44-862</b>
Danger – High Voltage	Self-Sticking Polyester	7 x 10	<b>44-863</b>
Danger – High Voltage – Keep Out	Fiberglass	10 x 14	<b>44-880</b>
Danger – High Voltage – Keep Out	Self-Sticking Polyester	7 x 10	<b>44-881</b>
Danger – High Voltage – Spanish	Self-Sticking Polyester	7 x 10	<b>44-865</b>