

SNAP²IT[®] MC Cable Connectors

with Locknut • Easy Snap-in Cable Insertion • NO TOOLS!



1/2" KO
3838A
installed in
light fixture
with locknut


Easy, snap
onto cable
installation

Snap on
side

Threaded
side

4040A
1/2" KO

Snap
onto cable
**SAVES 12
SECONDS
per connector**

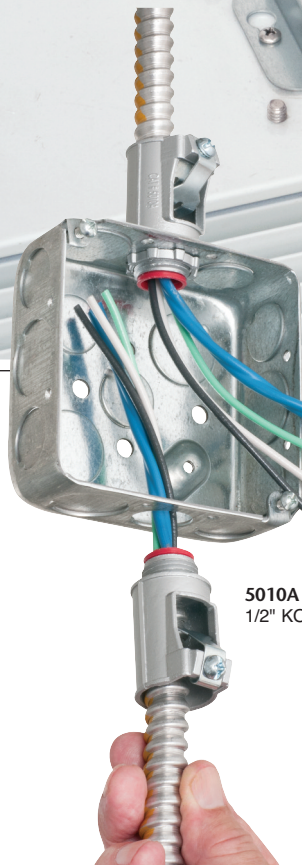

Ideal
for MC-PCS
conduit

5010A
1/2" KO

Locknut
attachment
in box



38A



40A



3838A



4040A



505010A

Arlington's SNAP²IT[®] fittings with locknuts deliver a fast, safe installation.

Fitting-on-cable installation is easy, and requires NO TOOLS! Just snap the fitting onto cable and twist clockwise. Tangs inside the fitting hold the cable secure.



3838A
1/2" KO


With this series the assembly installs into the knockout with a LOCKNUT.



The red tinting in the 40A, 4010A and 4040A indicates our 'OPEN TANG' design, meaning more room inside the fitting for easy insertion of wires.

- **Widest total cable ranges**
14/2 to 6/3
- **Widest variety of cables**
For AC, MCI-A, HCF steel and aluminum, steel and aluminum flexible metal conduit, MCI cable, continuous corrugated aluminum, AC90 and ACG90
- **Secure installation** No pullout
- Meets UL ground fault requirements
- **Fully assembled – Ready to use – Reusable connector**
For 1/2" KO, in single and duplex styles, all with insulated throat

Patented




Arlington[®]

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION SNAP ON FITTINGS	CABLE TRADE SIZE	KO SIZE	CABLE (OD) OUTSIDE DIA.	CABLE SIZE	UNIT PKG	STD PKG
38A	00038	Single gang, SILVER inside	3/8"	1/2"	.405 to .610	14/2 & 12/2 w and w/o ground, 14/3, 14/4,	50	500
3838A	36200	Duplex, SILVER inside	3/8"	1/2"	(2) .405 to .610	12/3, 12/4, 10/2, 10/3	25	100
40A	48015	Single gang, RED TINT Open Tang	3/8"	1/2"	.485 to .610	14/3, 12/2 & 12/3 w and w/o ground, 14/4, 12/4, 10/2, 10/3	50	500
4010A	11420	Single gang, RED TINT Open Tang	3/8"	1/2"	.405 to .610		50	500
4040A	40350	Duplex, RED TINT Open Tang	3/8"	1/2"	(2) .485 to .610		25	100
5010A	01299	Single gang, SILVER inside	1/2"	1/2"	.580 to .780		25	250
505010A	76214	Duplex, SILVER inside	1/2"	3/4"	(2) .590 to .820		25	25

SNAP²IT[®] MC Cable Connectors

with Locknut • Easy Snap-in Cable Insertion • NO TOOLS!

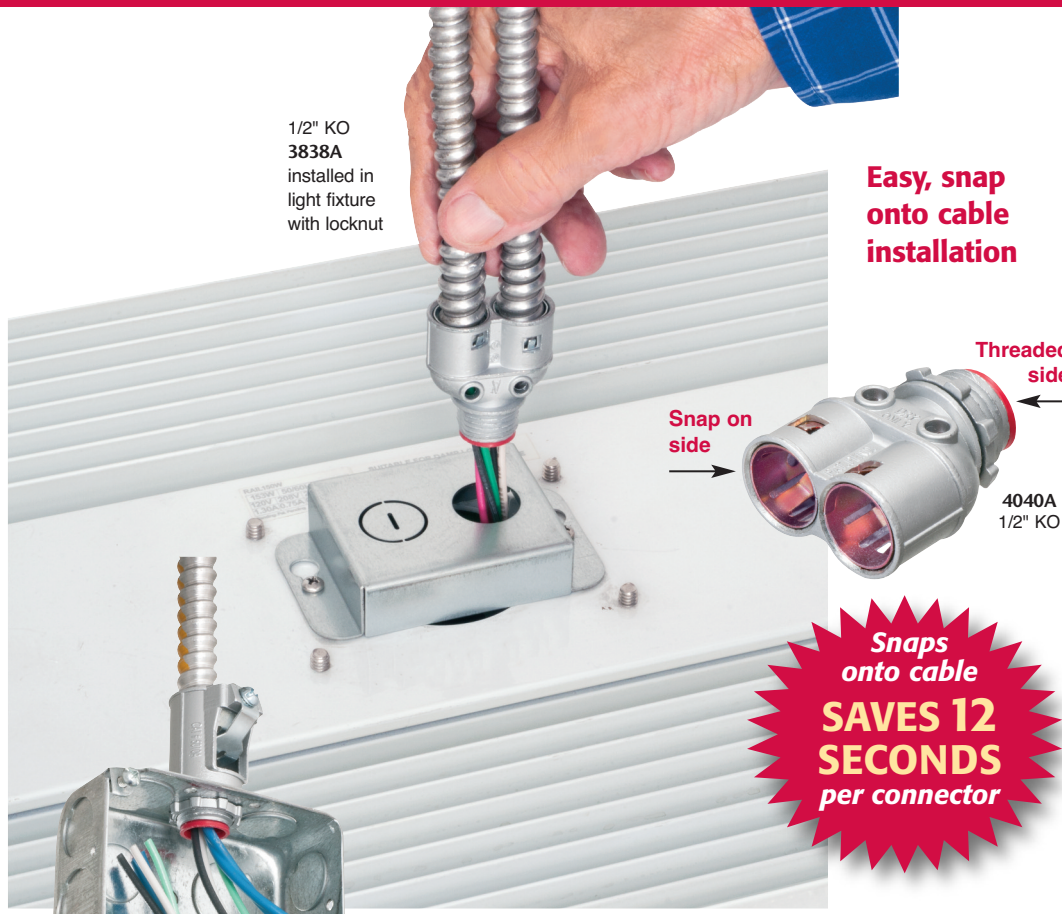

1/2" KO
3838A
installed in
light fixture
with locknut


Easy, snap
onto cable
installation

Snap on
side

Threaded
side

4040A
1/2" KO

Snap
onto cable
**SAVES 12
SECONDS
per connector**

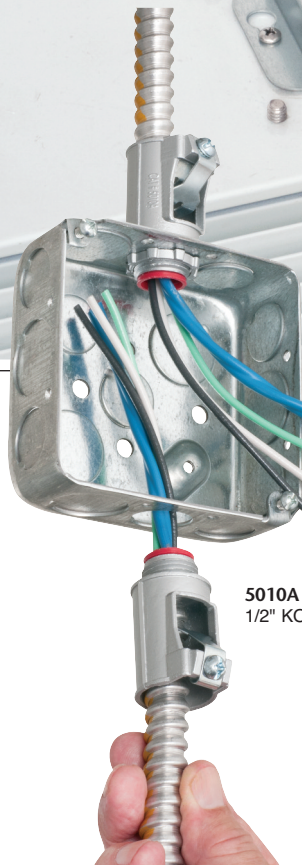

Ideal
for MC-PCS
conduit

5010A
1/2" KO

Locknut
attachment
in box



38A

40A

3838A

4040A

505010A

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION SNAP ON FITTINGS	CABLE TRADE SIZE	KO SIZE	CABLE (OD) OUTSIDE DIA.	CABLE SIZE	UNIT PKG	STD PKG
38A	00038	Single gang, SILVER inside	3/8"	1/2"	.405 to .610	14/2 & 12/2 w and w/o ground, 14/3, 14/4,	50	500
3838A	36200	Duplex, SILVER inside	3/8"	1/2"	(2) .405 to .610	12/3, 12/4, 10/2, 10/3	25	100
40A	48015	Single gang, RED TINT Open Tang	3/8"	1/2"	.485 to .610	14/3, 12/2 & 12/3 w and w/o ground, 14/4,	50	500
4010A	11420	Single gang, RED TINT Open Tang	3/8"	1/2"	.405 to .610	12/4, 10/2, 10/3	50	500
4040A	40350	Duplex, RED TINT Open Tang	3/8"	1/2"	(2) .485 to .610		25	100
5010A	01299	Single gang, SILVER inside	1/2"	1/2"	.580 to .780		25	250
505010A	76214	Duplex, SILVER inside	1/2"	3/4"	(2) .590 to .820	10/3 to 6/3	25	25

Arlington's SNAP²IT[®] fittings with locknuts deliver a fast, safe installation.

Fitting-on-cable installation is easy, and requires NO TOOLS! Just snap the fitting onto cable and twist clockwise. Tangs inside the fitting hold the cable secure.




3838A
1/2" KO

With this series the assembly installs into the knockout with a LOCKNUT.

The red tinting in the 40A, 4010A and 4040A indicates our 'OPEN TANG' design, meaning more room inside the fitting for easy insertion of wires.

- **Widest total cable ranges**
14/2 to 6/3
- **Widest variety of cables**
For AC, MCI-A, HCF steel and aluminum, steel and aluminum flexible metal conduit, MCI cable, continuous corrugated aluminum, AC90 and ACG90
- **Secure installation** No pullout
- Meets UL ground fault requirements
- **Fully assembled – Ready to use – Reusable connector**
For 1/2" KO, in single and duplex styles, all with insulated throat

Patented



Arlington[®]

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com