

**WIRE PULLING**

# **FOAM LUBRICANT**



**NO DRIPS! NO STAINS! NO MESS!**

**4x GREATER YIELD\***  
THAN GELS OR WAXES!

**SAVES MONEY!\*\***



For Professionals... Since 1857™

# Foam Wire Pulling Lubricant

## FOAM WIRE PULLING LUBRICANT


eliminates the mess and hassle of applying traditional gels or wax!



### NO DRIPS! NO STAINS! NO MESS!

- Foam lubricant is applied directly into the conduit. No need to pre-coat wires.
- No mess formula stays where it is applied, even in vertical conduit!
- Dissolves clean from hands and clothing.

## 4x GREATER YIELD\* THAN GELS OR WAXES!

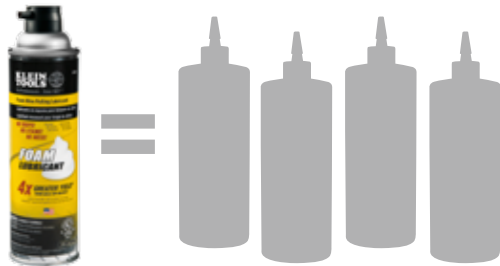

- 19 oz. can easier to carry on a jobsite than four quart bottles.
- Easier to divide among multiple electricians than a large 5 gallon bucket.

Cat. No.	UPC# 0-92644+	Net Weight
51100	51100-4	19 oz.

\*One can equals one gallon or 4 quarts of wax/gel lubricants. Based on job site pulls with foam in 3/4" conduit when used as directed.

\*\*When compared to published list price of 4 quart size bottles of Klein Tools gel or wax lubricant.

#### Danger:

- Extremely flammable propellant
- Keep out of reach of children

1	HEALTH
2	FLAMMABILITY
0	REACTIVITY
A	PERSONAL PROTECTION



See our complete line of Wire Pulling products

[www.kleintools.com](http://www.kleintools.com)



51100

**MADE IN USA**



© 2017 Klein Tools, Inc.  
Lincolnshire, IL 60069-1418  
Rev. 04/17 C 96245