




Pass & Seymour


# Straight Blade Receptacles Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

## LED Indicator Only

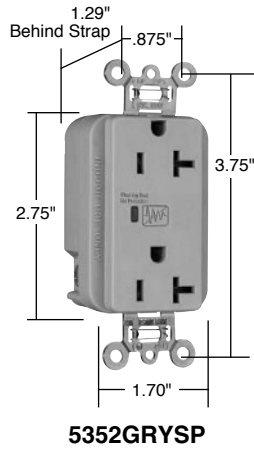

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance			
					UL1449	UL498	FSUL WC596	cUL/CSA
<b>Duplex Receptacles Back &amp; Side Wire</b>								
5252ISP	15	125	5-15R	Ivory	•	•	•	•
5252WSP	15	125	5-15R	White	•	•	•	•
5252GRYSP	15	125	5-15R	Gray	•	•	•	•
5252BKSP	15	125	5-15R	Black	•	•	•	•
5252LASP	15	125	5-15R	Light Almond	•	•	•	•
5252BLSP	15	125	5-15R	Blue	•	•	•	•
5352ISP	20	125	5-20R	Ivory	•	•	•	•
5352WSP	20	125	5-20R	White	•	•	•	•
5352GRYSP	20	125	5-20R	Gray	•	•	•	•
5352BKSP	20	125	5-20R	Black	•	•	•	•
5352LASP	20	125	5-20R	Light Almond	•	•	•	•
5352BLSP	20	125	5-20R	Blue	•	•	•	•

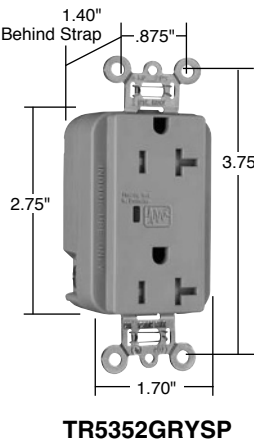

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance			
					UL1449	UL498	FSUL WC596	cUL/CSA
<b>Tamper-Resistant Duplex Receptacles Back &amp; Side Wire*</b>								
TR5252ISP	15	125	5-15R	Ivory	•	•	•	•
TR5252WSP	15	125	5-15R	White	•	•	•	•
TR5252GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5252BKSP	15	125	5-15R	Black	•	•	•	•
TR5252LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5252BLSP	15	125	5-15R	Blue	•	•	•	•
TR5352ISP	20	125	5-20R	Ivory	•	•	•	•
TR5352WSP	20	125	5-20R	White	•	•	•	•
TR5352GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5352BKSP	20	125	5-20R	Black	•	•	•	•
TR5352LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5352BLSP	20	125	5-20R	Blue	•	•	•	•



NEMA  
5-15R



NEMA  
5-20R

\*Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

# Devices & Wall Plates Color Selection Chart



Pass & Seymour

## Devices & Plastic Wall Plate Colors

Ivory	Light Almond	White	Green		
Black	Blue	Brown	Gray	Orange	Red

See specific device and wall plate catalog charts for particular color availabilities.

## Metal Wall Plates

Aluminum	Brass (Brushed)	Polished Brass	Stainless Steel	Brushed Bronze	Chrome

**Metal Finish**

## Custom Metal Wall Plates Paint Finish Colors

Orange	Green	Gray	Yellow	Glossy Black	Brown	White
Primer	Red	Pink	Flat Black	Ivory	Light Almond	Blue

**Paint Color**

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.

# Technical Specifications Surge Protective Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



Pass & Seymour

Typical Specifications	
Manufacturer's Identification: Legrand/Pass & Seymour 5252ISP	
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/IEEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.	

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> 5252ISP	Ivory	15A 125VAC	5-15R	<input type="checkbox"/> 5352ISP	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 5252WSP	White	15A 125VAC	5-15R	<input type="checkbox"/> 5352WSP	White	20A 125VAC	5-20R
<input type="checkbox"/> 5252GRYSP	Gray	15A 125VAC	5-15R	<input type="checkbox"/> 5352GRYSP	Gray	20A 125VAC	5-20R
<input type="checkbox"/> 5252BKSP	Black	15A 125VAC	5-15R	<input type="checkbox"/> 5352BKSP	Black	20A 125VAC	5-20R
<input type="checkbox"/> 5252LASP	Lt Almond	15A 125VAC	5-15R	<input type="checkbox"/> 5352LASP	Lt Almond	20A 125VAC	5-20R
<input type="checkbox"/> 5252BLSP	Blue	15A 125VAC	5-15R	<input type="checkbox"/> 5352BLSP	Blue	20A 125VAC	5-20R

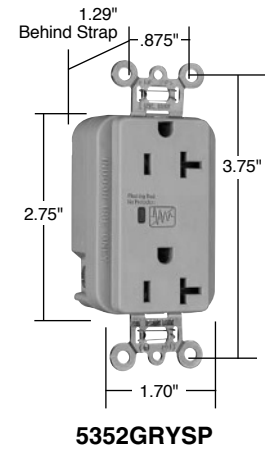


Performance			
<b>Electrical</b>			
Frequency	60 Hz		
Voltage	125VAC		
MOV Rating	130V 17mm Dual Pack		
Suppressed Voltage	500V		
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode		
Max Surge Capability	24kA		
Protection Modes	Normal and Common Mode: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping		
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 $\mu$ F 7:1 Average Noise Reduction		
Thermal Protection	Two Thermal Fuses (128°C or 262°F)		
Overcurrent Protection	Two Fuses Protects 3 Modes		
Operating Temperature	-20°C to 55°C (-4 to 131°F)		
Storage Temperature	-40°C to 85°C (-40 to 185°F)		
<b>Mechanical</b>			
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground		
Terminal Accommodation	#14 – 10 AWG copper conductor only		
Product Identification	Ratings are a permanent part of device		
Weight	125 grams		
<b>Environmental</b>			
Flammability	UL94 V2		
<b>Materials</b>			
Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
<b>Warranty</b>		1 year	

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

### Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



<b>Project</b>
<b>Location/Type</b>




Pass & Seymour


## Straight Blade Receptacles Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

### LED Indicator Only

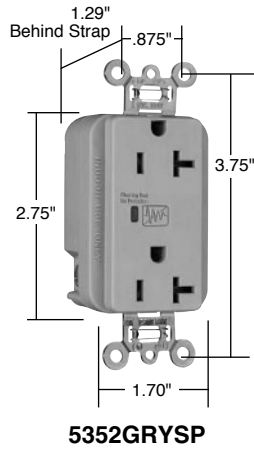

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance			
					UL1449	UL498	FSUL WC596	cUL/CSA
<b>Duplex Receptacles Back &amp; Side Wire</b>								
5252ISP	15	125	5-15R	Ivory	•	•	•	•
5252WSP	15	125	5-15R	White	•	•	•	•
5252GRYSP	15	125	5-15R	Gray	•	•	•	•
5252BKSP	15	125	5-15R	Black	•	•	•	•
5252LASP	15	125	5-15R	Light Almond	•	•	•	•
5252BLSP	15	125	5-15R	Blue	•	•	•	•
5352ISP	20	125	5-20R	Ivory	•	•	•	•
5352WSP	20	125	5-20R	White	•	•	•	•
5352GRYSP	20	125	5-20R	Gray	•	•	•	•
5352BKSP	20	125	5-20R	Black	•	•	•	•
5352LASP	20	125	5-20R	Light Almond	•	•	•	•
5352BLSP	20	125	5-20R	Blue	•	•	•	•

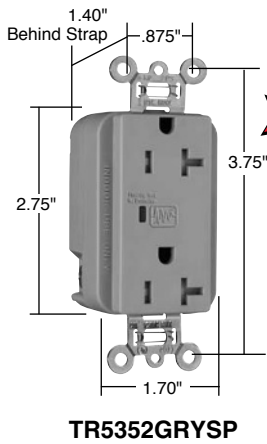

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance			
					UL1449	UL498	FSUL WC596	cUL/CSA
<b>Tamper-Resistant Duplex Receptacles Back &amp; Side Wire*</b>								
TR5252ISP	15	125	5-15R	Ivory	•	•	•	•
TR5252WSP	15	125	5-15R	White	•	•	•	•
TR5252GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5252BKSP	15	125	5-15R	Black	•	•	•	•
TR5252LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5252BLSP	15	125	5-15R	Blue	•	•	•	•
TR5352ISP	20	125	5-20R	Ivory	•	•	•	•
TR5352WSP	20	125	5-20R	White	•	•	•	•
TR5352GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5352BKSP	20	125	5-20R	Black	•	•	•	•
TR5352LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5352BLSP	20	125	5-20R	Blue	•	•	•	•



NEMA  
5-15R



NEMA  
5-20R

\*Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

# Devices & Wall Plates Color Selection Chart



Pass & Seymour

## Devices & Plastic Wall Plate Colors

Ivory	Light Almond	White	Green		
Black	Blue	Brown	Gray	Orange	Red

See specific device and wall plate catalog charts for particular color availabilities.

## Metal Wall Plates

Aluminum	Brass (Brushed)	Polished Brass	Stainless Steel	Brushed Bronze	Chrome

**Metal Finish**

## Custom Metal Wall Plates Paint Finish Colors

Orange	Green	Gray	Yellow	Glossy Black	Brown	White
Primer	Red	Pink	Flat Black	Ivory	Light Almond	Blue

**Paint Color**

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.

# Technical Specifications Surge Protective Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



Pass & Seymour

Typical Specifications	
Manufacturer's Identification: Legrand/Pass & Seymour 5252ISP	
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/IEEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.	

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> 5252ISP	Ivory	15A 125VAC	5-15R	<input type="checkbox"/> 5352ISP	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 5252WSP	White	15A 125VAC	5-15R	<input type="checkbox"/> 5352WSP	White	20A 125VAC	5-20R
<input type="checkbox"/> 5252GRYSP	Gray	15A 125VAC	5-15R	<input type="checkbox"/> 5352GRYSP	Gray	20A 125VAC	5-20R
<input type="checkbox"/> 5252BKSP	Black	15A 125VAC	5-15R	<input type="checkbox"/> 5352BKSP	Black	20A 125VAC	5-20R
<input type="checkbox"/> 5252LASP	Lt Almond	15A 125VAC	5-15R	<input type="checkbox"/> 5352LASP	Lt Almond	20A 125VAC	5-20R
<input type="checkbox"/> 5252BLSP	Blue	15A 125VAC	5-15R	<input type="checkbox"/> 5352BLSP	Blue	20A 125VAC	5-20R

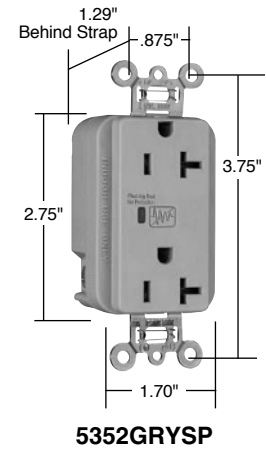


Performance			
<b>Electrical</b>			
Frequency	60 Hz		
Voltage	125VAC		
MOV Rating	130V 17mm Dual Pack		
Suppressed Voltage	500V		
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode		
Max Surge Capability	24kA		
Protection Modes	Normal and Common Mode: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping		
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 $\mu$ F 7:1 Average Noise Reduction		
Thermal Protection	Two Thermal Fuses (128°C or 262°F)		
Overcurrent Protection	Two Fuses Protects 3 Modes		
Operating Temperature	-20°C to 55°C (-4 to 131°F)		
Storage Temperature	-40°C to 85°C (-40 to 185°F)		
<b>Mechanical</b>			
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground		
Terminal Accommodation	#14 – 10 AWG copper conductor only		
Product Identification	Ratings are a permanent part of device		
Weight	125 grams		
<b>Environmental</b>			
Flammability	UL94 V2		
<b>Materials</b>			
Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
<b>Warranty</b>		1 year	

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

### Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



<b>Project</b>
<b>Location/Type</b>