



Industrial Clamp Meters



- 660 and 1000 amp clamps for a variety of industrial and commercial environments
- Unique TightSight™ bottom display makes hard-to-reach measurements convenient
- New easy-to-read displays feature large numbers and green glowing backlight
- CAT IV rating for maximum safety
- Selectable audible voltage presence warning on all functions




Exclusive
TightSight™
Display





Industrial Clamp Meters

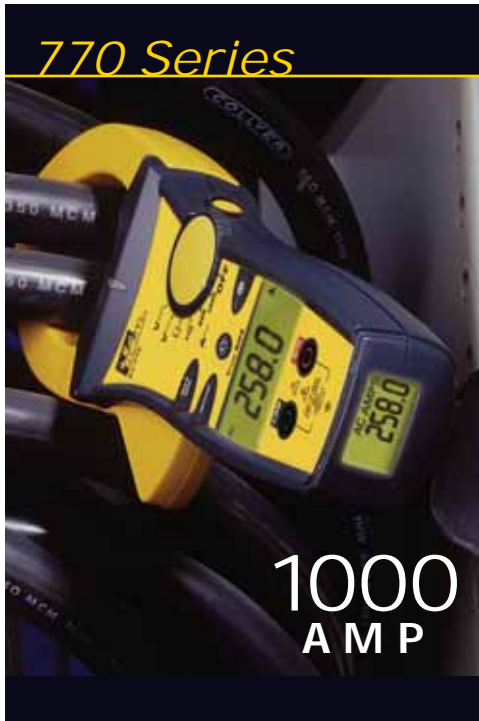

770 Series

1000
AMP

IDEAL developed the 770 Series to provide electricians with all the features they need for measuring in 1000A environments and industrial settings. The unique backlit display in the bottom of the clamp is an industry first. It enables an electrician to view measurement results in dark, bright or tight locations without difficulty or safety risk. Electricians have a choice between the 61-772 for testing large AC current, or the 61-774 for AC/DC testing capabilities. Both are True RMS and feature large 2-inch jaws for getting around multiple phase conductors.

770 Series Common Features:

- Measures up to 1000AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- True RMS
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;
CAT III – 1000V rating
- 2-year warranty



▶ 61-772

▶ 61-774 features:

- 1000A DC current measurements
- Capacitance



760 Series

660
AMP

For everything from routine current measurements to troubleshooting industrial motors and adjustable speed drives (ASDs), three 760 Series meters cover every scenario up to 660A. With an exclusive backlit TightSight™ display, the 760 Series brings function and ease-of-use together. The 61-764 is great for basic current measurements, but also has an array of more extensive features like a bold, bright backlit display and selectable auto power off. With added capabilities like True RMS and 20-400Hz frequency measurement, the 61-766 gives electricians a level of certainty when measuring circuits with ASDs. And for those who work with DC motors and circuits, the 61-768 is the right choice.

760 Series Common Features:

- Measures up to 660AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;
CAT III – 1000V rating
- 2-year warranty



▶ 61-764

▶ 61-766 features:

- True RMS
- Capacitance
- Frequency measurement via clamp head
- 66AAC low range

▶ 61-768 features:

- 660A DC current measurements
- True RMS



Selectable audible and visual high voltage indication over 30V AC/DC across the leads on all functions (audible switch in battery compartment)

Contains all the capabilities of a full-function multimeter

One-touch backlight button for glowing green display illumination

Data hold button and offset thumb wheel for one-handed operation

Large numbers and symbols are easy to read

Patented backlit TightSight™ display for viewing in dark, bright or tight locations; Hinged rubber cover prevents display damage (field replaceable)

Tapered jaws with hook tip for tight locations and easy wire separation

Safety First!

The complete line of industrial clamps from IDEAL was designed to set a new standard for safety technology. It starts with the revolutionary TightSight™ display. It allows an electrician to keep his head and face out of potentially dangerous panels while viewing the measurement. The high voltage indicator is another feature not to be taken for granted. It indicates the presence of voltage even with the dial set to the wrong function. The CAT III and IV ratings, rugged construction and UL listing should give every electrician the confidence to go about the job without worrying about equipment safety.

Description	Cat No.
660AAC	61-764
660AAC w/TRMS, Capacitance, Frequency, 66AAC Low Range	61-766
660AAC w/TRMS, DC Current	61-768
1000AAC w/TRMS	61-772
1000AAC w/TRMS, DC Current, Capacitance	61-774
Industrial Test Lead Kit	TL-435

760 Series	Range & Resolution			Accuracy
	61-764	61-766	61-768	
AC Current	66.00/660.0 A			1.7%
DC Current	-	-	660.0 A	1.5%
AC Voltage	660m/6.600/66.00/660.0/750 V			1.2%
DC Voltage	660m/6.600/66.00/660.0/1000 V			0.5%
Resistance	660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω			1.0%
Capacitance	-	6.600μ/66.00μ/660.0μ F	-	3.0%
Frequency	-	20 - 400 Hz Sensitivity: ≥5A for 20-100 Hz ≥10A for 100-400 Hz	-	0.1%


Jaw Size 1.42" (36 mm)

770 Series	Range & Resolution		Accuracy
	61-772	61-774	
AC Current	660.0/1000 A		1.7%
DC Current	-	660.0/1000 A	1.5%
AC Voltage	660m/6.600/66.00/660.0/750 V		1.2%
DC Voltage	660m/6.600/66.00/660.0/1000 V		0.5%
Resistance	660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω		1.0%
Capacitance	-	6.600μ/66.00μ/660.0μ F	3.0%

Jaw Size 2" (51 mm)



600 Amp Clamp Meters

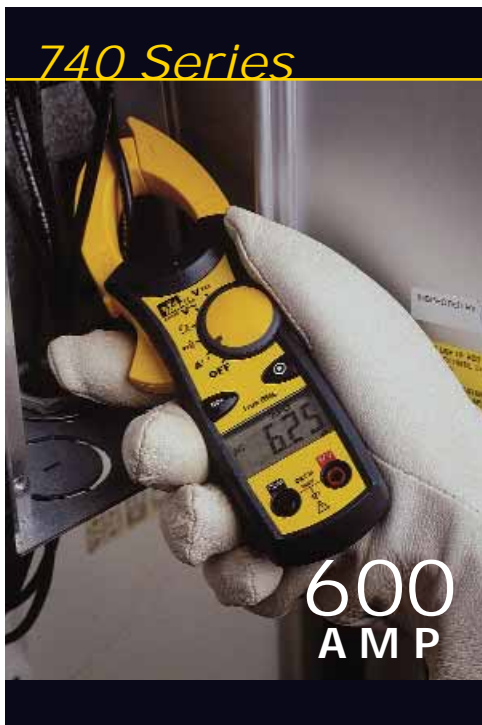

For electricians looking for a dependable, affordable 600A clamp meter, it's tough to beat the IDEAL 740 Series. From a non-contact voltage indicator at the tip of the jaws, to a large easy-to-read display, the 740 Series clamps make current measurements simple and reliable. The compact frame fits comfortably in the hand and makes it convenient in tight panels. And for those working in harmonic environments, the 61-746 features True RMS measurements.

740 Series Common Features:

- Measures up to 600AAC
- Non-contact voltage indicator (70V-600VAC)
- Tapered jaws with hook tip
- Auto/manual ranging
- Data hold
- Auto power off
- Low battery indicator
- Includes leads and case
- CAT III – 600V rating
- 2-year warranty



▶ 61-744



▶ 61-746 features:

- True RMS

Description	Cat No.
600AAC Clamp Meter w/NCV	61-744
600AAC Clamp Meter w/NCV, TRMS	61-746

740 Series	Range & Resolution 61-744 & 61-746	Accuracy
AC Current	40.00/400.0/600A	1.7%
AC Voltage	400.0/600 V	1.2%
DC Voltage	400.0/600 V	0.5%
Resistance	400.0/4.000k/40.00k 400.0k/4.000M/40.00M Ω	1.0%

Jaw Size 1.25" (32 mm)

Tapered jaws with hook tip for easy wire separation



Convenient one-touch non-contact voltage indication

Data hold button conveniently located for thumb

Auto/manual ranging

Easy-to-read large numbers and symbols

IDEAL INDUSTRIES, INC.
 Technical Hotline / 877-201-9005
 Becker Place, Sycamore, IL 60178, USA / 815-895-5181 · 800-435-0705 in USA

International offices:
 Australia · Brazil · Canada · China · Germany · Mexico · Puerto Rico · UK
 For complete sales office contact information, visit us at:
www.idealindustries.com · www.testersandmeters.com

Rev. 12/07
 Printed in U.S.A.



N12966

Form No. P-2517
 ©2007 IDEAL INDUSTRIES, INC.



Industrial Clamp Meters

- 660 and 1000 amp clamps for a variety of industrial and commercial environments
- Unique TightSight™ bottom display makes hard-to-reach measurements convenient
- New easy-to-read displays feature large numbers and green glowing backlight
- CAT IV rating for maximum safety
- Selectable audible voltage presence warning on all functions




Exclusive
TightSight™
Display





Industrial Clamp Meters

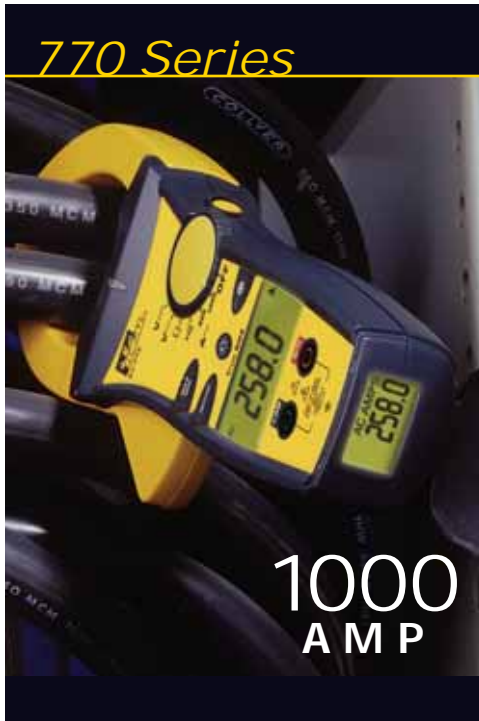

770 Series

1000
AMP

IDEAL developed the 770 Series to provide electricians with all the features they need for measuring in 1000A environments and industrial settings. The unique backlit display in the bottom of the clamp is an industry first. It enables an electrician to view measurement results in dark, bright or tight locations without difficulty or safety risk. Electricians have a choice between the 61-772 for testing large AC current, or the 61-774 for AC/DC testing capabilities. Both are True RMS and feature large 2-inch jaws for getting around multiple phase conductors.

770 Series Common Features:

- Measures up to 1000AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- True RMS
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;
CAT III – 1000V rating
- 2-year warranty



▶ 61-772

▶ 61-774 features:

- 1000A DC current measurements
- Capacitance



760 Series

660
AMP

For everything from routine current measurements to troubleshooting industrial motors and adjustable speed drives (ASDs), three 760 Series meters cover every scenario up to 660A. With an exclusive backlit TightSight™ display, the 760 Series brings function and ease-of-use together. The 61-764 is great for basic current measurements, but also has an array of more extensive features like a bold, bright backlit display and selectable auto power off. With added capabilities like True RMS and 20-400Hz frequency measurement, the 61-766 gives electricians a level of certainty when measuring circuits with ASDs. And for those who work with DC motors and circuits, the 61-768 is the right choice.

760 Series Common Features:

- Measures up to 660AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;
CAT III – 1000V rating
- 2-year warranty



▶ 61-764

▶ 61-766 features:

- True RMS
- Capacitance
- Frequency measurement via clamp head
- 66AAC low range

▶ 61-768 features:

- 660A DC current measurements
- True RMS



Selectable audible and visual high voltage indication over 30V AC/DC across the leads on all functions (audible switch in battery compartment)

Contains all the capabilities of a full-function multimeter

One-touch backlight button for glowing green display illumination

Tapered jaws with hook tip for tight locations and easy wire separation

Data hold button and offset thumb wheel for one-handed operation

Large numbers and symbols are easy to read

Patented backlit TightSight™ display for viewing in dark, bright or tight locations; Hinged rubber cover prevents display damage (field replaceable)

Safety First!

The complete line of industrial clamps from IDEAL was designed to set a new standard for safety technology. It starts with the revolutionary TightSight™ display. It allows an electrician to keep his head and face out of potentially dangerous panels while viewing the measurement. The high voltage indicator is another feature not to be taken for granted. It indicates the presence of voltage even with the dial set to the wrong function. The CAT III and IV ratings, rugged construction and UL listing should give every electrician the confidence to go about the job without worrying about equipment safety.

Description	Cat No.
660AAC	61-764
660AAC w/TRMS, Capacitance, Frequency, 66AAC Low Range	61-766
660AAC w/TRMS, DC Current	61-768
1000AAC w/TRMS	61-772
1000AAC w/TRMS, DC Current, Capacitance	61-774
Industrial Test Lead Kit	TL-435

760 Series	Range & Resolution			Accuracy
	61-764	61-766	61-768	
AC Current	66.00/660.0 A		660.0 A	1.7%
DC Current	-	-	660.0 A	1.5%
AC Voltage	660m/6.600/66.00/660.0/750 V			1.2%
DC Voltage	660m/6.600/66.00/660.0/1000 V			0.5%
Resistance	660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω			1.0%
Capacitance	-	6.600μ/66.00μ/660.0μ F	-	3.0%
Frequency	-	20 - 400 Hz Sensitivity: ≥5A for 20-100 Hz ≥10A for 100-400 Hz	-	0.1%


Jaw Size 1.42" (36 mm)

770 Series	Range & Resolution		Accuracy
	61-772	61-774	
AC Current	660.0/1000 A		1.7%
DC Current	-	660.0/1000 A	1.5%
AC Voltage	660m/6.600/66.00/660.0/750 V		1.2%
DC Voltage	660m/6.600/66.00/660.0/1000 V		0.5%
Resistance	660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω		1.0%
Capacitance	-	6.600μ/66.00μ/660.0μ F	3.0%

Jaw Size 2" (51 mm)



600 Amp Clamp Meters

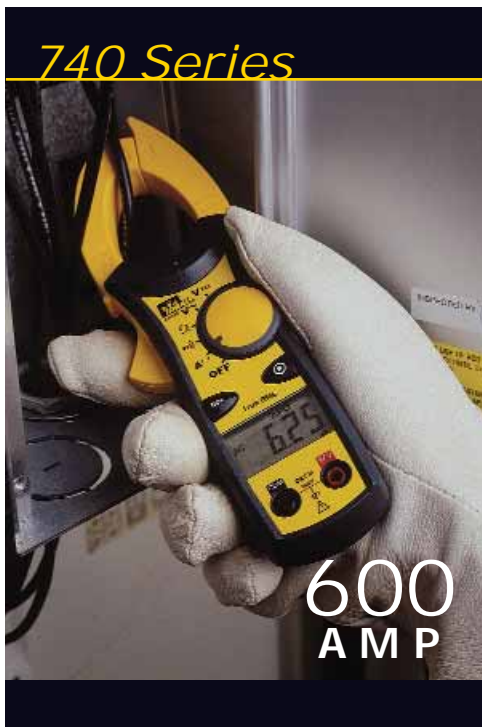

For electricians looking for a dependable, affordable 600A clamp meter, it's tough to beat the IDEAL 740 Series. From a non-contact voltage indicator at the tip of the jaws, to a large easy-to-read display, the 740 Series clamps make current measurements simple and reliable. The compact frame fits comfortably in the hand and makes it convenient in tight panels. And for those working in harmonic environments, the 61-746 features True RMS measurements.

740 Series Common Features:

- Measures up to 600AAC
- Non-contact voltage indicator (70V-600VAC)
- Tapered jaws with hook tip
- Auto/manual ranging
- Data hold
- Auto power off
- Low battery indicator
- Includes leads and case
- CAT III – 600V rating
- 2-year warranty



▶ 61-744



▶ 61-746 features:

- True RMS

Description	Cat No.
600AAC Clamp Meter w/NCV	61-744
600AAC Clamp Meter w/NCV, TRMS	61-746

740 Series	Range & Resolution 61-744 & 61-746	Accuracy
AC Current	40.00/400.0/600A	1.7%
AC Voltage	400.0/600 V	1.2%
DC Voltage	400.0/600 V	0.5%
Resistance	400.0/4.000k/40.00k 400.0k/4.000M/40.00M Ω	1.0%

Jaw Size 1.25" (32 mm)

Tapered jaws with hook tip for easy wire separation



Convenient one-touch non-contact voltage indication

Data hold button conveniently located for thumb

Auto/manual ranging

Easy-to-read large numbers and symbols

IDEAL INDUSTRIES, INC.
 Technical Hotline / 877-201-9005
 Becker Place, Sycamore, IL 60178, USA / 815-895-5181 · 800-435-0705 in USA

International offices:
 Australia · Brazil · Canada · China · Germany · Mexico · Puerto Rico · UK
 For complete sales office contact information, visit us at:
www.idealindustries.com · www.testersandmeters.com

Rev. 12/07
 Printed in U.S.A.



N12966



Form No. P-2517
 ©2007 IDEAL INDUSTRIES, INC.