



## Industrial Clamp Meters

- 660 and 1000 amp clamps for a variety of industrial and commercial environments
- Unique TightSight™ bottom display makes hard-to-reach measurements convenient
- New easy-to-read displays feature large numbers and green glowing backlight
- CAT IV rating for maximum safety
- Selectable audible voltage presence warning on all functions




Exclusive  
TightSight™  
Display





# Industrial Clamp Meters

## 770 Series

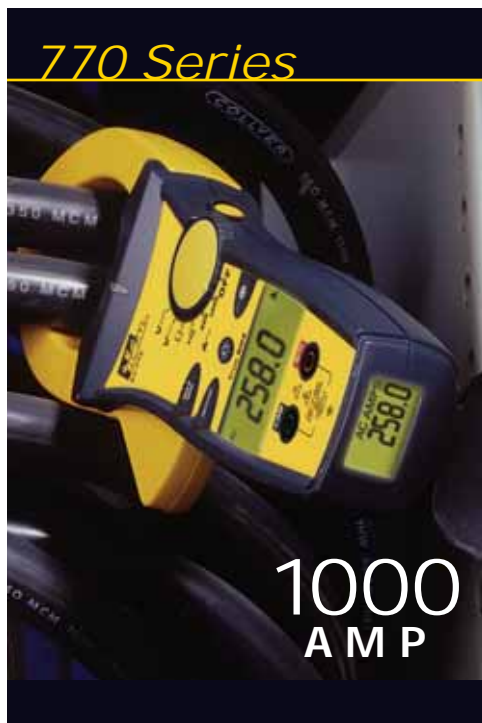

IDEAL developed the 770 Series to provide electricians with all the features they need for measuring in 1000A environments and industrial settings. The unique backlit display in the bottom of the clamp is an industry first. It enables an electrician to view measurement results in dark, bright or tight locations without difficulty or safety risk. Electricians have a choice between the 61-772 for testing large AC current, or the 61-774 for AC/DC testing capabilities. Both are True RMS and feature large 2-inch jaws for getting around multiple phase conductors.

### 770 Series Common Features:

- Measures up to 1000AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- True RMS
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;  
CAT III – 1000V rating
- 2-year warranty



▶ 61-772

▶ 61-774 features:

- 1000A DC current measurements
- Capacitance

## 760 Series



For everything from routine current measurements to troubleshooting industrial motors and adjustable speed drives (ASDs), three 760 Series meters cover every scenario up to 660A. With an exclusive backlit TightSight™ display, the 760 Series brings function and ease-of-use together. The 61-764 is great for basic current measurements, but also has an array of more extensive features like a bold, bright backlit display and selectable auto power off. With added capabilities like True RMS and 20-400Hz frequency measurement, the 61-766 gives electricians a level of certainty when measuring circuits with ASDs. And for those who work with DC motors and circuits, the 61-768 is the right choice.

### 760 Series Common Features:

- Measures up to 660AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;  
CAT III – 1000V rating
- 2-year warranty



▶ 61-764

▶ 61-766 features:

- True RMS
- Capacitance
- Frequency measurement via clamp head
- 66AAC low range

▶ 61-768 features:

- 660A DC current measurements
- True RMS





Selectable audible and visual high voltage indication over 30V AC/DC across the leads on all functions (audible switch in battery compartment)

Contains all the capabilities of a full-function multimeter

One-touch backlight button for glowing green display illumination

Data hold button and offset thumb wheel for one-handed operation

Large numbers and symbols are easy to read

Patented backlit TightSight™ display for viewing in dark, bright or tight locations; Hinged rubber cover prevents display damage (field replaceable)

Tapered jaws with hook tip for tight locations and easy wire separation

## Safety First!

The complete line of industrial clamps from IDEAL was designed to set a new standard for safety technology. It starts with the revolutionary TightSight™ display. It allows an electrician to keep his head and face out of potentially dangerous panels while viewing the measurement. The high voltage indicator is another feature not to be taken for granted. It indicates the presence of voltage even with the dial set to the wrong function. The CAT III and IV ratings, rugged construction and UL listing should give every electrician the confidence to go about the job without worrying about equipment safety.

| Description  | Cat No. |
|--|---------|
| 660AAC   | 61-764  |
| 660AAC w/TRMS, Capacitance, Frequency, 66AAC Low Range | 61-766  |
| 660AAC w/TRMS, DC Current                              | 61-768  |
| 1000AAC w/TRMS   | 61-772  |
| 1000AAC w/TRMS, DC Current, Capacitance                | 61-774  |
| Industrial Test Lead Kit                               | TL-435  |

| 760 Series  | Range & Resolution                         |  |         | Accuracy |
|-------------|--|--|---------|----------|
|             | 61-764                                     | 61-766   | 61-768  |          |
| AC Current  | 66.00/660.0 A                              |  | 660.0 A | 1.7%     |
| DC Current  | –  | –  | 660.0 A | 1.5%     |
| AC Voltage  | 660m/6.600/66.00/660.0/750 V               |  |         | 1.2%     |
| DC Voltage  | 660m/6.600/66.00/660.0/1000 V              |  |         | 0.5%     |
| Resistance  | 660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω |  |         | 1.0%     |
| Capacitance | –  | 6.600μ/66.00μ/660.0μ F   | –       | 3.0%     |
| Frequency   | –  | 20 - 400 Hz<br>Sensitivity: ≥5A for 20-100 Hz<br>≥10A for 100-400 Hz | –       | 0.1%     |


Jaw Size 1.42" (36 mm)

| 770 Series  | Range & Resolution                         |                        | Accuracy |
|-------------|--|------------------------|----------|
|             | 61-772                                     | 61-774                 |          |
| AC Current  | 660.0/1000 A                               |                        | 1.7%     |
| DC Current  | –  | 660.0/1000 A           | 1.5%     |
| AC Voltage  | 660m/6.600/66.00/660.0/750 V               |                        | 1.2%     |
| DC Voltage  | 660m/6.600/66.00/660.0/1000 V              |                        | 0.5%     |
| Resistance  | 660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω |                        | 1.0%     |
| Capacitance | –  | 6.600μ/66.00μ/660.0μ F | 3.0%     |

Jaw Size 2" (51 mm)



# 600 Amp Clamp Meters

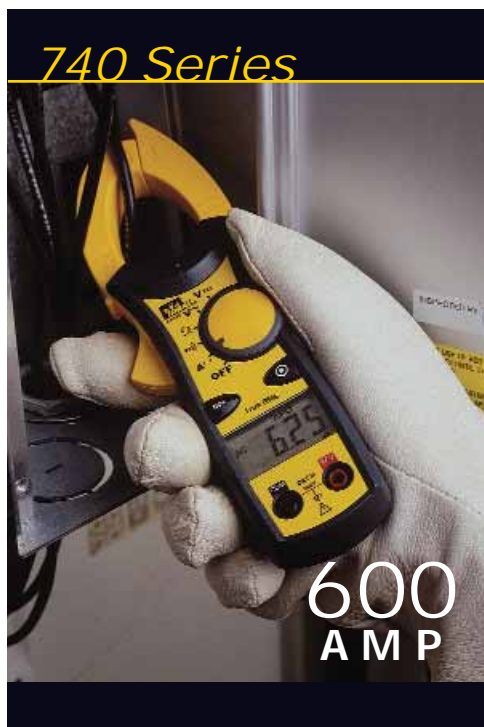

For electricians looking for a dependable, affordable 600A clamp meter, it's tough to beat the IDEAL 740 Series. From a non-contact voltage indicator at the tip of the jaws, to a large easy-to-read display, the 740 Series clamps make current measurements simple and reliable. The compact frame fits comfortably in the hand and makes it convenient in tight panels. And for those working in harmonic environments, the 61-746 features True RMS measurements.

## 740 Series Common Features:

- Measures up to 600AAC
- Non-contact voltage indicator (70V-600VAC)
- Tapered jaws with hook tip
- Auto/manual ranging
- Data hold
- Auto power off
- Low battery indicator
- Includes leads and case
- CAT III – 600V rating
- 2-year warranty



▶ 61-744



▶ 61-746 features:

- True RMS

| Description                    | Cat No. |
|--------------------------------|---------|
| 600AAC Clamp Meter w/NCV       | 61-744  |
| 600AAC Clamp Meter w/NCV, TRMS | 61-746  |

| 740 Series | Range & Resolution<br>61-744 & 61-746         | Accuracy |
|------------|---|----------|
| AC Current | 40.00/400.0/600A                              | 1.7%     |
| AC Voltage | 400.0/600 V                                   | 1.2%     |
| DC Voltage | 400.0/600 V                                   | 0.5%     |
| Resistance | 400.0/4.000k/40.00k<br>400.0k/4.000M/40.00M Ω | 1.0%     |

Jaw Size 1.25" (32 mm)

Tapered jaws with  
hook tip for easy  
wire separation

Convenient one-touch  
non-contact voltage  
indication

Data hold button  
conveniently located  
for thumb

Auto/manual ranging

Easy-to-read  
large numbers  
and symbols



## IDEAL INDUSTRIES, INC.

Technical Hotline / 877-201-9005

Becker Place, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA

International offices:

Australia • Brazil • Canada • China • Germany • Mexico • Puerto Rico • UK

For complete sales office contact information, visit us at:

[www.idealindustries.com](http://www.idealindustries.com) • [www.testersandmeters.com](http://www.testersandmeters.com)

Rev. 12/07  
Printed in U.S.A.



N12966

Form No. P-2517  
©2007 IDEAL INDUSTRIES, INC.



## Industrial Clamp Meters

- 660 and 1000 amp clamps for a variety of industrial and commercial environments
- Unique TightSight™ bottom display makes hard-to-reach measurements convenient
- New easy-to-read displays feature large numbers and green glowing backlight
- CAT IV rating for maximum safety
- Selectable audible voltage presence warning on all functions








# Industrial Clamp Meters

## 770 Series

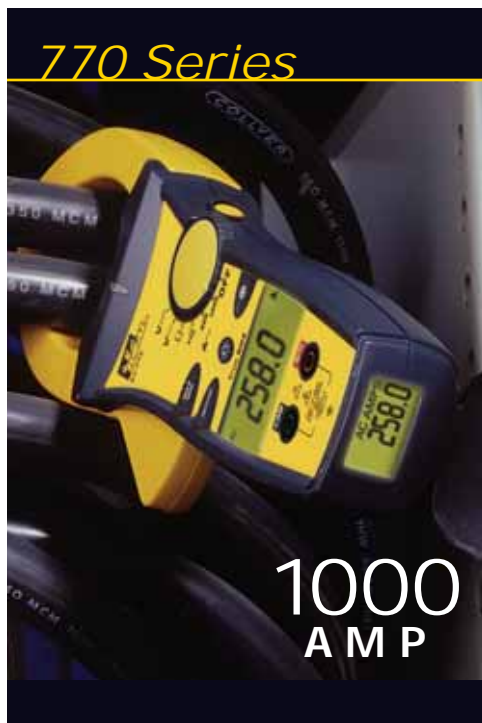

1000  
AMP

IDEAL developed the 770 Series to provide electricians with all the features they need for measuring in 1000A environments and industrial settings. The unique backlit display in the bottom of the clamp is an industry first. It enables an electrician to view measurement results in dark, bright or tight locations without difficulty or safety risk. Electricians have a choice between the 61-772 for testing large AC current, or the 61-774 for AC/DC testing capabilities. Both are True RMS and feature large 2-inch jaws for getting around multiple phase conductors.

### 770 Series Common Features:

- Measures up to 1000AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- True RMS
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;  
CAT III – 1000V rating
- 2-year warranty



▶ 61-772



▶ 61-774 features:

- 1000A DC current measurements
- Capacitance

## 760 Series



660  
AMP

For everything from routine current measurements to troubleshooting industrial motors and adjustable speed drives (ASDs), three 760 Series meters cover every scenario up to 660A. With an exclusive backlit TightSight™ display, the 760 Series brings function and ease-of-use together. The 61-764 is great for basic current measurements, but also has an array of more extensive features like a bold, bright backlit display and selectable auto power off. With added capabilities like True RMS and 20-400Hz frequency measurement, the 61-766 gives electricians a level of certainty when measuring circuits with ASDs. And for those who work with DC motors and circuits, the 61-768 is the right choice.

### 760 Series Common Features:

- Measures up to 660AAC
- TightSight™ bottom display
- Selectable audible voltage presence warning on all functions
- Tapered jaws with hook tip
- Max/min
- Inrush current
- Audible continuity
- Selectable auto power off
- Data hold
- Low battery indicator
- Includes leads, alligator clip and case
- CAT IV – 600V rating;  
CAT III – 1000V rating
- 2-year warranty



▶ 61-764



▶ 61-766 features:

- True RMS
- Capacitance
- Frequency measurement via clamp head
- 66AAC low range



▶ 61-768 features:

- 660A DC current measurements
- True RMS



Selectable audible and visual high voltage indication over 30V AC/DC across the leads on all functions (audible switch in battery compartment)

Contains all the capabilities of a full-function multimeter

One-touch backlight button for glowing green display illumination

Data hold button and offset thumb wheel for one-handed operation

Large numbers and symbols are easy to read

Patented backlit TightSight™ display for viewing in dark, bright or tight locations; Hinged rubber cover prevents display damage (field replaceable)

Tapered jaws with hook tip for tight locations and easy wire separation

## Safety First!

The complete line of industrial clamps from IDEAL was designed to set a new standard for safety technology. It starts with the revolutionary TightSight™ display. It allows an electrician to keep his head and face out of potentially dangerous panels while viewing the measurement. The high voltage indicator is another feature not to be taken for granted. It indicates the presence of voltage even with the dial set to the wrong function. The CAT III and IV ratings, rugged construction and UL listing should give every electrician the confidence to go about the job without worrying about equipment safety.

| Description  | Cat No. |
|--|---------|
| 660AAC   | 61-764  |
| 660AAC w/TRMS, Capacitance, Frequency, 66AAC Low Range | 61-766  |
| 660AAC w/TRMS, DC Current                              | 61-768  |
| 1000AAC w/TRMS   | 61-772  |
| 1000AAC w/TRMS, DC Current, Capacitance                | 61-774  |
| Industrial Test Lead Kit                               | TL-435  |

| 760 Series  | Range & Resolution                         |  |         | Accuracy |
|-------------|--|--|---------|----------|
|             | 61-764                                     | 61-766   | 61-768  |          |
| AC Current  | 66.00/660.0 A                              |  | 660.0 A | 1.7%     |
| DC Current  | –  | –  | 660.0 A | 1.5%     |
| AC Voltage  | 660m/6.600/66.00/660.0/750 V               |  |         | 1.2%     |
| DC Voltage  | 660m/6.600/66.00/660.0/1000 V              |  |         | 0.5%     |
| Resistance  | 660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω |  |         | 1.0%     |
| Capacitance | –  | 6.600μ/66.00μ/660.0μ F   | –       | 3.0%     |
| Frequency   | –  | 20 - 400 Hz<br>Sensitivity: ≥5A for 20-100 Hz<br>≥10A for 100-400 Hz | –       | 0.1%     |


Jaw Size 1.42" (36 mm)

| 770 Series  | Range & Resolution                         |                        | Accuracy |
|-------------|--|------------------------|----------|
|             | 61-772                                     | 61-774                 |          |
| AC Current  | 660.0/1000 A                               |                        | 1.7%     |
| DC Current  | –  | 660.0/1000 A           | 1.5%     |
| AC Voltage  | 660m/6.600/66.00/660.0/750 V               |                        | 1.2%     |
| DC Voltage  | 660m/6.600/66.00/660.0/1000 V              |                        | 0.5%     |
| Resistance  | 660.0/6.600k/66.00k/660.0k/4.000M/10.00M Ω |                        | 1.0%     |
| Capacitance | –  | 6.600μ/66.00μ/660.0μ F | 3.0%     |

Jaw Size 2" (51 mm)



# 600 Amp Clamp Meters

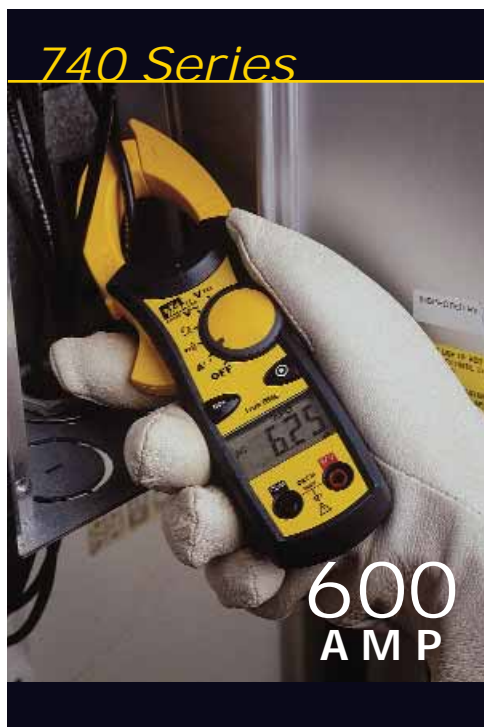

For electricians looking for a dependable, affordable 600A clamp meter, it's tough to beat the IDEAL 740 Series. From a non-contact voltage indicator at the tip of the jaws, to a large easy-to-read display, the 740 Series clamps make current measurements simple and reliable. The compact frame fits comfortably in the hand and makes it convenient in tight panels. And for those working in harmonic environments, the 61-746 features True RMS measurements.

## 740 Series Common Features:

- Measures up to 600AAC
- Non-contact voltage indicator (70V-600VAC)
- Tapered jaws with hook tip
- Auto/manual ranging
- Data hold
- Auto power off
- Low battery indicator
- Includes leads and case
- CAT III – 600V rating
- 2-year warranty



▶ 61-744



▶ 61-746 features:

- True RMS

| Description                    | Cat No. |
|--------------------------------|---------|
| 600AAC Clamp Meter w/NCV       | 61-744  |
| 600AAC Clamp Meter w/NCV, TRMS | 61-746  |

| 740 Series | Range & Resolution<br>61-744 & 61-746         | Accuracy |
|------------|---|----------|
| AC Current | 40.00/400.0/600A                              | 1.7%     |
| AC Voltage | 400.0/600 V                                   | 1.2%     |
| DC Voltage | 400.0/600 V                                   | 0.5%     |
| Resistance | 400.0/4.000k/40.00k<br>400.0k/4.000M/40.00M Ω | 1.0%     |

Jaw Size 1.25" (32 mm)

Tapered jaws with hook tip for easy wire separation

Convenient one-touch non-contact voltage indication

Data hold button conveniently located for thumb

Auto/manual ranging

Easy-to-read large numbers and symbols



## IDEAL INDUSTRIES, INC.

Technical Hotline / 877-201-9005

Becker Place, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA

International offices:

Australia • Brazil • Canada • China • Germany • Mexico • Puerto Rico • UK

For complete sales office contact information, visit us at:

[www.idealindustries.com](http://www.idealindustries.com) • [www.testersandmeters.com](http://www.testersandmeters.com)

Rev. 12/07  
Printed in U.S.A.



N12966

Form No. P-2517  
©2007 IDEAL INDUSTRIES, INC.