



Decorator Devices Wide Slide Series


Pass & Seymour




Full-On Bypass

When the dimmer is placed in the full-On position, the dimming circuitry is bypassed by latching contacts. This feature allows for 100% lighting output and extends dimmer life by eliminating heat build-up.

| Features | |
|---|---|
| <ul style="list-style-type: none"> Maximum ratings are for continuous full load. Many 1000W models fit standard Decorator plates. RFI suppression built in. Full-On bypass. | <ul style="list-style-type: none"> Preset "ON/OFF" switch automatically returns controlled lights to preset level without readjusting dimmer setting. 600W maximum rated dimmers can be ganged without de-rating. |



P 90680 **P** 90683
N 90681



P 91180 **P** 91183
N 91181

P = Preset
N = Non-Preset


| Catalog Number | | Description | Ratings | Color |
|---|--|-------------|--------------------|--|
| Single Pole | Three-Way | | | |
| 600W Incandescent Specification Grade Slide Dimmers | | | | |
| 90680I* 90680W* 90680GRY 90680LA* | 90683I* 90683W* 90683GRY 90683LA* | Preset | 120V 600W max. | Ivory White Gray Light Almond |
| 90681I* 90681W* 90681GRY 90681LA* | | Non-Preset | 120V 600W max. | Ivory White Gray Light Almond |
| 1000W Incandescent Specification Grade Slide Dimmers | | | | |
| 91180I 91180W 91180GRY 91180LA | 91183I 91183W 91183GRY 91183LA | Preset | 120V 1000W max. | Ivory White Gray Light Almond |
| 91181I 91181W 91181LA | | Non-Preset | 120V 1000W max. | Ivory White Light Almond |

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 90680IV.

| Max. Load Rating | Fins Removed | |
|------------------------|--------------|----------|
| | One Side | Two Side |
| De-Rating Chart | | |
| 1000W | 800W | 700W |

Note: Each side removed reduces plate size by 3/8".

Slide Dimmer 3-Way Wiring Diagram

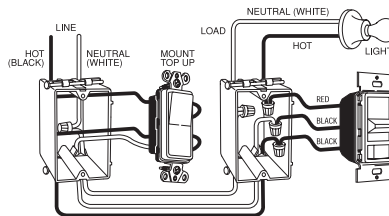



Decorator Devices Wide Slide Series


Pass & Seymour




Full-On Bypass

When the dimmer is placed in the full-On position, the dimming circuitry is bypassed by latching contacts. This feature allows for 100% lighting output and extends dimmer life by eliminating heat build-up.

| Features | |
|---|---|
| <ul style="list-style-type: none"> Maximum ratings are for continuous full load. Many 1000W models fit standard Decorator plates. RFI suppression built in. Full-On bypass. | <ul style="list-style-type: none"> Preset "ON/OFF" switch automatically returns controlled lights to preset level without readjusting dimmer setting. 600W maximum rated dimmers can be ganged without de-rating. |



P 90680 P 90683
N 90681



P 91180 P 91183
N 91181

P = Preset
N = Non-Preset

| Catalog Number | | Description | Ratings | Color |
|---|--|-------------|--------------------|--|
| Single Pole | Three-Way | | | |
| 600W Incandescent Specification Grade Slide Dimmers | | | | |
| 90680I* 90680W* 90680GRY 90680LA* | 90683I* 90683W* 90683GRY 90683LA* | Preset | 120V 600W max. | Ivory White Gray Light Almond |
| 90681I* 90681W* 90681GRY 90681LA* | | Non-Preset | 120V 600W max. | Ivory White Gray Light Almond |
| 1000W Incandescent Specification Grade Slide Dimmers | | | | |
| 91180I 91180W 91180GRY 91180LA | 91183I 91183W 91183GRY 91183LA | Preset | 120V 1000W max. | Ivory White Gray Light Almond |
| 91181I 91181W 91181LA | | Non-Preset | 120V 1000W max. | Ivory White Light Almond |

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 90680IV.

| Max. Load Rating | Fins Removed | |
|------------------------|--------------|----------|
| | One Side | Two Side |
| De-Rating Chart | | |
| 1000W | 800W | 700W |

Note: Each side removed reduces plate size by 3/8".

Slide Dimmer 3-Way Wiring Diagram

