


## SINGLE-USE WIRE GRABBER™


Continued

### SU 500 MCM

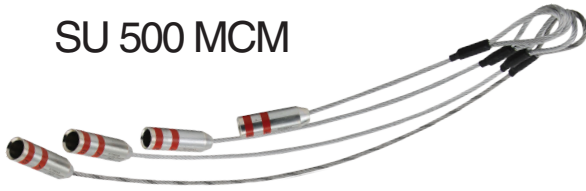


| Code  | Description               | Qty. |
|-------|---------------------------|------|
| 98173 | SU500MCM 14" wire lanyard | 6    |
| 98174 | SU500MCM 21" wire lanyard | 6    |
| 98175 | SU500MCM 28" wire lanyard | 6    |
| 98176 | SU500MCM 35" wire lanyard | 6    |

### SU 600 MCM

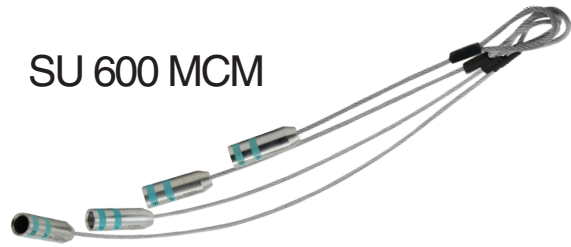

| Code  | Description               | Qty. |
|-------|---------------------------|------|
| 98177 | SU600MCM 14" wire lanyard | 6    |
| 98178 | SU600MCM 21" wire lanyard | 6    |
| 98179 | SU600MCM 28" wire lanyard | 6    |
| 98180 | SU600MCM 35" wire lanyard | 6    |

### SU 750 MCM

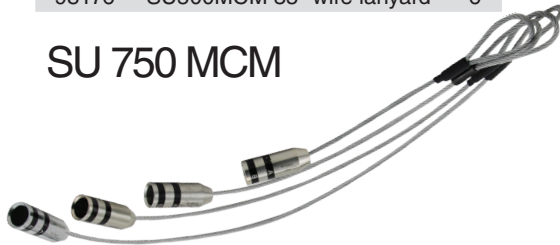

| Code  | Description               | Qty. |
|-------|---------------------------|------|
| 98181 | SU750MCM 14" wire lanyard | 6    |
| 98182 | SU750MCM 21" wire lanyard | 6    |
| 98183 | SU750MCM 28" wire lanyard | 6    |
| 98184 | SU750MCM 35" wire lanyard | 6    |

### SU 1000 MCM



| Code  | Description                | Qty. |
|-------|----------------------------|------|
| 98185 | SU1000MCM 14" wire lanyard | 6    |
| 98186 | SU1000MCM 21" wire lanyard | 6    |
| 98187 | SU1000MCM 28" wire lanyard | 6    |
| 98188 | SU1000MCM 35" wire lanyard | 6    |

## SINGLE-USE WIRE GRABBER™ LOAD CHART

| WIRE GRABBER™ SPECIFICATIONS FOR COPPER & ALUMINUM WIRE |           |                |            |                         |                         |                               |         |         |         |         |   |
|---|-----------|----------------|------------|-------------------------|-------------------------|-------------------------------|---------|---------|---------|---------|---|
| Single-Use Wire Grabber™                                | Wire Size | Max Load (lbs) |            | Min conductor dia. (in) | Max conductor dia. (in) | Minimum EMT Conduit Size (in) |         |         |         |         | Crimper                                     |
|   |           | One Tool       | Five Tools |                         |                         | 1 Wire                        | 2 Wires | 3 Wires | 4 Wires | 5 Wires |   |
| SU 8  | 8 AWG     | 130            | 650        | 0.134                   | 0.146                   | -                             | -       | -       | -       | -       | 12 to 15 ton Die Crimper or Dieless Crimper |
| SU 6  | 6 AWG     | 210            | 1050       | 0.169                   | 0.184                   | -                             | -       | -       | -       | -       |   |
| SU 4  | 4 AWG     | 300            | 1500       | 0.213                   | 0.232                   | -                             | -       | -       | -       | -       |   |
| SU 3  | 3 AWG     | 400            | 2000       | 0.238                   | 0.260                   | -                             | -       | -       | -       | -       |   |
| SU 2  | 2 AWG     | 500            | 2500       | 0.268                   | 0.292                   | -                             | -       | -       | -       | -       |   |
| SU 1  | 1 AWG     | 669            | 3345       | 0.299                   | 0.332                   | -                             | -       | -       | -       | -       |   |
| SU 1/0  | 1/0 AWG   | 844            | 4220       | 0.336                   | 0.373                   | 1                             | 1-¼     | 1-¼     | 1-½     | 2       |   |
| SU 2/0  | 2/0 AWG   | 1000           | 5000       | 0.376                   | 0.419                   | 1                             | 1-¼     | 1-½     | 2       | 2       |   |
| SU 3/0  | 3/0 AWG   | 1250           | 6250       | 0.423                   | 0.470                   | 1                             | 1-½     | 1-½     | 2       | 2-½     |   |
| SU 4/0  | 4/0 AWG   | 1650           | 8250       | 0.475                   | 0.528                   | 1-¼                           | 1-½     | 2       | 2       | 2-½     |   |
| SU 250  | 250 MCM   | 2000           | 10000      | 0.520                   | 0.575                   | 1-¼                           | 2       | 2       | 2-½     | 2-½     |   |
| SU 300  | 300 MCM   | 2400           | 12000      | 0.570                   | 0.631                   | 1-¼                           | 2       | 2       | 2-½     | 2-½     |   |
| SU 350  | 350 MCM   | 2400           | 12000      | 0.616                   | 0.681                   | 1-½                           | 2       | 2-½     | 2-½     | 3       |   |
| SU 400  | 400 MCM   | 2400           | 12000      | 0.659                   | 0.728                   | 1-½                           | 2-½     | 2-½     | 2-½     | 3       |   |
| SU 500  | 500 MCM   | 4000           | 20000      | 0.736                   | 0.813                   | 1-½                           | 2-½     | 2-½     | 3       | 3-½     |   |
| SU 600  | 600 MCM   | 4200           | 21000      | 0.813                   | 0.893                   | 2                             | 2-½     | 3       | 3       | 3-½     |   |
| SU 750  | 750 MCM   | 4300           | 21500      | 0.908                   | 0.998                   | 2                             | 3       | 3       | 3-½     | 4       |   |
| SU 1000   | 1000 MCM  | 5000           | 25000      | 1.060                   | 1.153                   | 2                             | 3       | 3-½     | 4       | 4-½     | 15 ton Die Crimper                          |


For use on THHN & XHHN copper & aluminum wire only.

\*May require special service (such as removing bushing and installing extra guide pulleys) when pulling Max diameter wires through Min size conduit.

## SINGLE-USE WIRE GRABBER™


Continued

### SU 500 MCM

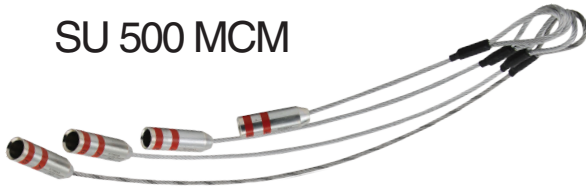


| Code  | Description               | Qty. |
|-------|---------------------------|------|
| 98173 | SU500MCM 14" wire lanyard | 6    |
| 98174 | SU500MCM 21" wire lanyard | 6    |
| 98175 | SU500MCM 28" wire lanyard | 6    |
| 98176 | SU500MCM 35" wire lanyard | 6    |

### SU 600 MCM

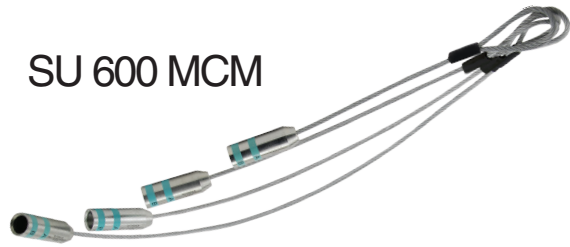

| Code  | Description               | Qty. |
|-------|---------------------------|------|
| 98177 | SU600MCM 14" wire lanyard | 6    |
| 98178 | SU600MCM 21" wire lanyard | 6    |
| 98179 | SU600MCM 28" wire lanyard | 6    |
| 98180 | SU600MCM 35" wire lanyard | 6    |

### SU 750 MCM

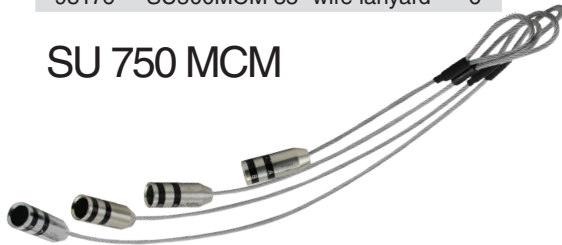

| Code  | Description               | Qty. |
|-------|---------------------------|------|
| 98181 | SU750MCM 14" wire lanyard | 6    |
| 98182 | SU750MCM 21" wire lanyard | 6    |
| 98183 | SU750MCM 28" wire lanyard | 6    |
| 98184 | SU750MCM 35" wire lanyard | 6    |

### SU 1000 MCM



| Code  | Description                | Qty. |
|-------|----------------------------|------|
| 98185 | SU1000MCM 14" wire lanyard | 6    |
| 98186 | SU1000MCM 21" wire lanyard | 6    |
| 98187 | SU1000MCM 28" wire lanyard | 6    |
| 98188 | SU1000MCM 35" wire lanyard | 6    |

## SINGLE-USE WIRE GRABBER™ LOAD CHART

| WIRE GRABBER™ SPECIFICATIONS FOR COPPER & ALUMINUM WIRE |           |                |            |                         |                         |                               |         |         |         |         |   |
|---|-----------|----------------|------------|-------------------------|-------------------------|-------------------------------|---------|---------|---------|---------|---|
| Single-Use Wire Grabber™                                | Wire Size | Max Load (lbs) |            | Min conductor dia. (in) | Max conductor dia. (in) | Minimum EMT Conduit Size (in) |         |         |         |         | Crimper                                     |
|   |           | One Tool       | Five Tools |                         |                         | 1 Wire                        | 2 Wires | 3 Wires | 4 Wires | 5 Wires |   |
| SU 8  | 8 AWG     | 130            | 650        | 0.134                   | 0.146                   | -                             | -       | -       | -       | -       | 12 to 15 ton Die Crimper or Dieless Crimper |
| SU 6  | 6 AWG     | 210            | 1050       | 0.169                   | 0.184                   | -                             | -       | -       | -       | -       |   |
| SU 4  | 4 AWG     | 300            | 1500       | 0.213                   | 0.232                   | -                             | -       | -       | -       | -       |   |
| SU 3  | 3 AWG     | 400            | 2000       | 0.238                   | 0.260                   | -                             | -       | -       | -       | -       |   |
| SU 2  | 2 AWG     | 500            | 2500       | 0.268                   | 0.292                   | -                             | -       | -       | -       | -       |   |
| SU 1  | 1 AWG     | 669            | 3345       | 0.299                   | 0.332                   | -                             | -       | -       | -       | -       |   |
| SU 1/0  | 1/0 AWG   | 844            | 4220       | 0.336                   | 0.373                   | 1                             | 1-¼     | 1-¼     | 1-½     | 2       |   |
| SU 2/0  | 2/0 AWG   | 1000           | 5000       | 0.376                   | 0.419                   | 1                             | 1-¼     | 1-½     | 2       | 2       |   |
| SU 3/0  | 3/0 AWG   | 1250           | 6250       | 0.423                   | 0.470                   | 1                             | 1-½     | 1-½     | 2       | 2-½     |   |
| SU 4/0  | 4/0 AWG   | 1650           | 8250       | 0.475                   | 0.528                   | 1-¼                           | 1-½     | 2       | 2       | 2-½     |   |
| SU 250  | 250 MCM   | 2000           | 10000      | 0.520                   | 0.575                   | 1-¼                           | 2       | 2       | 2-½     | 2-½     |   |
| SU 300  | 300 MCM   | 2400           | 12000      | 0.570                   | 0.631                   | 1-¼                           | 2       | 2       | 2-½     | 2-½     |   |
| SU 350  | 350 MCM   | 2400           | 12000      | 0.616                   | 0.681                   | 1-½                           | 2       | 2-½     | 2-½     | 3       |   |
| SU 400  | 400 MCM   | 2400           | 12000      | 0.659                   | 0.728                   | 1-½                           | 2-½     | 2-½     | 2-½     | 3       |   |
| SU 500  | 500 MCM   | 4000           | 20000      | 0.736                   | 0.813                   | 1-½                           | 2-½     | 2-½     | 3       | 3-½     |   |
| SU 600  | 600 MCM   | 4200           | 21000      | 0.813                   | 0.893                   | 2                             | 2-½     | 3       | 3       | 3-½     |   |
| SU 750  | 750 MCM   | 4300           | 21500      | 0.908                   | 0.998                   | 2                             | 3       | 3       | 3-½     | 4       |   |
| SU 1000   | 1000 MCM  | 5000           | 25000      | 1.060                   | 1.153                   | 2                             | 3       | 3-½     | 4       | 4-½     | 15 ton Die Crimper                          |

For use on THHN & XHHN copper & aluminum wire only.

\*May require special service (such as removing bushing and installing extra guide pulleys) when pulling Max diameter wires through Min size conduit.