
B36IC


6" Slope IC Housing

Catalog Number:	
Project Name:	
Note:	**Type:**

LAMP WATTAGE: (1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30

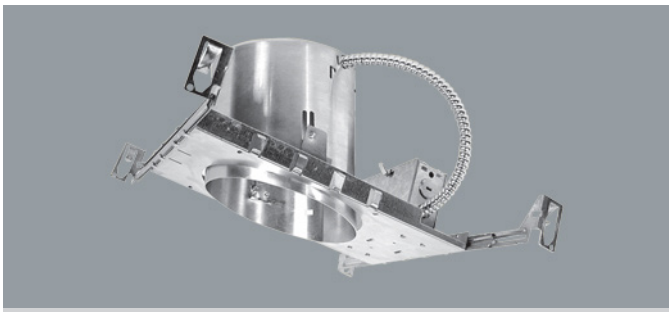

DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

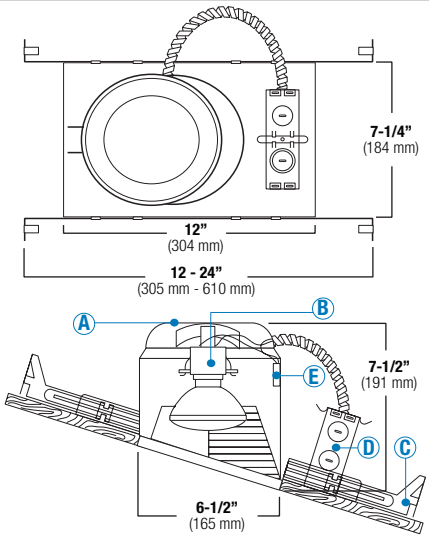

SAME DAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

DESCRIPTION

New construction, thermally protected, IC rated specification grade recessed housing. Designed for sloped ceiling applications where the ceiling pitch ranges from 2/12 to 6/12. Accommodates up to 75W PAR30, R30 lamps, 60W A19 lamps and 65W BR30 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four ½" KOs, one ¾" KO and four Romex knockouts with strain relief.

SPECIFICATION


A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate ½" to 1-3/8" ceilings.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on a mounting bracket is specially designed to swivel and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. Integral bar hanger nailers are designed to be hammered directly into the joist without additional nails or screws and makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

D. JUNCTION BOX - through-branch cir-cuit wiring and has four ½" KOs, one ¾" KO and four Ro-mex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protec-tion device guards against improper installation, over-lamping and misuse of insulation material.

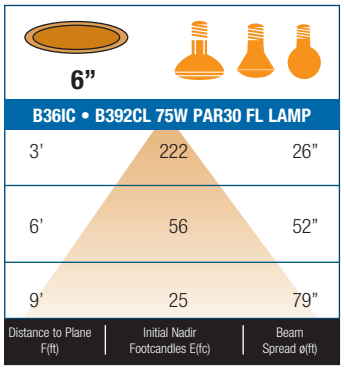

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES

- Thermally Protected IC housing.
- The socket bracket is specially designed to swivel and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.
- Adjustable socket bracket with a slope indicator provides consistent lamp alignment and setup.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 7-½" height allows use in 2" x 8" joist construction.
- Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.

OPTIONS

AIR-SHUT

- **Gasket to prevent air flow from heated or air conditioned spaces.**
- **Meets all national air flow requirements.**

ITEM SELECTOR: (Please check the boxes below for the option desired)

TYPE	AIR-SHUT	TRIM TYPE	BAFFLE	REFLECTOR	TRIM/RING
B36IC	☐ AT	☐ B391	☐ W	☐ CL	☐ WH
		☐ B392	☐ P	☐ RG	☐ BK
		☐ B602	☐ SN	☐ W	☐ SN
		☐ B646	☐ CP	☐ MB	☐ CP
		☐ B663	☐ BZ	☐ BZ	☐ CH
		☐ B673		☐ CP	☐ PB
		☐ B601		☐ SN	☐ BZ
		☐ B601L		☐ SHZ	
		☐ B605			
		☐ B605L			

Specifications:

B36IC _____ - _____ - _____ - _____ - _____ - _____ - _____

AIR-SHUT | OPTION | TRIM TYPE | BAFFLE | REFLECTOR | TRIM/RING | GLASS

BAFFLE		REFLECTOR		TRIM/RING	
W	White	**CL**	Chrome	**WH**	White
P	Black	**RG**	Gold	**BK**	Black
SN	Satin Nickel	**W**	White	**SN**	Satin Nickel
CP	Copper	**MB**	Black	**CP**	Copper
BZ	Bronze	**BZ**	Bronze	**CH**	Chrome
		CP	Copper	**PB**	Polish Brass
		SN	Satin Nickel	**BZ**	Bronze
		SHZ	Satin Haze		

Sample of Catalog Number: **B36IC-AT-B391-W-WH**

**For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.*

6” Slope Ceiling Incandescent Trims

(LAMP WATTAGE: **(1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30**)


Catalog Number:	
Project Name:	
Note:	**Type:**

B391CP-CP
METAL STEPPED BAFFLE R30/PAR30




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B394P-WH
PAR38/R40 STEPPED BAFFLE



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B392CL-WH
R30/PAR30 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B395CP-WH
R38/PAR40 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B601CP
METAL ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B601L
PLASTIC ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WHITE PLASTIC




B605PB
METAL FRESNEL LENS



LENS:
FRESNEL

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B605L
PLASTIC FRESNEL LENS



LENS:
FRESNEL


TRIM/RING FINISH:
WHITE PLASTIC




B663PB
PAR30 GIMBAL RING



TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B673P-OV
PAR30 BAFFLE W/ GIMBAL RING



BAFFLE FINISH:
W, P, SN, CP

TRIM/RING FINISH:
WH



BAFFLE		REFLECTOR		TRIM RING	
W	White	**CL**	Chrome	**WH**	White
P	Black	**RG**	Gold	**BK**	Black
SN	Satin Nickel	**W**	White	**SN**	Satin Nickel
CP	Copper	**MB**	Black	**CP**	Copper
BZ	Bronze	**CP**	Copper	**CH**	Chrome
		SN	Satin Nickel	**PB**	Polish Brass
				BZ	Bronze


**For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.*

B36IC


6" Slope IC Housing

Catalog Number:	
Project Name:	
Note:	**Type:**

LAMP WATTAGE: (1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30

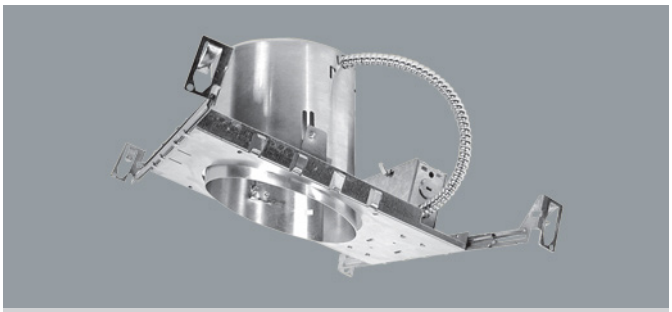

DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

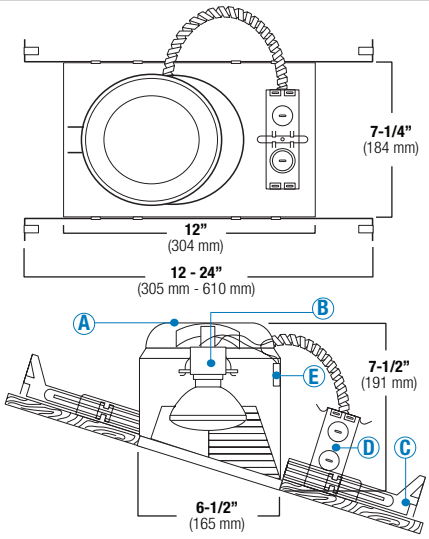

SAME DAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

DESCRIPTION

New construction, thermally protected, IC rated specification grade recessed housing. Designed for sloped ceiling applications where the ceiling pitch ranges from 2/12 to 6/12. Accommodates up to 75W PAR30, R30 lamps, 60W A19 lamps and 65W BR30 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four ½" KOs, one ¾" KO and four Romex knockouts with strain relief.

SPECIFICATION


A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate ½" to 1-3/8" ceilings.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on a mounting bracket is specially designed to swivel and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. Integral bar hanger nailers are designed to be hammered directly into the joist without additional nails or screws and makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

D. JUNCTION BOX - through-branch cir-cuit wiring and has four ½" KOs, one ¾" KO and four Ro-mex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protec-tion device guards against improper installation, over-lamping and misuse of insulation material.

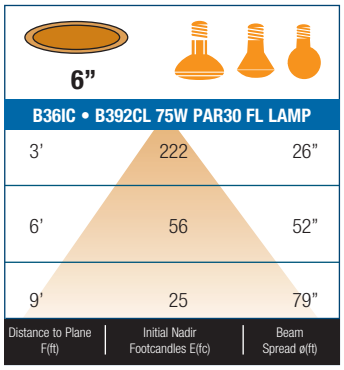

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES

- Thermally Protected IC housing.
- The socket bracket is specially designed to swivel and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.
- Adjustable socket bracket with a slope indicator provides consistent lamp alignment and setup.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 7-½" height allows use in 2" x 8" joist construction.
- Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.

OPTIONS

AIR-SHUT

- **Gasket to prevent air flow from heated or air conditioned spaces.**
- **Meets all national air flow requirements.**

ITEM SELECTOR: (Please check the boxes below for the option desired)

TYPE	AIR-SHUT	TRIM TYPE	BAFFLE	REFLECTOR	TRIM/RING
B36IC	☐ AT	☐ B391	☐ W	☐ CL	☐ WH
		☐ B392	☐ P	☐ RG	☐ BK
		☐ B602	☐ SN	☐ W	☐ SN
		☐ B646	☐ CP	☐ MB	☐ CP
		☐ B663	☐ BZ	☐ BZ	☐ CH
		☐ B673		☐ CP	☐ PB
		☐ B601		☐ SN	☐ BZ
		☐ B601L		☐ SHZ	
		☐ B605			
		☐ B605L			

Specifications:

B36IC _____ - _____ - _____ - _____ - _____ - _____ - _____

AIR-SHUT | OPTION | TRIM TYPE | BAFFLE | REFLECTOR | TRIM/RING | GLASS

BAFFLE		REFLECTOR		TRIM/RING	
W	White	**CL**	Chrome	**WH**	White
P	Black	**RG**	Gold	**BK**	Black
SN	Satin Nickel	**W**	White	**SN**	Satin Nickel
CP	Copper	**MB**	Black	**CP**	Copper
BZ	Bronze	**BZ**	Bronze	**CH**	Chrome
		CP	Copper	**PB**	Polish Brass
		SN	Satin Nickel	**BZ**	Bronze
		SHZ	Satin Haze		

Sample of Catalog Number: **B36IC-AT-B391-W-WH**

**For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.*

6” Slope Ceiling Incandescent Trims

(LAMP WATTAGE: **(1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30**)


Catalog Number:	
Project Name:	
Note:	**Type:**

B391CP-CP
METAL STEPPED BAFFLE R30/PAR30




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B394P-WH
PAR38/R40 STEPPED BAFFLE



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B392CL-WH
R30/PAR30 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B395CP-WH
R38/PAR40 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B601CP
METAL ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B601L
PLASTIC ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WHITE PLASTIC




B605PB
METAL FRESNEL LENS



LENS:
FRESNEL

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B605L
PLASTIC FRESNEL LENS



LENS:
FRESNEL


TRIM/RING FINISH:
WHITE PLASTIC




B663PB
PAR30 GIMBAL RING



TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B673P-OV
PAR30 BAFFLE W/ GIMBAL RING



BAFFLE FINISH:
W, P, SN, CP

TRIM/RING FINISH:
WH



BAFFLE		REFLECTOR		TRIM RING	
W	White	**CL**	Chrome	**WH**	White
P	Black	**RG**	Gold	**BK**	Black
SN	Satin Nickel	**W**	White	**SN**	Satin Nickel
CP	Copper	**MB**	Black	**CP**	Copper
BZ	Bronze	**CP**	Copper	**CH**	Chrome
		SN	Satin Nickel	**PB**	Polish Brass
				BZ	Bronze

**For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.*