

- Supports low voltage communication cables from beams or rods when used with other fasteners.
- Ultimate Static Load Capacity: 50 Lbs.
- Finish: Zinc Plated.

## Threaded Bridle Rings




| UPC/Part Number | Catalog Number  | Ring Size | Thread Size x Thread Length | Box Qty. |
|-----------------|-----------------|-----------|-----------------------------|----------|
| 78101119550     | <b>BR-8-T</b>   | 1/2"      | #10-24 x 9/16"              | 100      |
| 78101119555     | <b>BR-12-T</b>  | 3/4"      | #10-24 x 9/16"              | 100      |
| 78101119560     | <b>BR-20-T</b>  | 1 1/4"    | #10-24 x 9/16"              | 100      |
| 78101119570     | <b>BR-32-T</b>  | 2"        | #10-24 x 9/16"              | 100      |
| 78101119565     | <b>BR-20-4T</b> | 1 1/4"    | 1/4"-20 x 9/16"             | 100      |
| 78101119575     | <b>BR-32-4T</b> | 2"        | 1/4"-20 x 9/16"             | 100      |
| 78101119889     | <b>BR-64-4T</b> | 4"        | 1/4"-20 x 9/16"             | 50       |



Lag Screw for Wood Beams

| UPC/Part Number | Catalog Number  | Ring Size | Thread Size x Thread Length | Box Qty. |
|-----------------|-----------------|-----------|-----------------------------|----------|
| 78101119875     | <b>BR-16-3W</b> | 1"        | #10 x 9/16"                 | 100      |
| 78101119886     | <b>BR-24-4W</b> | 1 1/2"    | 1/4" x 27/32"               | 100      |
| 78101119876     | <b>BR-32-4W</b> | 2"        | 1/4" x 7/8"                 | 100      |

Read safety/installation instruction sheets in packages before use.

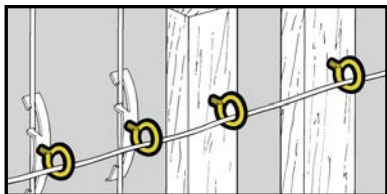

- Supports low voltage communication cables from beams or rods when used with other fasteners.
- Ultimate Static Load Capacity: 50 Lbs.
- Finish: Zinc Plated.

## Threaded Bridle Rings



| UPC/Part Number | Catalog Number  | Ring Size | Thread Size x Thread Length | Box Qty. |
|-----------------|-----------------|-----------|-----------------------------|----------|
| 78101119550     | <b>BR-8-T</b>   | 1/2"      | #10-24 x 9/16"              | 100      |
| 78101119555     | <b>BR-12-T</b>  | 3/4"      | #10-24 x 9/16"              | 100      |
| 78101119560     | <b>BR-20-T</b>  | 1 1/4"    | #10-24 x 9/16"              | 100      |
| 78101119570     | <b>BR-32-T</b>  | 2"        | #10-24 x 9/16"              | 100      |
| 78101119565     | <b>BR-20-4T</b> | 1 1/4"    | 1/4"-20 x 9/16"             | 100      |
| 78101119575     | <b>BR-32-4T</b> | 2"        | 1/4"-20 x 9/16"             | 100      |
| 78101119889     | <b>BR-64-4T</b> | 4"        | 1/4"-20 x 9/16"             | 50       |



Lag Screw for Wood Beams

| UPC/Part Number | Catalog Number  | Ring Size | Thread Size x Thread Length | Box Qty. |
|-----------------|-----------------|-----------|-----------------------------|----------|
| 78101119875     | <b>BR-16-3W</b> | 1"        | #10 x 9/16"                 | 100      |
| 78101119886     | <b>BR-24-4W</b> | 1 1/2"    | 1/4" x 27/32"               | 100      |
| 78101119876     | <b>BR-32-4W</b> | 2"        | 1/4" x 7/8"                 | 100      |

Read safety/installation instruction sheets in packages before use.