

Rigid/Intermediate Grade Conduit Fittings

Compression Fittings – Type CPR

TYPE CPR COMPRESSION FITTINGS

Applications:

Use type CPR compression fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:


- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of
- Concrete tight
- Threadless

Certifications and Compliances:

- UL/cUL Listed
- UL514B Fittings for Conduit and Outlet Boxes


Standard Materials:

- Bodies – malleable iron
- Compression nuts – iron
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – nylon

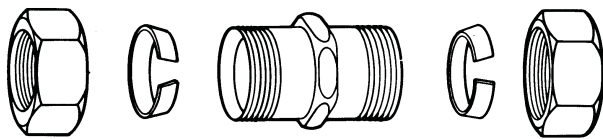

Straight Connectors – Non-insulated


UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR1 | 1/2" | 50 | 19 |
| CPR2 | 3/4" | 25 | 23 |
| CPR3 | 1" | 10 | 42 |
| CPR4 | 1 1/4" | 10 | 64 |
| CPR5 | 1 1/2" | 5 | 87 |
| CPR6 | 2" | 5 | 113 |
| CPR7 | 2 1/2" | 2 | 130 |
| CPR8 | 3" | 1 | 220 |
| CPR9 | 3 1/2" | 1 | 280 |
| CPR10 | 4" | 1 | 320 |

Couplings

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR21 | 1/2" | 25 | 26 |
| CPR22 | 3/4" | 20 | 38 |
| CPR23 | 1" | 10 | 59 |
| CPR24 | 1 1/4" | 5 | 85 |
| CPR25 | 1 1/2" | 5 | 124 |
| CPR26 | 2" | 2 | 162 |
| CPR27 | 2 1/2" | 2 | 220 |
| CPR28 | 3" | 1 | 320 |
| CPR29 | 3 1/2" | 1 | 380 |
| CPR30 | 4" | 1 | 440 |

Straight Connectors – Insulated

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR11 | 1/2" | 50 | 19 |
| CPR12 | 3/4" | 25 | 23 |
| CPR13 | 1" | 10 | 42 |
| CPR14 | 1 1/4" | 10 | 64 |
| CPR15 | 1 1/2" | 5 | 87 |
| CPR16 | 2" | 5 | 113 |
| CPR17 | 2 1/2" | 2 | 130 |
| CPR18 | 3" | 1 | 220 |
| CPR19 | 3 1/2" | 1 | 280 |
| CPR20 | 4" | 1 | 320 |

Rigid/Intermediate Grade Conduit Fittings

Compression Fittings – Type CPR

TYPE CPR COMPRESSION FITTINGS

Applications:

Use type CPR compression fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:


- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of
- Concrete tight
- Threadless

Certifications and Compliances:

- UL/cUL Listed
- UL514B Fittings for Conduit and Outlet Boxes


Standard Materials:

- Bodies – malleable iron
- Compression nuts – iron
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – nylon

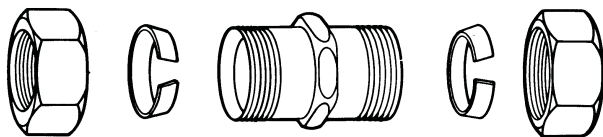

Straight Connectors – Non-insulated


UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR1 | 1/2" | 50 | 19 |
| CPR2 | 3/4" | 25 | 23 |
| CPR3 | 1" | 10 | 42 |
| CPR4 | 1 1/4" | 10 | 64 |
| CPR5 | 1 1/2" | 5 | 87 |
| CPR6 | 2" | 5 | 113 |
| CPR7 | 2 1/2" | 2 | 130 |
| CPR8 | 3" | 1 | 220 |
| CPR9 | 3 1/2" | 1 | 280 |
| CPR10 | 4" | 1 | 320 |

Couplings

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR21 | 1/2" | 25 | 26 |
| CPR22 | 3/4" | 20 | 38 |
| CPR23 | 1" | 10 | 59 |
| CPR24 | 1 1/4" | 5 | 85 |
| CPR25 | 1 1/2" | 5 | 124 |
| CPR26 | 2" | 2 | 162 |
| CPR27 | 2 1/2" | 2 | 220 |
| CPR28 | 3" | 1 | 320 |
| CPR29 | 3 1/2" | 1 | 380 |
| CPR30 | 4" | 1 | 440 |

Straight Connectors – Insulated

UL File No. E-19189



| Cat. # | Size | Unit Qty. | Wt. Lbs. Per 100 |
|--------|--------|-----------|------------------|
| CPR11 | 1/2" | 50 | 19 |
| CPR12 | 3/4" | 25 | 23 |
| CPR13 | 1" | 10 | 42 |
| CPR14 | 1 1/4" | 10 | 64 |
| CPR15 | 1 1/2" | 5 | 87 |
| CPR16 | 2" | 5 | 113 |
| CPR17 | 2 1/2" | 2 | 130 |
| CPR18 | 3" | 1 | 220 |
| CPR19 | 3 1/2" | 1 | 280 |
| CPR20 | 4" | 1 | 320 |