

Designed for highly accurate switching



Eaton E47 precision limit switches are an ideal cost-effective solution for applications requiring high switching accuracy. The switches have high-performance specifications for current capacity, operating force and travel characteristics. Output is rated up to 20A, so a direct circuit without relays can be designed. This allows less wiring and quicker installation, and reduces the number of components that could fail over time. The E47 is available with a wide variety of operator actuators, including lever, plunger and roller combination styles. For applications requiring actuator protection, the E47 is available enclosed in a rugged metal housing. With so many options, E47 precision limit switches are perfect for interacting with or customizing to your application, while providing an industry-leading service life.

Precise problem solver

With many different switch configurations, Eaton can provide solutions to the most demanding applications. The E47 offers operating forces from as low as 0.35 ounces to as high as 28.22 ounces and pre-travel limits as low as 0.016 of an inch.

The E47 has a wide variety of operating styles available to meet the application's requirements.

The E47 line includes:

- Pin plungers for maximum precision
- Adjustable levers that allow additional overtravel
- Different lever styles that provide additional overtravel and adjustability
- Highly polished rollers for applications requiring a smooth finish

Quality and support

Eaton quality, reliability and performance is apparent in the E47 limit switch family. The models are UL® recognized and CSA® certified and are backed by Eaton's world-class sensor application engineers, on call five days a week to provide assistance with specifying, installing, troubleshooting and servicing of Eaton limit switch products. For information, call 1-800-426-9184, ext. 1.

Target applications

- Agriculture machinery
- Vending machines
- Packaging machinery
- HVAC equipment
- Test instruments
- Semi trailer trucks
- Boom trucks
- Sliding gates
- Elevators


Key product features

- Compact housing is ideal for use where space is restricted
- Precision, snap-action operators provide accurate repeatability of electrical and mechanical operating characteristics
- High current capacity (up to 20A) allows power load switching and motor handling capability
- Enclosed booted versions shield actuators from debris
- Increased durability and conduit connection
- Screw and solder terminations as standard; customizable space terminal option available
- Terminal wire covers available with both a 45- and a 90-degree conduit interface

Approvals

- UL recognized
- CSA certified
- RoHS compliant

Terminal configurations

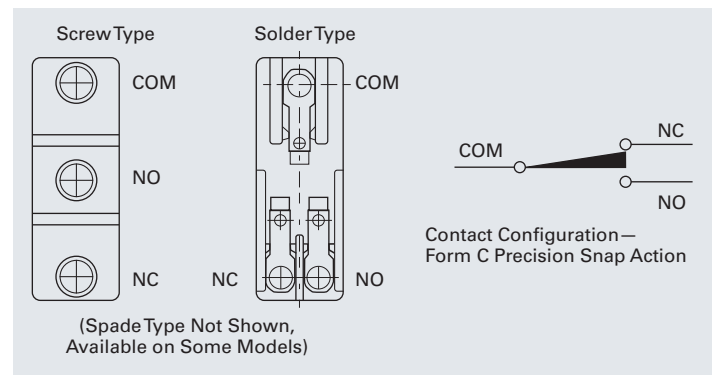

Specifications

Description	Specification
Operating speed	0.01 ms to 1 ms
Operating frequency	
Mechanical	120 operations per minute
Electrical	20 operations per minute
Mechanical life	3,000,000 operations minimum
Electrical life	500,000 operations minimum
Contact resistance	15M ohms maximum, initial
Insulation resistance	100M ohms minimum at 500 Vdc
Dielectric strength between non-current carrying parts	1000 Vac, 50/60 Hz for 1 minute
Between current carrying parts and ground	2000 Vac, 50/60 Hz for 1 minute
Ambient operating temperature	
Basic	-13° to 176°F (-25° to 80°C)
Enclosed	5° to 176°F (-15° to 80°C)
Environmental rating	
Enclosed, booted	NEMA® 1
Mounting centers	1.00 inch (25.4 mm), #8 screw size
Terminal screws	Bottom facing M4 x 0.7 (8-32)—screws with cup washers will accept 22-12 AWG (2.5 sq. mm maximum) Maximum torque: 10 in-lbs
Threaded bushing	15/32-inch
Construction material	Mineral-filled phenolic
Enclosure rating	Aluminum die casting (ADC-3/A380); seal boot—nitrile butyl rubber (NBR)
Conduit fitting on enclosed type	1/2-inch NPT

1 Inductive load has a power factor of 0.04 maximum (AC) and a time constant of 7m/second (DC).

Ratings

Model	Rated Voltage (V)	Non-Inductive Load (A)			Inductive Load (A)			Maximum Inrush Current (A)		
		Resistive Load		Lamp Load	Inductive Load		Motor Load		NC	NO
		NC and NO	NC	NO	NC and NO	NC	NO			
15A	125 Vac	15	3	1.5	15	5	2.5	30	15	
	250 Vac	15	2.5	1.25	15	3	1.5	30	15	
	500 Vac	3	1.5	0.75	2.5	1.5	0.75	30	15	
	8 Vdc	15	3	1.5	15	5	2.5	30	15	
	14 Vdc	15	3	1.5	10	5	2.5	30	15	
	30 Vdc	6 1	3	1.5	5	5	2.5	30	15	
	125 Vdc	0.4	0.4	0.4	0.05	0.05	0.05	30	15	
	250 Vdc	0.2	0.2	0.2	0.03	0.03	0.03	30	15	
20A	125 Vac	20	7.5	7.5	20	12.5	12.5	60	30	
	250 Vac	20	7.5	7.5	20	8.3	8.3	60	30	
	500 Vac	6	4	4	5	2	2	60	30	
	8 Vdc	20	3	1.5	20	12.5	12.5	60	30	
	14 Vdc	20	3	1.5	15	12.5	12.5	60	30	
	30 Vdc	6	3	1.5	5	5	5.00	60	30	
	125 Vdc	0.5	0.5	0.5	0.05	0.05	0.05	60	30	
	250 Vdc	0.25	0.25	0.25	0.03	0.03	0.03	60	30	

1 Lamp load has an inrush current of six times steady-state current.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2013 Eaton
All Rights Reserved
Printed in USA
Publication No. PA05207001E / Z13420
June 2013

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Powering Business Worldwide