

**Description**

The E71CATNB is a compact and efficient recessed housing optimized and listed for EISA compliant tungsten-halogen, CFL and LED lamps as well as incandescent. Housing is suitable for residential or light commercial applications. For installation in insulated ceilings\* and non-insulated ceilings with airtight code compliant construction. Use with a variety of trims and finishes to create different lighting effects or to match any decor. May be retrofit with compatible HALO LED lighting systems.

The E71CATNB can save installation time. It is designed without a socket plate for use with socket supporting trims only. With these trims there is no need to spend time removing the socket plate and the fixed lamp position of socket supporting trims saves on lamp adjustment time too.

|             |  |      |
|-------------|--|------|
| Catalog #   |  | Type |
| Project     |  |      |
| Comments    |  | Date |
| Prepared by |  |      |

**Specification Features**

**Housing**

- Single wall die-formed aluminum housing
- Housing features a precision rolled interlocking collar which maintains aperture geometry for greater assurance of installation results
- Integral gasket for code-required gasket between fixture and finished ceiling - seals aperture without need for additional caulk
- May be removed from the plaster frame to provide access to junction box

**Plaster Frame**

- Galvanized steel frame. Housing adjusts in plaster frame to accommodate up to 3/8" - 1" ceiling thickness.
- (2) Regressed locking screws for securing hanger bars
- Integral Air-Tite gasket seals housing and meets code-required gasket between fixture and finished ceiling

**Includes:**

**Bar Hangers  
All Nail!™**

- Integral precisely positioned nail for engineered and natural framing
- Mini-foot leveling flange
- Integral T-Grid Clip, no accessory clips required

**q-Channel bars with Pass-N-Thru™**

- Unique inverted "q" interlocking channel for rigidity and stability
- Pass-N-Thru™ feature allows bars to cross-over for tool-less shortening in tight spaces

**Hinged junction box w/  
Slide-N-Side™**

- (3) Slide-N-Side™ Non-Metallic (NM) wire traps, allow wiring outside the box
- For 14-2, 14-3, 12-2, 12-3 U.S. and 14-2, 14-3, 12-2 Canadian
- (4) 1/2" conduit pry-outs
- Hinged door for easy access
- Box is repositionable 90° on frame to avoid obstructions

**Quick Connect™**

- (3) Push wire nuts included, for speed & reliability
- Clear caps for wire connection visibility

**cULus Listed**

- Compact 16 in<sup>3</sup> volume
- Listed for max. (10) No. 12 AWG or (14) No. 14 AWG 90° C splice conductors in box

**Air-Tite™ code compliant**

- Certified under ASTM E283
- Exclusive gasket seals aperture, frame & ceiling
- No additional caulk required

**Socket**

- Porcelain socket with nickel plated brass screw shell
- Snap-in socket speeds installation and attaches directly to the trim for consistent lamp positioning

**Thermal Protector**

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

**Trims**

- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types including Halogen, CFL and LED

**Compliance**

- cULus Listed 1598 Luminaire
- cULus Listed Damp Location
- cULus Listed for Wet Location, covered ceiling, with select trims
- cULus Listed for direct contact with insulation and combustible material\*
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential
- RoHS compliant

\*Not to be used in direct contact with spray foam insulation (Consult NEMA LSD57-2013).



**E71CATNB**


**6" IC, Air-Tite,  
New Construction  
Housing, No Bracket**

**E26 Screw base housing**

**FOR USE IN INSULATED  
CEILINGS**

**FOR DIRECT CONTACT  
WITH INSULATION\***

**Dimensions**

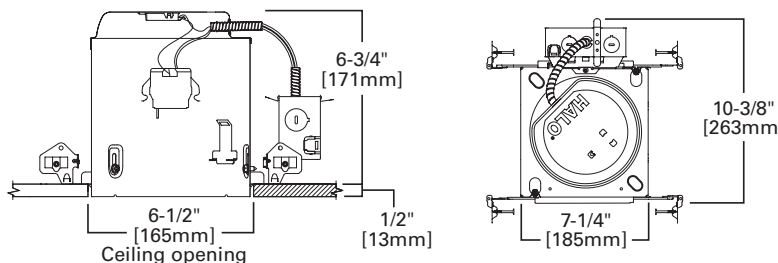

**Special Features**

- All-Nail!™ bar hangers
- q-Channel bars with Pass-N-Thru™
- Hinged J-Box with Slide-N-Side™
- Quick Connect™ push wire nuts
- Air-Tite™ code compliant

## Ordering Information

Sample Number: E71CATNB 6125WB

Order housing, trim and lamp (by others) separately for a complete luminaire.

### Housing

E71CATNB = 6" insulated ceiling, airtight recessed housing, new construction, no socket bracket, 120V

### Trims

#### Reflectors



#### 30 Reflector, Self-flange

OD: 7-1/4" [184mm]

30HAT=Haze Reflector, White Trim  
30RGAT=Residential Gold Reflector, White Trim  
30CAT=Clear Specular Reflector, White Trim



#### 30SBAT Reflector, Self-flange

OD: 7-1/4" [184mm]

30SBAT=Black Specular Reflector, Self-flange



#### 404 Specular Reflector

OD: 7-1/4" [184mm]

404C=Clear Specular Reflector, White Trim  
404H=Haze Reflector, White Trim  
404SN=Satin Nickel Reflector and Trim  
404TBZ=Tuscan Bronze Reflector and Trim



#### 4041 White Reflector, Self-flange

OD: 7-1/4" [184mm]

4041P=White Reflector and Trim



#### 6120 Full Cone Reflector, Self-flange

OD: 7-3/4" [197mm]

6120WH=White Reflector and Trim  
6120SN=Satin Nickel Reflector and Trim  
6120TBZ=Tuscan Bronze Reflector and Trim



#### 6121 Shallow Full Cone Reflector, Self-flange

OD: 7-3/4" [197mm]

6121WH=White Reflector and Trim

#### Baffles



#### 30 Baffle, Self-flange

OD: 7-1/4" [184mm]

30WAT=White Baffle, Reflector and Trim  
30WATH=White Baffle, Clear Reflector and White Trim  
30PAT=Black Baffle, Clear Reflector and White Trim  
30SNAT=Satin Nickel Baffle, Reflector and Trim  
30TBZAT=Tuscan Bronze Baffle, Reflector and Trim



#### 6125 Full Cone Baffle, Self-flange

OD: 7-3/4" [197mm]

6125WB=White Baffle and Trim  
6125BB=Black Baffle, White Trim  
6125BKBB=Black Baffle and Trim

#### Adjustable - Eyeballs & Gimbals



#### 74 PAR30 Eyeball 30° Tilt, Self-flange

OD: 8" [203mm]

74P=White Eyeball and Trim



#### 76 PAR38 Gimbal 30° Tilt, Self-flange

OD: 8" [203mm]

76P=White Gimbal and Trim



#### 78 BR/PAR30 Eyeball 30° Tilt, Self-flange

OD: 8" [203mm]

78P=White Eyeball and Trim  
78PAT=White Eyeball and Trim, Air-Tite  
78SN=Satin Nickel Eyeball and Trim  
78TBZ=Tuscan Bronze Eyeball and Trim



#### 376 PAR30 Regressed Gimbal 30° Tilt, Self-flange

OD: 7-1/4" [184mm]

376W=White Baffle and Trim  
376P=Black Baffle and White Trim



#### 378 PAR30 Regressed Gimbal with Splay 25° Tilt, Self-flange

OD: 7-1/4" [184mm]

378P=White Splay and Trim  
378=Clear Specular Splay and White Trim



#### 420 BR/PAR30 Regressed Eyeball 30° Tilt, Self-flange

OD: 7-1/4" [184mm]

420W=White Eyeball, Baffle and Trim  
420P=White Eyeball, Black Baffle, White Trim



#### 478 PAR38 Adjustable Regressed Gimbal with Splay 25° Tilt, Self-flange

OD: 7-1/4" [184mm]

478P=White Splay and Trim



#### 6130 BR/PAR30 Eyeball 35° Tilt, Self-flange

OD: 7-3/4" [197mm]

6130WH=White Eyeball and Trim



#### 6170 PAR38 Gimbal 25° Tilt, Self-flange

OD: 7-3/4" [197mm]

6170WH=White Gimbal and Trim  
6170BK=Black Gimbal and Trim  
6170SN=Satin Nickel Gimbal and Trim  
6170TBZ=Tuscan Bronze Gimbal and Trim



#### 6215 PAR30 Double Gimbal 35°-50° Tilt, Self-flange

OD: 7-3/4" [197mm]

6215WH=White Gimbal and Trim  
6215BK=Black Gimbal and Trim  
6215SN=Satin Nickel Gimbal and Trim  
6215TBZ=Tuscan Bronze Gimbal and Trim



#### 6222 Regressed PAR30 Adjustable 45° Tilt, Self-flange

OD: 7-3/4" [197mm]

6222WB=White Baffle and Trim  
6222BB=Black Baffle and Trim  
6222SC=Specular Clear Reflector, White Trim  
6222H=Haze Reflector, White Trim

#### Lenses & Wet Location Showerlights



#### 170 Albalite Lens with Reflector

OD: 8" [203mm]

170P=Frosted Albalite Glass Lens, White Trim  
170PS=Frosted Albalite Glass Lens, White Plastic Trim, Showerlight, Air-Tite



#### 171 Drop Opal Lens with Reflector

OD: 8" [203mm]

171P=Drop Opal Glass Lens, White Trim  
171PS=Drop Opal Glass Lens, White Plastic Trim, Showerlight, Air-Tite



#### 172 Dome Lens with Reflector

OD: 7-3/4" [197mm]

172PS=Frosted Glass Dome, White Plastic Trim  
172SNS=Frosted Glass Dome, Satin Nickel Plastic Trim  
172TBZS=Frosted Glass Dome, Tuscan Bronze Plastic Trim



#### 173 Fresnel Lens with Reflector

OD: 8" [203mm]

173P=Fresnel Glass Lens, White Trim  
173PS=Fresnel Glass Lens, White Plastic Trim, Showerlight, Air-Tite



#### 6145 Open Wet Location, Shallow Reflector, Self-flange - Showerlight\*

OD: 7-3/4" [197mm]

6145WH=White Reflector and Trim  
6145SN=Satin Nickel Reflector and Trim  
6145TBZ=Tuscan Bronze Reflector and Trim



#### 6146 Open Wet Location, Full Reflector, Self-flange - Showerlight\*

OD: 7-3/4" [197mm]

6146WH=White Reflector and Trim  
6146SN=Satin Nickel Reflector and Trim  
6146TBZ=Tuscan Bronze Reflector and Trim



#### 6150 Frost Dome Glass Lens, Self-flange

OD: 7-3/4" [197mm]

6150WH=Frost Dome Glass Lens with Reflector, White Plastic Trim  
6150SN=Frost Dome Glass Lens with Reflector, Satin Nickel Plastic Trim  
6150TBZ=Frost Dome Glass Lens with Reflector, Tuscan Bronze Plastic Trim



#### 6162 Drop Opal Plastic Lens, Self-flange - Showerlight

OD: 7-3/4" [197mm]

6162WH=Drop Opal Plastic Lens with Reflector, White Plastic Trim



#### 6230 Squirrel Frost Glass Lens, Metal Trim - Showerlight

OD: 7-1/4" [183mm]

6230AH=Frost Glass Lens, Aluminum Haze Squirrel Trim  
6230PN=Frost Glass Lens, Polished Nickel Squirrel Trim  
6230SN=Frost Glass Lens, Satin Nickel Squirrel Trim  
6230TBZ=Frost Glass Lens, Tuscan Bronze Squirrel Trim



#### 6255 Soft Square, Frost Curve Glass Lens, Self-flange - Showerlight

OD: 7-1/4" [183mm]

6255WH=Frost Curve Glass Lens with Reflector, White Plastic Trim  
6255SN=Frost Curve Glass Lens with Reflector, Satin Nickel Plastic Trim  
6255TBZ=Frost Curve Glass Lens with Reflector, Tuscan Bronze Plastic Trim

#### Open, Splay & Wall Wash



#### 300 Open Trim with Fixed Socket Bracket, Self-flange

OD: 7-1/4" [183mm]

300P=Self-flange with White Open Trim  
300SN=Self-flange with Satin Nickel Open Trim  
300TBZ=Self-flange with Tuscan Bronze Open Trim



#### 327 White Splay Trim with Fixed Socket Bracket, Self-flange

OD: 7-3/4" [197mm]

327P=White Splay Trim with Socket Bracket



#### 430 Wall Wash with Baffle & Full Reflector

OD: 7-1/4" [183mm]

430W=White Baffle, with Upper Reflector, White Trim  
430P=Black Baffle, with Upper Reflector, White Trim

\*Outdoor rated lamp only (purchase separately)

**Description**

The E71CATNB is a compact and efficient recessed housing optimized and listed for EISA compliant tungsten-halogen, CFL and LED lamps as well as incandescent. Housing is suitable for residential or light commercial applications. For installation in insulated ceilings\* and non-insulated ceilings with airtight code compliant construction. Use with a variety of trims and finishes to create different lighting effects or to match any decor. May be retrofit with compatible HALO LED lighting systems.

The E71CATNB can save installation time. It is designed without a socket plate for use with socket supporting trims only. With these trims there is no need to spend time removing the socket plate and the fixed lamp position of socket supporting trims saves on lamp adjustment time too.

|             |  |      |
|-------------|--|------|
| Catalog #   |  | Type |
| Project     |  |      |
| Comments    |  | Date |
| Prepared by |  |      |

**Specification Features**

**Housing**

- Single wall die-formed aluminum housing
- Housing features a precision rolled interlocking collar which maintains aperture geometry for greater assurance of installation results
- Integral gasket for code-required gasket between fixture and finished ceiling - seals aperture without need for additional caulk
- May be removed from the plaster frame to provide access to junction box

**Plaster Frame**

- Galvanized steel frame. Housing adjusts in plaster frame to accommodate up to 3/8" - 1" ceiling thickness.
- (2) Regressed locking screws for securing hanger bars
- Integral Air-Tite gasket seals housing and meets code-required gasket between fixture and finished ceiling

**Includes:**

**Bar Hangers  
All Nail!™**

- Integral precisely positioned nail for engineered and natural framing
- Mini-foot leveling flange
- Integral T-Grid Clip, no accessory clips required

**q-Channel bars with Pass-N-Thru™**

- Unique inverted "q" interlocking channel for rigidity and stability
- Pass-N-Thru™ feature allows bars to cross-over for tool-less shortening in tight spaces

**Hinged junction box w/  
Slide-N-Side™**

- (3) Slide-N-Side™ Non-Metallic (NM) wire traps, allow wiring outside the box
- For 14-2, 14-3, 12-2, 12-3 U.S. and 14-2, 14-3, 12-2 Canadian
- (4) 1/2" conduit pry-outs
- Hinged door for easy access
- Box is repositionable 90° on frame to avoid obstructions

**Quick Connect™**

- (3) Push wire nuts included, for speed & reliability
- Clear caps for wire connection visibility

**cULus Listed**

- Compact 16 in<sup>3</sup> volume
- Listed for max. (10) No. 12 AWG or (14) No. 14 AWG 90° C splice conductors in box

**Air-Tite™ code compliant**

- Certified under ASTM E283
- Exclusive gasket seals aperture, frame & ceiling
- No additional caulk required

**Socket**

- Porcelain socket with nickel plated brass screw shell
- Snap-in socket speeds installation and attaches directly to the trim for consistent lamp positioning

**Thermal Protector**

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

**Trims**

- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types including Halogen, CFL and LED

**Compliance**

- cULus Listed 1598 Luminaire
- cULus Listed Damp Location
- cULus Listed for Wet Location, covered ceiling, with select trims
- cULus Listed for direct contact with insulation and combustible material\*
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential
- RoHS compliant

\*Not to be used in direct contact with spray foam insulation (Consult NEMA LSD57-2013).



**E71CATNB**


**6" IC, Air-Tite,  
New Construction  
Housing, No Bracket**

**E26 Screw base housing**

**FOR USE IN INSULATED  
CEILINGS**

**FOR DIRECT CONTACT  
WITH INSULATION\***

**Dimensions**

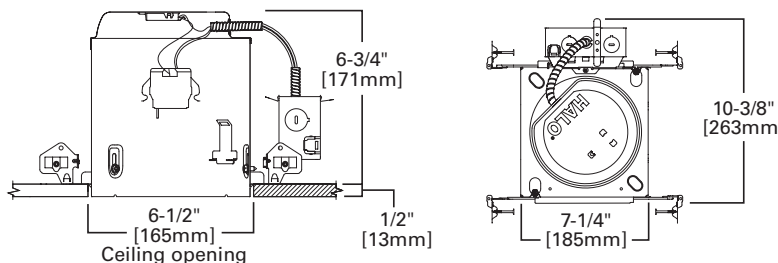

**Special Features**

- All-Nail!™ bar hangers
- q-Channel bars with Pass-N-Thru™
- Hinged J-Box with Slide-N-Side™
- Quick Connect™ push wire nuts
- Air-Tite™ code compliant

## Ordering Information
































Sample Number: E71CATNB 6125WB

Order housing, trim and lamp (by others) separately for a complete luminaire.

### Housing

E71CATNB = 6" insulated ceiling, airtight recessed housing, new construction, no socket bracket, 120V

### Trims

|   |  |   |
|---|--|---|
|  <p><b>30 Reflector, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>30HAT=Haze Reflector, White Trim<br/>30RGAT=Residential Gold Reflector, White Trim<br/>30CAT=Clear Specular Reflector, White Trim</p>   |  <p><b>378 PAR30 Regressed Gimbal with Splay 25° Tilt, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>378P=White Splay and Trim<br/>378=Clear Specular Splay and White Trim</p>   |  <p><b>6145 Open Wet Location, Shallow Reflector, Self-flange - Showerlight*</b><br/>OD: 7-3/4" [197mm]<br/>6145WH=White Reflector and Trim<br/>6145SN=Satin Nickel Reflector and Trim<br/>6145TBZ=Tuscan Bronze Reflector and Trim</p>  |
|  <p><b>30SBAT Reflector, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>30SBAT=Black Specular Reflector, Self-flange</p>  |  <p><b>420 BR/PAR30 Regressed Eyeball 30° Tilt, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>420W=White Eyeball, Baffle and Trim<br/>420P=White Eyeball, Black Baffle, White Trim</p>   |  <p><b>6146 Open Wet Location, Full Reflector, Self-flange - Showerlight*</b><br/>OD: 7-3/4" [197mm]<br/>6146WH=White Reflector and Trim<br/>6146SN=Satin Nickel Reflector and Trim<br/>6146TBZ=Tuscan Bronze Reflector and Trim</p>   |
|  <p><b>404 Specular Reflector</b><br/>OD: 7-1/4" [184mm]<br/>404C=Clear Specular Reflector, White Trim<br/>404H=Haze Reflector, White Trim<br/>404SN=Satin Nickel Reflector and Trim<br/>404TBZ=Tuscan Bronze Reflector and Trim</p>  |  <p><b>478 PAR38 Adjustable Regressed Gimbal with Splay 25° Tilt, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>478P=White Splay and Trim</p>  |  <p><b>6150 Frost Dome Glass Lens, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6150WH=Frost Dome Glass Lens with Reflector, White Plastic Trim<br/>6150SN=Frost Dome Glass Lens with Reflector, Satin Nickel Plastic Trim<br/>6150TBZ=Frost Dome Glass Lens with Reflector, Tuscan Bronze Plastic Trim</p>                                  |
|  <p><b>4041 White Reflector, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>4041P=White Reflector and Trim</p>  |  <p><b>6130 BR/PAR30 Eyeball 35° Tilt, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6130WH=White Eyeball and Trim</p>   |  <p><b>6162 Drop Opal Plastic Lens, Self-flange - Showerlight</b><br/>OD: 7-3/4" [197mm]<br/>6162WH=Drop Opal Plastic Lens with Reflector, White Plastic Trim</p>  |
|  <p><b>6120 Full Cone Reflector, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6120WH=White Reflector and Trim<br/>6120SN=Satin Nickel Reflector and Trim<br/>6120TBZ=Tuscan Bronze Reflector and Trim</p>   |  <p><b>6170 PAR38 Gimbal 25° Tilt, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6170WH=White Gimbal and Trim<br/>6170BK=Black Gimbal and Trim<br/>6170SN=Satin Nickel Gimbal and Trim<br/>6170TBZ=Tuscan Bronze Gimbal and Trim</p>                           |  <p><b>6230 Squircle Frost Glass Lens, Metal Trim - Showerlight</b><br/>OD: 7-1/4" [183mm]<br/>6230AH=Frost Glass Lens, Aluminum Haze Squircle Trim<br/>6230PN=Frost Glass Lens, Polished Nickel Squircle Trim<br/>6230SN=Frost Glass Lens, Satin Nickel Squircle Trim<br/>6230TBZ=Frost Glass Lens, Tuscan Bronze Squircle Trim</p>       |
|  <p><b>6121 Shallow Full Cone Reflector, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6121WH=White Reflector and Trim</p>   |  <p><b>6215 PAR30 Double Gimbal 35°-50° Tilt, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6215WH=White Gimbal and Trim<br/>6215BK=Black Gimbal and Trim<br/>6215SN=Satin Nickel Gimbal and Trim<br/>6215TBZ=Tuscan Bronze Gimbal and Trim</p>                |  <p><b>6255 Soft Square, Frost Curve Glass Lens, Self-flange - Showerlight</b><br/>OD: 7-1/4" [183mm]<br/>6255WH=Frost Curve Glass Lens with Reflector, White Plastic Trim<br/>6255SN=Frost Curve Glass Lens with Reflector, Satin Nickel Plastic Trim<br/>6255TBZ=Frost Curve Glass Lens with Reflector, Tuscan Bronze Plastic Trim</p> |
| <p><b>Baffles</b></p>  <p><b>30 Baffle, Self-flange</b><br/>OD: 7-1/4" [184mm]<br/>30WAT=White Baffle, Reflector and Trim<br/>30WATH=White Baffle, Clear Reflector and White Trim<br/>30PAT=Black Baffle, Clear Reflector and White Trim<br/>30SNAT=Satin Nickel Baffle, Reflector and Trim<br/>30TBZAT=Tuscan Bronze Baffle, Reflector and Trim</p> |  <p><b>6222 Regressed PAR30 Adjustable 45° Tilt, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6222WB=White Baffle and Trim<br/>6222BB=Black Baffle and Trim<br/>6222SC=Specular Clear Reflector, White Trim<br/>6222H=Haze Reflector, White Trim</p>         | <p><b>Open, Splay &amp; Wall Wash</b></p>  <p><b>300 Open Trim with Fixed Socket Bracket, Self-flange</b><br/>OD: 7-1/4" [183mm]<br/>300P=Self-flange with White Open Trim<br/>300SN=Self-flange with Satin Nickel Open Trim<br/>300TBZ=Self-flange with Tuscan Bronze Open Trim</p>   |
|  <p><b>6125 Full Cone Baffle, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>6125WB=White Baffle and Trim<br/>6125BB=Black Baffle, White Trim<br/>6125BKBB=Black Baffle and Trim</p>  | <p><b>Lenses &amp; Wet Location Showerlights</b></p>  <p><b>170 Albalite Lens with Reflector</b><br/>OD: 8" [203mm]<br/>170P=Frosted Albalite Glass Lens, White Trim<br/>170PS=Frosted Albalite Glass Lens, White Plastic Trim, Showerlight, Air-Tite</p> |  <p><b>327 White Splay Trim with Fixed Socket Bracket, Self-flange</b><br/>OD: 7-3/4" [197mm]<br/>327P=White Splay Trim with Socket Bracket</p>  |
| <p><b>Adjustable - Eyeballs &amp; Gimbals</b></p>  <p><b>74 PAR30 Eyeball 30° Tilt, Self-flange</b><br/>OD: 8" [203mm]<br/>74P=White Eyeball and Trim</p>   |  <p><b>171 Drop Opal Lens with Reflector</b><br/>OD: 8" [203mm]<br/>171P=Drop Opal Glass Lens, White Trim<br/>171PS=Drop Opal Glass Lens, White Plastic Trim, Showerlight, Air-Tite</p>   |  <p><b>430 Wall Wash with Baffle &amp; Full Reflector</b><br/>OD: 7-1/4" [183mm]<br/>430W=White Baffle, with Upper Reflector, White Trim<br/>430P=Black Baffle, with Upper Reflector, White Trim</p>   |
|  <p><b>76 PAR38 Gimbal 30° Tilt, Self-flange</b><br/>OD: 8" [203mm]<br/>76P=White Gimbal and Trim</p>   |  <p><b>172 Dome Lens with Reflector</b><br/>OD: 7-3/4" [197mm]<br/>172PS=Frosted Glass Dome, White Plastic Trim<br/>172SNS=Frosted Glass Dome, Satin Nickel Plastic Trim<br/>172TBZS=Frosted Glass Dome, Tuscan Bronze Plastic Trim</p>                   |   |
|  <p><b>78 BR/PAR30 Eyeball 30° Tilt, Self-flange</b><br/>OD: 8" [203mm]<br/>78P=White Eyeball and Trim<br/>78PAT=White Eyeball and Trim, Air-Tite<br/>78SN=Satin Nickel Eyeball and Trim<br/>78TBZ=Tuscan Bronze Eyeball and Trim</p>   |  <p><b>173 Fresnel Lens with Reflector</b><br/>OD: 8" [203mm]<br/>173P=Fresnel Glass Lens, White Trim<br/>173PS=Fresnel Glass Lens, White Plastic Trim, Showerlight, Air-Tite</p>   | <p>*Outdoor rated lamp only (purchase separately)</p>   |