## Description

The E7RICAT is a compact and efficient recessed housing optimized and listed for EISA compliant tungsten-halogen, CFL and LED lamps as well as incandescent. Housing is suitable for residential or light commercial applications. For installation in insulated ceilings* and non-insulated ceilings with airtight code compliant construction. Use with a variety of trims and finishes to create different lighting effects or to match any decor. May be retrofit with compatible HALO LED lighting systems.

| | | |
|---|---|---|
| Catalog # | | Type |
| Project | | |
| Comments | | Date |
| Prepared by | | |

## Specification Features

### Housing
- Single wall die-formed aluminum housing
- Housing features a precision rolled interlocking collar which maintains aperture geometry for greater assurance of installation results
- Integral Air-Tite gasket for code-required gasket between fixture and finished ceiling - seals aperture without need for additional caulk
- Shipped with socket overspray protector installed
- For installation from below the finished ceiling. Integral flange secures fixture against ceiling

### Remodel Retention System - Speed Clamps
- Exclusive two integral speed clamps securely lock housing to ceiling, accommodating 3/8" to 2" ceiling materials
- Use screwdriver or power driver to set clamps

### Socket Plate
- Rigid socket plate adjusts and locks without tools for various lamp sizes.
- Socket plate and bracket may be removed when using socket supporting trims

### Includes:
Remodel Speed Clamps
- (2) Exclusive integral speed clamps
- Speed clamp tabs securely lock to ceiling
- Speed clamps can be loosened for easy repositioning
- Speed clamps feature internal drive screws – a power screwdriver speeds installation
- Two-tier tabs adjust for 3/8" to 2" of various ceiling materials

Attached-Arm Design
- Attached arm gets into tight spaces
- Ease of installing through the ceiling aperture
- Smaller footprint for packing and distributor shelf space

Hinged junction box w/ Slide-N-Side™
- (4) ½" conduit pry-outs
- (2) Slide-N-Side™ Non-Metallic (NM) wire traps, allow wiring outside the box
- For 14-2, 14-3, 2-2, 12-3 U.S. and 14-2, 14-3, 12-2 Canadian
- Hinged door for easy access

Quick Connect™ Wiring Tray
- (3) Color coded push wire nuts in captive tray for one-handed connection
- Aids in speed & reliability
- Clear caps for wire connection visibility

cULus Listed
- Compact 10 $in^3$ box volume
- Listed for maximum (6) No. 12 AWG or (8) No. 14 AWG 90˚ C splice conductors in box

Remodel Flange
- Die formed flange maintains precise whole circumference
- Integral flange secures fixture against the ceiling

Air-Tite™ code compliant
- Certified under ASTM E283
- Exclusive gasket seals aperture, frame & ceiling
- No additional caulk required

### Socket
- Porcelain socket with nickel plated brass screw shell
- Snap-in springs secure socket to socket plate, and may be detached when using socket supporting trims


### Thermal Protector
- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping


### Trims
- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types including Halogen, CFL and LEDD

### Compliance
- cULus Listed 1598 Luminaire
- cULus Listed Damp Location
- cULus Listed for Wet Location, covered ceiling, with select trims
- cULus Listed for direct contact with insulation and combustible material*
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential
- RoHS compliant

*Not to be used in direct contact with spray foam insulation (Consult NEMA LSD57-2013)

## Dimensions

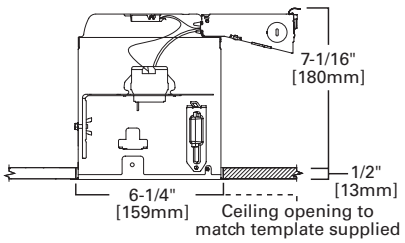




# E7RICAT

**6" IC, Air-Tite, Remodel Housing**

**E26 Screw base housing**

**FOR USE IN INSULATED CEILINGS**

**FOR DIRECT CONTACT WITH INSULATION***

### Special Features
Hinged J-Box with Slide-N-Side™
Quick Connect™ push wire nuts
Air-Tite™ code compliant
Speed Clamps

## Ordering Information

**Sample Number:** E7RICAT 6110WB
Order housing, trim and lamp (by others) separately for a complete luminaire.

### Housing

**E7RICAT** = 6" insulated ceiling, airtight recessed housing, remodel, 120V

### Trims

#### Reflectors



**30 Reflector, Self-flange**
OD: 7-1/4" [184mm]
**30HAT**=Haze Reflector, White Trim
**30RGAT**=Residential Gold Reflector, White Trim
**30CAT**=Clear Specular Reflector, White Trim



**30SBAT Reflector, Self-flange**
OD: 7-1/4" [184mm]
**30SBAT**=Black Specular Reflector, Self-flange



**426 Reflector Cone**
OD: 7-1/4" [184mm]
**426**=Clear Specular Reflector Cone, White Trim
**426MB**=Black Specular Reflector Cone, White Trim
**426H**=Haze Reflector Cone, White Trim
**426SN**=Satin Nickel Reflector Cone and Trim
**426TBZ**=Tuscan Bronze Reflector Cone and Trim



**429 Dayform White Cone**
OD: 7-1/4" [184mm]
**429P**=White Reflector and Trim



**4261 White Reflector Cone, Self-flange**
OD: 7-1/4" [184mm]
**4261P**=White Reflector and Trim



**6106 Straight Reflector Cone, Self-flange**
OD: 7-3/4" [197mm]
**6106SC**=Specular Reflector, White Trim



**6107 Tapered Reflector, Self-flange**
OD: 7-3/4" [197mm]
**6107SC**=Specular Reflector, White Trim



**6120 Full Cone Reflector, Self-flange**
OD: 7-3/4" [197mm]
**6120WH**=White Reflector and Trim
**6120SN**=Satin Nickel Reflector and Trim
**6120TBZ**=Tuscan Bronze Reflector and Trim



**6121 Shallow Full Cone Reflector, Self-flange**
OD: 7-3/4" [197mm]
**6121WH**=White Reflector and Trim

#### Baffles




**30 Baffle, Self-flange**
OD: 7-1/4" [184mm]
**30WAT**=White Baffle, Reflector and Trim
**30WATH**=White Baffle, Clear Reflector and White Trim
**30PAT**=Black Baffle, Clear Reflector and White Trim
**30SNAT**=Satin Nickel Baffle, Reflector and Trim
**30TBZAT**=Tuscan Bronze Baffle, Reflector and Trim




**310 Coilex® Baffle**
OD: 7-1/4" [184mm]
**310W**=White Coilex Baffle and Trim
**310P**=Black Coilex Baffle, White Trim
**310SN**=Black Coilex Baffle, Satin Nickel Trim
**310TBZ**=Black Coilex Baffle, Tuscan Bronze Trim



**312 Coilex® Baffle**
OD: 7-1/4" [184mm]
**312W**=White Coilex Baffle and Trim
**312P**=Black Coilex Baffle, White Trim



**353 Metal Baffle**
OD: 7-1/4" [184mm]
**353SN**=Satin Nickel Baffle and Trim
**353TBZ**=Tuscan Bronze Baffle and Trim



**6100 Tapered Metal Baffle with (2) Trim Rings**
OD: 7-1/8" [181mm]
**6100WB**=White Baffle, Narrow and Wide White Trims (included)
**6100BB**=Black Baffle, Narrow and Wide White Trims (included)



**6101 Straight Metal Baffle with (2) Trim Rings**
OD: 7-1/8" [181mm]
**6101WB**=White Baffle, Narrow and Wide White Trims (included)
**6101BB**=Black Baffle, Narrow and Wide White Trims (included)



**6102 Tapered Metal Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6102WB**=White Baffle and Trim
**6102BB**=Black Baffle, White Trim



**6103 Straight Metal Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6103WB**=White Baffle and Trim
**6103BB**=Black Baffle, White Trim



**6108 Coilex® Straight Plastic Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6108WB**=White Plastic Straight Coilex Baffle, White Trim
**6108BB**=Black Plastic Straight Coilex Baffle, White Trim
**6108BKBB**=Black Plastic Straight Coilex Baffle, Black Trim



**6109 Coilex® Tapered Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6109WB**=White Tapered Coilex Baffle, White Trim
**6109BB**=Black Tapered Coilex Baffle, White Trim
**6109BKBB**=Black Tapered Coilex Baffle, Black Trim



**6110 Perftex Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6110WB**=White Perftex Baffle and Trim
**6110BB**=Black Perftex Baffle, White Trim
**6110BKBB**=Black Perftex Baffle and Trim



**6125 Full Cone Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6125WB**=White Baffle and Trim
**6125BB**=Black Baffle, White Trim
**6125BKBB**=Black Baffle and Trim



**6126 Shallow Full Cone Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6126WB**=White Baffle and Trim
**6126BB**=Black Baffle, White Trim

#### Adjustable - Eyeballs & Gimbals



**74 PAR30 Eyeball 30° Tilt, Self-flange**
OD: 8" [203mm]
**74P**=White Eyeball and Trim



**76 PAR38 Gimbal 30° Tilt, Self-flange**
OD: 8" [203mm]
**76P**=White Gimbal and Trim



**78 BR/PAR30 Eyeball 30° Tilt, Self-flange**
OD: 8" [203mm]
**78P**=White Eyeball and Trim
**78PAT**=White Eyeball and Trim, Air-Tite
**78SN**=Satin Nickel Eyeball and Trim
**78TBZ**=Tuscan Bronze Eyeball and Trim



**376 PAR30 Regressed Gimbal 30° Tilt, Self-flange**
OD: 7-1/4" [184mm]
**376W**=White Baffle and Trim
**376P**=Black Baffle and White Trim



**420 BR/PAR30 Regressed Eyeball 30° Tilt, Self-flange**
OD: 7-1/4" [184mm]
**420W**=White Eyeball, Baffle and Trim
**420P**=White Eyeball, Black Baffle, White Trim



**478 PAR38 Adjustable Regressed Gimbal with Splay 25° Tilt, Self-flange**
OD: 7-1/4" [184mm]
**478P**=White Splay and Trim



**6130 BR/PAR30 Eyeball 35° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6130WH**=White Eyeball and Trim



**6170 PAR38 Gimbal 25° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6170WH**=White Gimbal and Trim
**6170BK**=Black Gimbal and Trim
**6170SN**=Satin Nickel Gimbal and Trim
**6170TBZ**=Tuscan Bronze Gimbal and Trim



**6215 PAR30 Double Gimbal 35°-50° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6215WH**=White Gimbal and Trim
**6215BK**=Black Gimbal and Trim
**6215SN**=Satin Nickel Gimbal and Trim
**6215TBZ**=Tuscan Bronze Gimbal and Trim



**6222 Regressed PAR30 Adjustable 45° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6222WB**=White Baffle and Trim
**6222BB**=Black Baffle and Trim
**6222SC**=Specular Clear Reflector, White Trim
**6222H**=Haze Reflector, White Trim

#### Lenses & Wet Location Showerlights



**170 Albalite Lens with Reflector**
OD: 8" [203mm]
**170P**=Frosted Albalite Glass Lens, White Trim
**170PS**=Frosted Albalite Glass Lens, White Plastic Trim, Showerlight, Air-Tite



**171 Drop Opal Lens with Reflector**
OD: 8" [203mm]
**171P**=Drop Opal Glass Lens, White Trim
**171PS**=Drop Opal Glass Lens, White Plastic Trim, Showerlight, Air-Tite



**172 Dome Lens with Reflector**
OD: 7-3/4" [197mm]
**172PS**=Frosted Glass Dome, White Plastic Trim
**172SNS**=Frosted Glass Dome, Satin Nickel Plastic Trim
**172TBZS**=Frosted Glass Dome, Tuscan Bronze Plastic Trim

continued

***Outdoor rated lamp only (purchase separately)**



Powering Business Worldwide

## Ordering Information

**Sample Number:** E7RICAT 6110
Order housing, trim and lamp (by others) separately for a complete luminaire.

### Housing

**E7RICAT** = 6" insulated ceiling, airtight recessed housing, remodel, 120V

### Trims

#### Lenses & Wet Location Showerlights



**173 Fresnel Lens with Reflector**
OD: 8" [203mm]
**173P**=Fresnel Glass Lens, White Trim
**173PS**=Fresnel Glass Lens, White Plastic Trim, Showerlight, Air-Tite



**6145 Open Wet Location, Shallow Reflector, Self-flange - Showerlight***
OD: 7-3/4" [197mm]
**6145WH**=White Reflector and Trim
**6145SN**=Satin Nickel Reflector and Trim
**6145TBZ**=Tuscan Bronze Reflector and Trim



**6146 Open Wet Location, Full Reflector, Self-flange - Showerlight***
OD: 7-3/4" [197mm]
**6146WH**=White Reflector and Trim
**6146SN**=Satin Nickel Reflector and Trim
**6146TBZ**=Tuscan Bronze Reflector and Trim



**6150 Frost Dome Glass Lens, Self-flange**
OD: 7-3/4" [197mm]
**6150WH**=Frost Dome Glass Lens with Reflector, White Plastic Trim
**6150SN**=Frost Dome Glass Lens with Reflector, Satin Nickel Plastic Trim
**6150TBZ**=Frost Dome Glass Lens with Reflector, Tuscan Bronze Plastic Trim



**6162 Drop Opal Plastic Lens, Self-flange - Showerlight**
OD: 7-3/4" [197mm]
**6162WH**=Drop Opal Plastic Lens with Reflector, White Plastic Trim



**6230 Squircle Frost Glass Lens, Metal Trim - Showerlight**
OD: 7-1/4" [183mm]
**6230AH**=Frost Glass Lens, Aluminum Haze Squircle Trim
**6230PN**=Frost Glass Lens, Polished Nickel Squircle Trim
**6230SN**=Frost Glass Lens, Satin Nickel Squircle Trim
**6230TBZ**=Frost Glass Lens, Tuscan Bronze Squircle Trim



**6255 Soft Square, Frost Curve Glass Lens, Self-flange - Showerlight**
OD: 7-1/4" [183mm]
**6255WH**=Frost Curve Glass Lens with Reflector, White Plastic Trim
**6255SN**=Frost Curve Glass Lens with Reflector, Satin Nickel Plastic Trim
**6255TBZ**=Frost Curve Glass Lens with Reflector, Tuscan Bronze Plastic Trim

#### Open, Splay & Wall Wash



**300 Open Trim with Fixed Socket Bracket, Self-flange**
OD: 7-1/4" [183mm]
**300P**=Self-flange with White Open Trim
**300SN**=Self-flange with Satin Nickel Open Trim
**300TBZ**=Self-flange with Tuscan Bronze Open Trim



**327 White Splay Trim with Fixed Socket Bracket, Self-flange**
OD: 7-3/4" [197mm]
**327P**=White Splay Trim with Socket Bracket



**328 White Splay Trim**
OD: 7-3/4" [197mm]
**328P**=White Splay Trim



**430 Wall Wash with Baffle & Full Reflector**
OD: 7-1/4" [183mm]
**430W**=White Baffle, with Upper Reflector, White Trim
**430P**=Black Baffle, with Upper Reflector, White Trim

***Outdoor rated lamp only (purchase separately)**

Powering Business Worldwide

**Eaton**
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Specifications and dimensions subject to change without notice.

c UL us LISTED
**For use in Halo listed housings.**

CLASSIFIED c UL us
**Select trims are classified for use in others housings.**
**See www.eaton.com/lighting/legal.**

## Description

The E7RICAT is a compact and efficient recessed housing optimized and listed for EISA compliant tungsten-halogen, CFL and LED lamps as well as incandescent. Housing is suitable for residential or light commercial applications. For installation in insulated ceilings* and non-insulated ceilings with airtight code compliant construction. Use with a variety of trims and finishes to create different lighting effects or to match any decor. May be retrofit with compatible HALO LED lighting systems.

| | | |
|---|---|---|
| Catalog # | | Type |
| Project | | |
| Comments | | Date |
| Prepared by | | |

## Specification Features

### Housing
- Single wall die-formed aluminum housing
- Housing features a precision rolled interlocking collar which maintains aperture geometry for greater assurance of installation results
- Integral Air-Tite gasket for code-required gasket between fixture and finished ceiling - seals aperture without need for additional caulk
- Shipped with socket overspray protector installed
- For installation from below the finished ceiling. Integral flange secures fixture against ceiling

### Remodel Retention System - Speed Clamps
- Exclusive two integral speed clamps securely lock housing to ceiling, accommodating 3/8" to 2" ceiling materials
- Use screwdriver or power driver to set clamps

### Socket Plate
- Rigid socket plate adjusts and locks without tools for various lamp sizes.
- Socket plate and bracket may be removed when using socket supporting trims

### Includes:
Remodel Speed Clamps
- (2) Exclusive integral speed clamps
- Speed clamp tabs securely lock to ceiling
- Speed clamps can be loosened for easy repositioning
- Speed clamps feature internal drive screws – a power screwdriver speeds installation
- Two-tier tabs adjust for 3/8" to 2" of various ceiling materials

Attached-Arm Design
- Attached arm gets into tight spaces
- Ease of installing through the ceiling aperture
- Smaller footprint for packing and distributor shelf space

Hinged junction box w/ Slide-N-Side™
- (4) ½" conduit pry-outs
- (2) Slide-N-Side™ Non-Metallic (NM) wire traps, allow wiring outside the box
- For 14-2, 14-3, 2-2, 12-3 U.S. and 14-2, 14-3, 12-2 Canadian
- Hinged door for easy access

Quick Connect™ Wiring Tray
- (3) Color coded push wire nuts in captive tray for one-handed connection
- Aids in speed & reliability
- Clear caps for wire connection visibility

cULus Listed
- Compact 10 $in^3$ box volume
- Listed for maximum (6) No. 12 AWG or (8) No. 14 AWG 90˚ C splice conductors in box

Remodel Flange
- Die formed flange maintains precise whole circumference
- Integral flange secures fixture against the ceiling

Air-Tite™ code compliant
- Certified under ASTM E283
- Exclusive gasket seals aperture, frame & ceiling
- No additional caulk required

### Socket
- Porcelain socket with nickel plated brass screw shell
- Snap-in springs secure socket to socket plate, and may be detached when using socket supporting trims


### Thermal Protector
- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping


### Trims
- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types including Halogen, CFL and LEDD

### Compliance
- cULus Listed 1598 Luminaire
- cULus Listed Damp Location
- cULus Listed for Wet Location, covered ceiling, with select trims
- cULus Listed for direct contact with insulation and combustible material*
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential
- RoHS compliant

*Not to be used in direct contact with spray foam insulation (Consult NEMA LSD57-2013)

## Dimensions

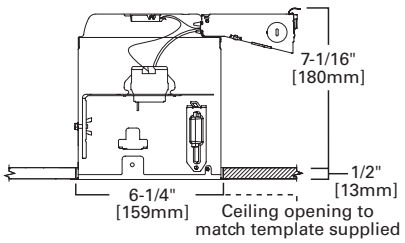




# E7RICAT

**6" IC, Air-Tite, Remodel Housing**

**E26 Screw base housing**

**FOR USE IN INSULATED CEILINGS**

**FOR DIRECT CONTACT WITH INSULATION***

### Special Features
Hinged J-Box with Slide-N-Side™
Quick Connect™ push wire nuts
Air-Tite™ code compliant
Speed Clamps

## Ordering Information

**Sample Number:** E7RICAT 6110WB
Order housing, trim and lamp (by others) separately for a complete luminaire.

### Housing

**E7RICAT** = 6" insulated ceiling, airtight recessed housing, remodel, 120V

### Trims

#### Reflectors



**30 Reflector, Self-flange**
OD: 7-1/4" [184mm]
**30HAT**=Haze Reflector, White Trim
**30RGAT**=Residential Gold Reflector, White Trim
**30CAT**=Clear Specular Reflector, White Trim



**30SBAT Reflector, Self-flange**
OD: 7-1/4" [184mm]
**30SBAT**=Black Specular Reflector, Self-flange



**426 Reflector Cone**
OD: 7-1/4" [184mm]
**426**=Clear Specular Reflector Cone, White Trim
**426MB**=Black Specular Reflector Cone, White Trim
**426H**=Haze Reflector Cone, White Trim
**426SN**=Satin Nickel Reflector Cone and Trim
**426TBZ**=Tuscan Bronze Reflector Cone and Trim



**429 Dayform White Cone**
OD: 7-1/4" [184mm]
**429P**=White Reflector and Trim



**4261 White Reflector Cone, Self-flange**
OD: 7-1/4" [184mm]
**4261P**=White Reflector and Trim



**6106 Straight Reflector Cone, Self-flange**
OD: 7-3/4" [197mm]
**6106SC**=Specular Reflector, White Trim



**6107 Tapered Reflector, Self-flange**
OD: 7-3/4" [197mm]
**6107SC**=Specular Reflector, White Trim



**6120 Full Cone Reflector, Self-flange**
OD: 7-3/4" [197mm]
**6120WH**=White Reflector and Trim
**6120SN**=Satin Nickel Reflector and Trim
**6120TBZ**=Tuscan Bronze Reflector and Trim



**6121 Shallow Full Cone Reflector, Self-flange**
OD: 7-3/4" [197mm]
**6121WH**=White Reflector and Trim

#### Baffles




**30 Baffle, Self-flange**
OD: 7-1/4" [184mm]
**30WAT**=White Baffle, Reflector and Trim
**30WATH**=White Baffle, Clear Reflector and White Trim
**30PAT**=Black Baffle, Clear Reflector and White Trim
**30SNAT**=Satin Nickel Baffle, Reflector and Trim
**30TBZAT**=Tuscan Bronze Baffle, Reflector and Trim




**310 Coilex® Baffle**
OD: 7-1/4" [184mm]
**310W**=White Coilex Baffle and Trim
**310P**=Black Coilex Baffle, White Trim
**310SN**=Black Coilex Baffle, Satin Nickel Trim
**310TBZ**=Black Coilex Baffle, Tuscan Bronze Trim



**312 Coilex® Baffle**
OD: 7-1/4" [184mm]
**312W**=White Coilex Baffle and Trim
**312P**=Black Coilex Baffle, White Trim



**353 Metal Baffle**
OD: 7-1/4" [184mm]
**353SN**=Satin Nickel Baffle and Trim
**353TBZ**=Tuscan Bronze Baffle and Trim



**6100 Tapered Metal Baffle with (2) Trim Rings**
OD: 7-1/8" [181mm]
**6100WB**=White Baffle, Narrow and Wide White Trims (included)
**6100BB**=Black Baffle, Narrow and Wide White Trims (included)



**6101 Straight Metal Baffle with (2) Trim Rings**
OD: 7-1/8" [181mm]
**6101WB**=White Baffle, Narrow and Wide White Trims (included)
**6101BB**=Black Baffle, Narrow and Wide White Trims (included)



**6102 Tapered Metal Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6102WB**=White Baffle and Trim
**6102BB**=Black Baffle, White Trim



**6103 Straight Metal Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6103WB**=White Baffle and Trim
**6103BB**=Black Baffle, White Trim



**6108 Coilex® Straight Plastic Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6108WB**=White Plastic Straight Coilex Baffle, White Trim
**6108BB**=Black Plastic Straight Coilex Baffle, White Trim
**6108BKBB**=Black Plastic Straight Coilex Baffle, Black Trim



**6109 Coilex® Tapered Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6109WB**=White Tapered Coilex Baffle, White Trim
**6109BB**=Black Tapered Coilex Baffle, White Trim
**6109BKBB**=Black Tapered Coilex Baffle, Black Trim



**6110 Perftex Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6110WB**=White Perftex Baffle and Trim
**6110BB**=Black Perftex Baffle, White Trim
**6110BKBB**=Black Perftex Baffle and Trim



**6125 Full Cone Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6125WB**=White Baffle and Trim
**6125BB**=Black Baffle, White Trim
**6125BKBB**=Black Baffle and Trim



**6126 Shallow Full Cone Baffle, Self-flange**
OD: 7-3/4" [197mm]
**6126WB**=White Baffle and Trim
**6126BB**=Black Baffle, White Trim

#### Adjustable - Eyeballs & Gimbals



**74 PAR30 Eyeball 30° Tilt, Self-flange**
OD: 8" [203mm]
**74P**=White Eyeball and Trim



**76 PAR38 Gimbal 30° Tilt, Self-flange**
OD: 8" [203mm]
**76P**=White Gimbal and Trim



**78 BR/PAR30 Eyeball 30° Tilt, Self-flange**
OD: 8" [203mm]
**78P**=White Eyeball and Trim
**78PAT**=White Eyeball and Trim, Air-Tite
**78SN**=Satin Nickel Eyeball and Trim
**78TBZ**=Tuscan Bronze Eyeball and Trim



**376 PAR30 Regressed Gimbal 30° Tilt, Self-flange**
OD: 7-1/4" [184mm]
**376W**=White Baffle and Trim
**376P**=Black Baffle and White Trim



**420 BR/PAR30 Regressed Eyeball 30° Tilt, Self-flange**
OD: 7-1/4" [184mm]
**420W**=White Eyeball, Baffle and Trim
**420P**=White Eyeball, Black Baffle, White Trim



**478 PAR38 Adjustable Regressed Gimbal with Splay 25° Tilt, Self-flange**
OD: 7-1/4" [184mm]
**478P**=White Splay and Trim



**6130 BR/PAR30 Eyeball 35° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6130WH**=White Eyeball and Trim



**6170 PAR38 Gimbal 25° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6170WH**=White Gimbal and Trim
**6170BK**=Black Gimbal and Trim
**6170SN**=Satin Nickel Gimbal and Trim
**6170TBZ**=Tuscan Bronze Gimbal and Trim



**6215 PAR30 Double Gimbal 35°-50° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6215WH**=White Gimbal and Trim
**6215BK**=Black Gimbal and Trim
**6215SN**=Satin Nickel Gimbal and Trim
**6215TBZ**=Tuscan Bronze Gimbal and Trim



**6222 Regressed PAR30 Adjustable 45° Tilt, Self-flange**
OD: 7-3/4" [197mm]
**6222WB**=White Baffle and Trim
**6222BB**=Black Baffle and Trim
**6222SC**=Specular Clear Reflector, White Trim
**6222H**=Haze Reflector, White Trim

#### Lenses & Wet Location Showerlights



**170 Albalite Lens with Reflector**
OD: 8" [203mm]
**170P**=Frosted Albalite Glass Lens, White Trim
**170PS**=Frosted Albalite Glass Lens, White Plastic Trim, Showerlight, Air-Tite



**171 Drop Opal Lens with Reflector**
OD: 8" [203mm]
**171P**=Drop Opal Glass Lens, White Trim
**171PS**=Drop Opal Glass Lens, White Plastic Trim, Showerlight, Air-Tite



**172 Dome Lens with Reflector**
OD: 7-3/4" [197mm]
**172PS**=Frosted Glass Dome, White Plastic Trim
**172SNS**=Frosted Glass Dome, Satin Nickel Plastic Trim
**172TBZS**=Frosted Glass Dome, Tuscan Bronze Plastic Trim

continued

***Outdoor rated lamp only (purchase separately)**



Powering Business Worldwide

## Ordering Information

**Sample Number:** E7RICAT 6110
Order housing, trim and lamp (by others) separately for a complete luminaire.

### Housing

**E7RICAT** = 6" insulated ceiling, airtight recessed housing, remodel, 120V

### Trims

#### Lenses & Wet Location Showerlights



**173 Fresnel Lens with Reflector**
OD: 8" [203mm]
**173P**=Fresnel Glass Lens, White Trim
**173PS**=Fresnel Glass Lens, White Plastic Trim, Showerlight, Air-Tite



**6145 Open Wet Location, Shallow Reflector, Self-flange - Showerlight***
OD: 7-3/4" [197mm]
**6145WH**=White Reflector and Trim
**6145SN**=Satin Nickel Reflector and Trim
**6145TBZ**=Tuscan Bronze Reflector and Trim



**6146 Open Wet Location, Full Reflector, Self-flange - Showerlight***
OD: 7-3/4" [197mm]
**6146WH**=White Reflector and Trim
**6146SN**=Satin Nickel Reflector and Trim
**6146TBZ**=Tuscan Bronze Reflector and Trim



**6150 Frost Dome Glass Lens, Self-flange**
OD: 7-3/4" [197mm]
**6150WH**=Frost Dome Glass Lens with Reflector, White Plastic Trim
**6150SN**=Frost Dome Glass Lens with Reflector, Satin Nickel Plastic Trim
**6150TBZ**=Frost Dome Glass Lens with Reflector, Tuscan Bronze Plastic Trim



**6162 Drop Opal Plastic Lens, Self-flange - Showerlight**
OD: 7-3/4" [197mm]
**6162WH**=Drop Opal Plastic Lens with Reflector, White Plastic Trim



**6230 Squircle Frost Glass Lens, Metal Trim - Showerlight**
OD: 7-1/4" [183mm]
**6230AH**=Frost Glass Lens, Aluminum Haze Squircle Trim
**6230PN**=Frost Glass Lens, Polished Nickel Squircle Trim
**6230SN**=Frost Glass Lens, Satin Nickel Squircle Trim
**6230TBZ**=Frost Glass Lens, Tuscan Bronze Squircle Trim



**6255 Soft Square, Frost Curve Glass Lens, Self-flange - Showerlight**
OD: 7-1/4" [183mm]
**6255WH**=Frost Curve Glass Lens with Reflector, White Plastic Trim
**6255SN**=Frost Curve Glass Lens with Reflector, Satin Nickel Plastic Trim
**6255TBZ**=Frost Curve Glass Lens with Reflector, Tuscan Bronze Plastic Trim

#### Open, Splay & Wall Wash



**300 Open Trim with Fixed Socket Bracket, Self-flange**
OD: 7-1/4" [183mm]
**300P**=Self-flange with White Open Trim
**300SN**=Self-flange with Satin Nickel Open Trim
**300TBZ**=Self-flange with Tuscan Bronze Open Trim



**327 White Splay Trim with Fixed Socket Bracket, Self-flange**
OD: 7-3/4" [197mm]
**327P**=White Splay Trim with Socket Bracket



**328 White Splay Trim**
OD: 7-3/4" [197mm]
**328P**=White Splay Trim



**430 Wall Wash with Baffle & Full Reflector**
OD: 7-1/4" [183mm]
**430W**=White Baffle, with Upper Reflector, White Trim
**430P**=Black Baffle, with Upper Reflector, White Trim

***Outdoor rated lamp only (purchase separately)**

Powering Business Worldwide

**Eaton**
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Specifications and dimensions subject to change without notice.

c UL us LISTED
**For use in Halo listed housings.**

CLASSIFIED c UL us
**Select trims are classified for use in others housings.**
**See www.eaton.com/lighting/legal.**