

INVISILED® ACCESSORIES

Indoor mounting accessories

WAC LIGHTING

Responsible Lighting®

| | | | | | | |
|---|---|--------|---------------------|--|---|--|
|  |  | 5 feet | LED-T-CH | Aluminum Channel | Includes a diffuser, two end caps, and five screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| |  | 2 pcs | LED-T-CH-EC | End caps for Aluminum Channel | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 5 feet | LED-T-CH1 | Deep Aluminum Channel | Includes a diffuser, two end caps, and five screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| |  | 2 pcs | LED-T-CH1-EC | End caps for Deep Aluminum Channel | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 5 feet | LED-T-CH2 | 45° Angled Aluminum Channel | Includes a diffuser, two end caps, and five screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| |  | 2 pcs | LED-T-CH2-EC | End caps for 45° Angled Aluminum Channel | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 2 pcs | LED-T-CL3-PT | 2 Adjustable Clips | Used to mount any aluminum channel Includes 2 pieces, 4 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 2 pcs | LED-T-CL2-PT | 2 Adjustable Clips | Used to mount any aluminum channel Adjusts 50° from center either way Includes 2 pieces, 4 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 3 feet | LED-T-RC | Retrofit Channel | Can be bent to create fixed curves | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 10 pcs | LED-T-CL | Clip | Holds an indoor tape from the underside Includes 10 pieces, 10 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 10 pcs | LED-T-CL1 | Curve Clip | Runs over an indoor tape to secure the angled tape Includes 10 pieces, 10 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |

LED-T-_____

Example: **LED-T-CL3-PT**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050





Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISIBLE® ACCESSORIES

Outdoor mounting accessories

WAC LIGHTING

Responsible Lighting®

| | | | | | |
|---|--------|---------------------|-----------------|--|--------------------------------|
|  | 5 feet | LED-TO24-CH5 | Clear Channel | Rigid, non-flexible channel for mounting to a straight, solid surface. | Pro Outdoor Palette Outdoor |
|  | 10 pcs | LED-TO24-C1 | Mounting Clip 1 | For installation on non-flat surfaces where there is no edge contact. 2 clips per ft are recommended for straight runs. | Pro Outdoor Palette Outdoor |
|  | 10 pcs | LED-TO24-C2 | Mounting Clip 2 | For installation on non-flat surfaces, allows for contact on one edge. 2 clips per ft are recommended for straight runs. | Pro Outdoor Palette Outdoor |
|  | 10 pcs | LED-TO24-C3 | Mounting Clip 3 | For installation on non-flat surfaces, allows for contact on both edges. 2 clips per ft are recommended for straight runs. | Pro Outdoor Palette Outdoor |

LED-TO24-_____

Example: **LED-TO24-C2**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES

Indoor non-color changing electronic accessories

WAC LIGHTING

Responsible Lighting®

| Type | Model | Input | Output | Max Run | Dim | Compatibility |
|---|--|------------------|----------------------------|--------------------|------------|--|
|  <p>Remote <i>Includes a 6 foot lead wire</i></p> | EN-2460-RB2-T EN-24100-RB2-T | 120VAC 120VAC | 24VAC / 60W 24VAC / 96W | 30 feet 40 feet | ELV ELV | Pro, Pro2, Pro3, LITE, Classic |
|  <p>Plug-in <i>Includes a 6 foot lead wire</i></p> | EN-2460-P-AR-T EN-24100-P-AR-T | 120VAC 120VAC | 24VAC / 60W 24VAC / 96W | 30 feet 40 feet | ELV ELV | Pro, Pro2, Pro3, LITE, Classic |
|  <p>Remote 277V <i>Includes a 6 foot lead wire</i></p> | EN-24100-277-RB2-T | 277VAC | 24VDC / 96W | 40 feet | 0-10V | Pro, Pro2, Pro3, LITE, Classic |
|  <p>Touch Panel and Motion Sensor <i>Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer</i></p> | CT-6A-R2 | | | | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  <p>In Wall Rated Extension Cable <i>Extends distance between a hard wired power supply or a wiring box to a tape section.</i></p> | LED-TC-WEXT-144 LED-TC-WEXT-144-WT LED-TC-WEXT-240 LED-TC-WEXT-240-WT | | | | | Black 12 ft White 12 ft Black 20 ft White 20 ft |
|  <p>In Wall Rated Joiner Cable <i>Connects tape sections. 2 female ends. 1 male to male connector included</i></p> | LED-TC-WIC-144 LED-TC-WIC-144-WT LED-TC-WIC-240 LED-TC-WIC-240-WT | | | | | Black 12 ft White 12 ft Black 20 ft White 20 ft |
|  <p>Lead Wire <i>Alternative lengths for plug-in power supplies</i></p> | LED-TC-P-2 LED-TC-P-2-WT LED-TC-P-12 LED-TC-P-12-WT | | | | | Black 2 ft White 2 ft Black 12 ft White 12 ft |
|  <p>Extension Cable <i>Extends distance between a hard wired power supply or a wiring box to a tape section</i></p> | LED-TC-EXT-144 LED-TC-EXT-144-WT | | | | | Black 12 ft White 12 ft |
|  <p>Low Voltage Wiring Box With Feed <i>Neatly houses connectos for up to two wires with 12" female feed</i></p> | LED-TC-B-2 LED-TC-B-2-WT | | | | | Black L: 1½ in W: ¾ in H: 7⁄8 in White L: 1½ in W: ¾ in H: 7⁄8 in |
|  <p>Low Voltage Wiring Box <i>Neatly houses connections for up to two wires</i></p> | LED-T-B | | | | | L: 1½ in W: ¾ in H: 7⁄8 in |
|  <p>Wiring Box With Switch <i>Use when spanning a large gap in a system layout without leaving exposed wiring. Optional switch included</i></p> | TB-S | | | | | L: 6¼ in W: 1½ in H: 1¼ in |

Compatible with Pro, Pro2, Pro3, LITE, Classic

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050



Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES

Indoor non-color changing electronic accessories

WAC LIGHTING


Responsible Lighting®

| | | | |
|---|-----------------------|-------|--------|
|  <p>Joiner Cable</p> <p>Connects tape sections</p> | LED-TC-IC2 | Black | 2 in |
| | LED-TC-IC2-WT | White | 2 in |
| | LED-TC-IC6 | Black | 6 in |
| | LED-TC-IC6-WT | White | 6 in |
| | LED-TC-IC12 | Black | 12 in |
| | LED-TC-IC12-WT | White | 12 in |
| | LED-TC-IC36 | Black | 36 in |
| | LED-TC-IC36-WT | White | 36 in |
| | LED-TC-IC72 | Black | 72 in |
| | LED-TC-IC72-WT | White | 72 in |
|  <p>Male to male connector</p> | LED-TC-MM | Black | 50 Qty |

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette
Change directionality of tape runs and reuse cut ends of tape.

| | | |
|--|---|----------------|
|  <p>3-Way "Y" Connector</p> <p>Connects tape sections</p> | LED-TC-Y LED-TC-Y-WT | Black White |
|  <p>4-Way "X" Connector</p> <p>Connects tape sections</p> | LED-TC-X LED-TC-X-WT | Black White |
|  <p>"L" Connector</p> <p>Connects tape sections</p> | LED-TC-L LED-TC-L-WT | Black White |
|  <p>End cap</p> <p>1 cut and 1 male end cap</p> | LED-TC-EC LED-TC-EC-WT | Black White |

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

| | | |
|--|---|-----------------|
|  <p>Signal Wire</p> <p>Links master and slave controllers. Can be combined for longer lengths</p> | LED-TC24-SW60 LED-TC24-SW120 | 60 in 120 in |
|--|---|-----------------|

Compatible with Palette

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050



Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES


Indoor color changing electronic accessories

WAC LIGHTING

Responsible Lighting®




| Type | Model | Input | Output | Max Run | Dim | Compatibility |
|---------------------------|---|--------|-------------|---------|-----|---|
| Remote Color changing |  EN-2460D-C | 120VAC | 24VDC / 60W | 40 feet | ELV | Includes a 6 foot lead wire Daylight to Sunset, Palette |
| Plug-in Color changing |  EN-2460D-C-P | 120VAC | 24VDC / 60W | 40 feet | ELV | Includes a 6 foot lead wire Daylight to Sunset, Palette |

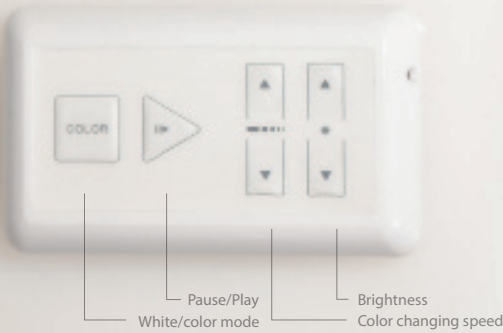





Wireless controller (accessory for wired controller)
LED-TO24-WS



Wired controller
LED-TC-CTR-MSD



| | | | | |
|-------------------------------|--|---|---|---|
| Wired controller |  LED-TC-CTR-MSD | 4 function wired controller with master and slave options | Allows brightness control, preset color selection, or playing a rotation of color transitions with variable speed control | Daylight to Sunset, Palette |
| Wireless Controller |  LED-TO24-WS | 4 function wireless controller (Requires wired controller) | Allows brightness control, preset color selection, or playing a rotation of color transitions with variable speed control | Daylight to Sunset, Palette |
| Touch Panel and Motion Sensor |  CT-6A-R2 | Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |

| | | | | |
|---------------------|--|---|------------------------------------|--|
| Signal Wire |  LED-TC24-SW60 LED-TC24-SW120 | 60 in 120 in | Links master and slave controllers | Daylight to Sunset, Palette |
| Joiner Cable |  LED-TC-IC2 LED-TC-IC6 LED-TC-IC12 LED-TC-IC36 LED-TC-IC72 | 2 in 6 in 12 in 36 in 72 in | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| 3-Way "Y" Connector |  LED-TC-Y | | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| 4-Way "X" Connector |  LED-TC-X | | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| "L" Connector |  LED-TC-L | | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| End cap |  LED-TC-EC | | 1 cut end cap and 1 male end cap | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |

Example: **LED-TC-IC6**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050
















Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES

Outdoor electronic accessories

WAC LIGHTING

Responsible Lighting®

| Type | Model | Input | Output | Max Run | Dim | Compatibility |
|--|--|---|---|---------|-----|---|
| Remote Damp Location  | EN-OD24100-RB2-T | 120VAC | 24VAC / 96W | 30 feet | ELV | Includes a 6 foot lead wire Minimum load of 1W <i>Pro Outdoor</i> |
| Remote Wet Location  | EN-O24100-RB2-T | 120 - 277VAC | 24VDC / 96W | 30 feet | No | Class 2 rated Includes a 6 foot lead wire Minimum load of 1W <i>Pro Outdoor, Palette Outdoor</i> |
| Master Controller  | LED-TO24-CM | 4" x 2" x 1½" | Powers one run up to 40'. Connects and controls all slave controllers for runs over 40' | | | <i>Palette Outdoor</i> |
| Slave Controller  | LED-TO24-CS | 4" x 2" x 1½" | Connects to Master Controller for runs over 40'. Uses a separate 120V power supply. Powers up to another 40'. A Slave Controller is needed for every 40' extension | | | <i>Palette Outdoor</i> |
| Wireless Controller (optional)  | LED-TO24-WS | 4" x 2½" x 5/8" | Wireless connection to Master Controller Use to switch from color changing to white light Play/Pause the color changing effect Control the brightness and speed of the color changing effect Uses 2 AAA batteries | | | <i>Palette Outdoor</i> |
| Touch Panel and Motion Sensor  | CT-6A-R2 | Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer | | | | <i>Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette</i> |
| End cap  | LED-TO24-EC | Use to terminate every run to protect against contaminants. Seal cut end with silicone after adding end cap. | | | | <i>Pro Outdoor, Palette Outdoor</i> |
| 3-Way "Y" Connector  | LED-TO24-Y | Connects tape sections | | | | <i>Pro Outdoor</i> |
| 4-Way "X" Connector  | LED-TO24-X | Connects tape sections | | | | <i>Pro Outdoor</i> |
| Joiner Cable  | LED-TO24-IC6 LED-TO24-IC12 LED-TO24-IC72 LED-TO24-IC120 | 6 in 12 in 72 in 120 in | Extends distance between Power Supply and Master Controller. | | | <i>Pro Outdoor</i> |
| RGB 3-Way "Y" Connector  | LED-TO24-Y-RGB | Connects tape sections | | | | <i>Palette Outdoor</i> |
| RGB 4-Way "X" Connector  | LED-TO24-X-RGB | Connects tape sections | | | | <i>Palette Outdoor</i> |
| RGB Joiner Cable  | LED-TO24-IC6-RGB LED-TO24-IC12-RGB LED-TO24-IC72-RGB LED-TO24-IC120-RGB | 6 in 12 in 72 in 120 in | Use to connect two sections of InvisILED® Outdoor Palette tape. | | | <i>Palette Outdoor</i> |
| Signal wire  | LED-TO24-SW60 LED-TO24-SW120 | 5 feet 10 feet | Connects Master Controller and Slave Controller. | | | <i>Palette Outdoor</i> |
| DMX Signal Wire  | LED-TO24-MW60 LED-TO24-MW120 | 5 feet 10 feet | Connects DMX system to Master Controller. | | | <i>Palette Outdoor</i> |

Example: **LED-TO24-WS**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES

Indoor mounting accessories

WAC LIGHTING

Responsible Lighting®

| | | | | | | |
|---|---|--------|---------------------|--|---|--|
|  |  | 5 feet | LED-T-CH | Aluminum Channel | Includes a diffuser, two end caps, and five screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| |  | 2 pcs | LED-T-CH-EC | End caps for Aluminum Channel | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 5 feet | LED-T-CH1 | Deep Aluminum Channel | Includes a diffuser, two end caps, and five screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| |  | 2 pcs | LED-T-CH1-EC | End caps for Deep Aluminum Channel | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 5 feet | LED-T-CH2 | 45° Angled Aluminum Channel | Includes a diffuser, two end caps, and five screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| |  | 2 pcs | LED-T-CH2-EC | End caps for 45° Angled Aluminum Channel | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 2 pcs | LED-T-CL3-PT | 2 Adjustable Clips | Used to mount any aluminum channel Includes 2 pieces, 4 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 2 pcs | LED-T-CL2-PT | 2 Adjustable Clips | Used to mount any aluminum channel Adjusts 50° from center either way Includes 2 pieces, 4 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 3 feet | LED-T-RC | Retrofit Channel | Can be bent to create fixed curves | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 10 pcs | LED-T-CL | Clip | Holds an indoor tape from the underside Includes 10 pieces, 10 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  |  | 10 pcs | LED-T-CL1 | Curve Clip | Runs over an indoor tape to secure the angled tape Includes 10 pieces, 10 screws | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |

LED-T-_____

Example: **LED-T-CL3-PT**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050





Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISIBLE® ACCESSORIES

Outdoor mounting accessories

WAC LIGHTING

Responsible Lighting®

| | | | | | |
|---|--------|---------------------|-----------------|--|--------------------------------|
|  | 5 feet | LED-TO24-CH5 | Clear Channel | Rigid, non-flexible channel for mounting to a straight, solid surface. | Pro Outdoor Palette Outdoor |
|  | 10 pcs | LED-TO24-C1 | Mounting Clip 1 | For installation on non-flat surfaces where there is no edge contact. 2 clips per ft are recommended for straight runs. | Pro Outdoor Palette Outdoor |
|  | 10 pcs | LED-TO24-C2 | Mounting Clip 2 | For installation on non-flat surfaces, allows for contact on one edge. 2 clips per ft are recommended for straight runs. | Pro Outdoor Palette Outdoor |
|  | 10 pcs | LED-TO24-C3 | Mounting Clip 3 | For installation on non-flat surfaces, allows for contact on both edges. 2 clips per ft are recommended for straight runs. | Pro Outdoor Palette Outdoor |

LED-TO24-_____

Example: **LED-TO24-C2**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES

Indoor non-color changing electronic accessories

WAC LIGHTING

Responsible Lighting®

| Type | Model | Input | Output | Max Run | Dim | Compatibility |
|---|--|------------------|----------------------------|--------------------|------------|--|
|  <p>Remote <i>Includes a 6 foot lead wire</i></p> | EN-2460-RB2-T EN-24100-RB2-T | 120VAC 120VAC | 24VAC / 60W 24VAC / 96W | 30 feet 40 feet | ELV ELV | Pro, Pro2, Pro3, LITE, Classic |
|  <p>Plug-in <i>Includes a 6 foot lead wire</i></p> | EN-2460-P-AR-T EN-24100-P-AR-T | 120VAC 120VAC | 24VAC / 60W 24VAC / 96W | 30 feet 40 feet | ELV ELV | Pro, Pro2, Pro3, LITE, Classic |
|  <p>Remote 277V <i>Includes a 6 foot lead wire</i></p> | EN-24100-277-RB2-T | 277VAC | 24VDC / 96W | 40 feet | 0-10V | Pro, Pro2, Pro3, LITE, Classic |
|  <p>Touch Panel and Motion Sensor <i>Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer</i></p> | CT-6A-R2 | | | | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
|  <p>In Wall Rated Extension Cable <i>Extends distance between a hard wired power supply or a wiring box to a tape section.</i></p> | LED-TC-WEXT-144 LED-TC-WEXT-144-WT LED-TC-WEXT-240 LED-TC-WEXT-240-WT | | | | | Black 12 ft White 12 ft Black 20 ft White 20 ft |
|  <p>In Wall Rated Joiner Cable <i>Connects tape sections. 2 female ends. 1 male to male connector included</i></p> | LED-TC-WIC-144 LED-TC-WIC-144-WT LED-TC-WIC-240 LED-TC-WIC-240-WT | | | | | Black 12 ft White 12 ft Black 20 ft White 20 ft |
|  <p>Lead Wire <i>Alternative lengths for plug-in power supplies</i></p> | LED-TC-P-2 LED-TC-P-2-WT LED-TC-P-12 LED-TC-P-12-WT | | | | | Black 2 ft White 2 ft Black 12 ft White 12 ft |
|  <p>Extension Cable <i>Extends distance between a hard wired power supply or a wiring box to a tape section</i></p> | LED-TC-EXT-144 LED-TC-EXT-144-WT | | | | | Black 12 ft White 12 ft |
|  <p>Low Voltage Wiring Box With Feed <i>Neatly houses connectos for up to two wires with 12" female feed</i></p> | LED-TC-B-2 LED-TC-B-2-WT | | | | | Black L: 1½ in W: ¾ in H: 7⁄8 in White L: 1½ in W: ¾ in H: 7⁄8 in |
|  <p>Low Voltage Wiring Box <i>Neatly houses connections for up to two wires</i></p> | LED-T-B | | | | | L: 1½ in W: ¾ in H: 7⁄8 in |
|  <p>Wiring Box With Switch <i>Use when spanning a large gap in a system layout without leaving exposed wiring. Optional switch included</i></p> | TB-S | | | | | L: 6¼ in W: 1½ in H: 1¼ in |

Compatible with Pro, Pro2, Pro3, LITE, Classic

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050



Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISIBLE® ACCESSORIES

Indoor non-color changing electronic accessories

WAC LIGHTING


Responsible Lighting®

| | | | |
|---|-----------------------|-------|--------|
|  <p>Joiner Cable</p> <p>Connects tape sections</p> | LED-TC-IC2 | Black | 2 in |
| | LED-TC-IC2-WT | White | 2 in |
| | LED-TC-IC6 | Black | 6 in |
| | LED-TC-IC6-WT | White | 6 in |
| | LED-TC-IC12 | Black | 12 in |
| | LED-TC-IC12-WT | White | 12 in |
| | LED-TC-IC36 | Black | 36 in |
| | LED-TC-IC36-WT | White | 36 in |
| | LED-TC-IC72 | Black | 72 in |
| | LED-TC-IC72-WT | White | 72 in |
|  <p>Male to male connector</p> | LED-TC-MM | Black | 50 Qty |

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette
Change directionality of tape runs and reuse cut ends of tape.

| | | |
|--|---|----------------|
|  <p>3-Way "Y" Connector</p> <p>Connects tape sections</p> | LED-TC-Y LED-TC-Y-WT | Black White |
|  <p>4-Way "X" Connector</p> <p>Connects tape sections</p> | LED-TC-X LED-TC-X-WT | Black White |
|  <p>"L" Connector</p> <p>Connects tape sections</p> | LED-TC-L LED-TC-L-WT | Black White |
|  <p>End cap</p> <p>1 cut and 1 male end cap</p> | LED-TC-EC LED-TC-EC-WT | Black White |

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

| | | |
|--|---|-----------------|
|  <p>Signal Wire</p> <p>Links master and slave controllers. Can be combined for longer lengths</p> | LED-TC24-SW60 LED-TC24-SW120 | 60 in 120 in |
|--|---|-----------------|

Compatible with Palette

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050



Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES


Indoor color changing electronic accessories

WAC LIGHTING

Responsible Lighting®




| Type | Model | Input | Output | Max Run | Dim | Compatibility |
|--|---------------------|--------|-------------|---------|-----|--|
| Remote Color changing  | EN-2460D-C | 120VAC | 24VDC / 60W | 40 feet | ELV | Includes a 6 foot lead wire Daylight to Sunset, Palette |
| Plug-in Color changing  | EN-2460D-C-P | 120VAC | 24VDC / 60W | 40 feet | ELV | Includes a 6 foot lead wire Daylight to Sunset, Palette |

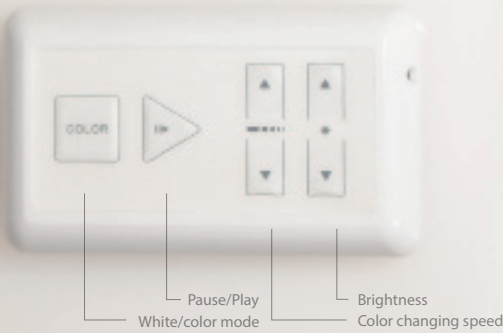





Wireless controller (accessory for wired controller)
LED-TO24-WS



Wired controller
LED-TC-CTR-MSD



| | | | | |
|---|-----------------------|---|---|---|
| Wired controller  | LED-TC-CTR-MSD | 4 function wired controller with master and slave options | Allows brightness control, preset color selection, or playing a rotation of color transitions with variable speed control | Daylight to Sunset, Palette |
| Wireless Controller  | LED-TO24-WS | 4 function wireless controller (Requires wired controller) | Allows brightness control, preset color selection, or playing a rotation of color transitions with variable speed control | Daylight to Sunset, Palette |
| Touch Panel and Motion Sensor  | CT-6A-R2 | Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |

| | | | | |
|---|--|---|------------------------------------|--|
| Signal Wire  | LED-TC24-SW60 LED-TC24-SW120 | 60 in 120 in | Links master and slave controllers | Daylight to Sunset, Palette |
| Joiner Cable  | LED-TC-IC2 LED-TC-IC6 LED-TC-IC12 LED-TC-IC36 LED-TC-IC72 | 2 in 6 in 12 in 36 in 72 in | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| 3-Way "Y" Connector  | LED-TC-Y | | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| 4-Way "X" Connector  | LED-TC-X | | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| "L" Connector  | LED-TC-L | | Connects tape sections | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |
| End cap  | LED-TC-EC | | 1 cut end cap and 1 male end cap | Pro, Pro2, Pro3, LITE, Classic, Daylight to Sunset, Palette |

Example: **LED-TC-IC6**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050
















Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

INVISILED® ACCESSORIES

Outdoor electronic accessories

WAC LIGHTING

Responsible Lighting®

| Type | Model | Input | Output | Max Run | Dim | Compatibility |
|--------------------------------|--|---|---|---------|-----|---|
| Remote Damp Location |  EN-OD24100-RB2-T | 120VAC | 24VAC / 96W | 30 feet | ELV | Includes a 6 foot lead wire Minimum load of 1W Pro Outdoor |
| Remote Wet Location |  EN-O24100-RB2-T | 120 - 277VAC | 24VDC / 96W | 30 feet | No | Class 2 rated Includes a 6 foot lead wire Minimum load of 1W Pro Outdoor, Palette Outdoor |
| Master Controller |  LED-TO24-CM | 4" x 2" x 1½" | Powers one run up to 40'. Connects and controls all slave controllers for runs over 40' | | | Palette Outdoor |
| Slave Controller |  LED-TO24-CS | 4" x 2" x 1½" | Connects to Master Controller for runs over 40'. Uses a separate 120V power supply. Powers up to another 40'. A Slave Controller is needed for every 40' extension | | | Palette Outdoor |
| Wireless Controller (optional) |  LED-TO24-WS | 4" x 2½" x 5/8" | Wireless connection to Master Controller Use to switch from color changing to white light Play/Pause the color changing effect Control the brightness and speed of the color changing effect Uses 2 AAA batteries | | | Palette Outdoor |
| Touch Panel and Motion Sensor |  CT-6A-R2 | Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer | | | | Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette |
| End cap |  LED-TO24-EC | Use to terminate every run to protect against contaminants. Seal cut end with silicone after adding end cap. | | | | Pro Outdoor, Palette Outdoor |
| 3-Way "Y" Connector |  LED-TO24-Y | Connects tape sections | | | | Pro Outdoor |
| 4-Way "X" Connector |  LED-TO24-X | Connects tape sections | | | | Pro Outdoor |
| Joiner Cable |  LED-TO24-IC6 LED-TO24-IC12 LED-TO24-IC72 LED-TO24-IC120 | 6 in 12 in 72 in 120 in | Extends distance between Power Supply and Master Controller. | | | Pro Outdoor |
| RGB 3-Way "Y" Connector |  LED-TO24-Y-RGB | Connects tape sections | | | | Palette Outdoor |
| RGB 4-Way "X" Connector |  LED-TO24-X-RGB | Connects tape sections | | | | Palette Outdoor |
| RGB Joiner Cable |  LED-TO24-IC6-RGB LED-TO24-IC12-RGB LED-TO24-IC72-RGB LED-TO24-IC120-RGB | 6 in 12 in 72 in 120 in | Use to connect two sections of InvisILED® Outdoor Palette tape. | | | Palette Outdoor |
| Signal wire |  LED-TO24-SW60 LED-TO24-SW120 | 5 feet 10 feet | Connects Master Controller and Slave Controller. | | | Palette Outdoor |
| DMX Signal Wire |  LED-TO24-MW60 LED-TO24-MW120 | 5 feet 10 feet | Connects DMX system to Master Controller. | | | Palette Outdoor |

Example: **LED-TO24-WS**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585