

DESCRIPTION

The ALL-PRO™ LED high-performance, low-maintenance entry and patio light provides a dependable and reliable security solution with nighttime ON and daytime OFF settings. Suitable for mounting heights up to 10ft., and up to 75W Incandescent based on area coverage. These fixtures are ideal for new construction residential applications such as entrances, patios, walkways, apartment complexes and light commercial buildings such as outlet exteriors, doorways, storage areas and hotels. The entry and patio light's design and aesthetics is perfect for retrofitting in existing residential and light commercial buildings.

| | | | |
|--------------------|--|-------------|--|
| Catalog # | | Type | |
| Project | | | |
| Comments | | Date | |
| Prepared by | | | |

SPECIFICATION FEATURES

Construction

- Low profile plastic injection molded housing suitable for wet locations
- UV stable frosted polycarbonate lens
- Available in bronze or white finish
- Suitable for recessed residential junction boxes in North America

Electrical


- Maintenance-free LEDs with 25,000 hours of life
- Fixture operating temperature range from -30°C to 40°C
- Integral photo control included
- Electrical operating voltage 120VAC 50/60Hz
- cULus listed for wet locations
- External supply wiring 90°C minimum

Optics

- Diffused lens gives "no glare" useful area light
- 3500K and 5000K color temperature options are perfect for security applications

Warranty

- 2 year limited warranty

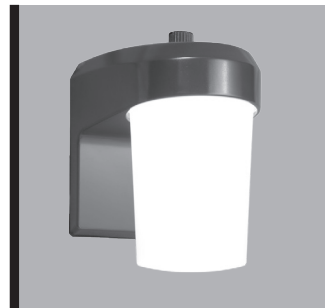


LED ENTRY AND PATIO LIGHT


DIMENSIONS

FE0650LPC, FE1435LPC and FE1450LPC

Front View




Side View

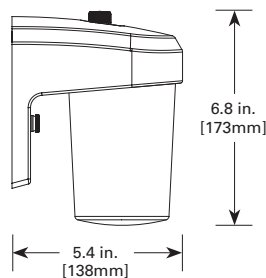


FES0650LPC (only)

Front View



Side View



ORDERING INFORMATION

Sample Number: FE0650 or FES0650

| | | | | | |
|--|---------------------------|--|-----------------------------|--|---|
| Application FE = Entry Light FES = Entry Light, Short lens (650 Lumen only) | Series 06 14 | Color Temperature 50 = 5000K 35 = 3500K* (*14 Series Only) | Lamp Type L = LED | Options PC = Photocontrol *Product is not sold without the photocontrol | Housing Color (blank) = Bronze W = White (650 Lumen version only) |
|--|---------------------------|--|-----------------------------|--|---|


CERTIFICATION DATA

cULus Wet Location Listed
Lighting Facts® Approved

TECHNICAL DATA

-30°C to 40°C Temperature Rating
External Supply Wiring 90° Minimum
Wall and Pole Mount

PHOTOMETRICS

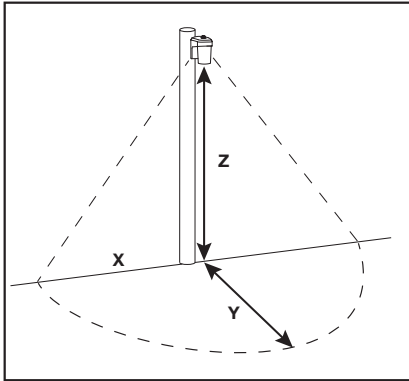

| | | 0.25 Fc Coverage Area | | | | | |
|-----------------|--------|-----------------------|----|----|----|-----|----|
| Mounting Height | | 8 | | 10 | | 15 | |
| Catalog Number | Lumens | X | Y | X | Y | X | Y |
| FE0650 Series | 672 | 13 | 24 | 13 | 24 | 8.5 | 17 |
| FE14 Series | 1241 | 17 | 33 | 17 | 34 | 16 | 32 |

X = Forward Throw
 Y = Wall Spread
 Z = Mounting Heights

Technical Information

| | | Voltage (V) | Power (W) | Delivered Lumens | Efficacy (Lum/Watt) | LED Color Temperature (K) | CRI |
|-------------------------|--------|-------------|-----------|------------------|---------------------|---------------------------|-----|
| FE0650 Series | Bronze | 120 | 11 | 652 | 59 | 5000 | 85 |
| | White | 120 | 11 | 738 | 65 | 5000 | 86 |
| FES0650 Series | Bronze | 120 | 11 | 573 | 52 | 5000 | 85 |
| | White | 120 | 11 | 637 | 56 | 5000 | 87 |
| FE1450LPC Series | Bronze | 120 | 13 | 1170 | 90 | 5000 | 84 |
| FE1435LPC Series | Bronze | 120 | 13.5 | 1275 | 94 | 3500 | 84 |

DESCRIPTION

The ALL-PRO™ LED high-performance, low-maintenance entry and patio light provides a dependable and reliable security solution with nighttime ON and daytime OFF settings. Suitable for mounting heights up to 10ft., and up to 75W Incandescent based on area coverage. These fixtures are ideal for new construction residential applications such as entrances, patios, walkways, apartment complexes and light commercial buildings such as outlet exteriors, doorways, storage areas and hotels. The entry and patio light's design and aesthetics is perfect for retrofitting in existing residential and light commercial buildings.

| | | |
|--------------------|--|-------------|
| Catalog # | | Type |
| Project | | |
| Comments | | Date |
| Prepared by | | |

SPECIFICATION FEATURES

Construction

- Low profile plastic injection molded housing suitable for wet locations
- UV stable frosted polycarbonate lens
- Available in bronze or white finish
- Suitable for recessed residential junction boxes in North America

Electrical


- Maintenance-free LEDs with 25,000 hours of life
- Fixture operating temperature range from -30°C to 40°C
- Integral photo control included
- Electrical operating voltage 120VAC 50/60Hz
- cULus listed for wet locations
- External supply wiring 90°C minimum

Optics

- Diffused lens gives "no glare" useful area light
- 3500K and 5000K color temperature options are perfect for security applications

Warranty

- 2 year limited warranty




LED ENTRY AND PATIO LIGHT


DIMENSIONS

FE0650LPC, FE1435LPC and FE1450LPC

Front View

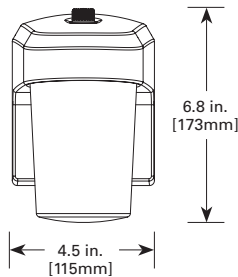


Side View




FES0650LPC (only)

Front View



Side View



ORDERING INFORMATION

Sample Number: FE0650 or FES0650

| | | | | | |
|--|---------------------------|--|-----------------------------|--|---|
| Application FE = Entry Light FES = Entry Light, Short lens (650 Lumen only) | Series 06 14 | Color Temperature 50 = 5000K 35 = 3500K* (*14 Series Only) | Lamp Type L = LED | Options PC = Photocontrol *Product is not sold without the photocontrol | Housing Color (blank) = Bronze W = White (650 Lumen version only) |
|--|---------------------------|--|-----------------------------|--|---|


CERTIFICATION DATA

cULus Wet Location Listed
Lighting Facts® Approved

TECHNICAL DATA

-30°C to 40°C Temperature Rating
External Supply Wiring 90° Minimum
Wall and Pole Mount

PHOTOMETRICS

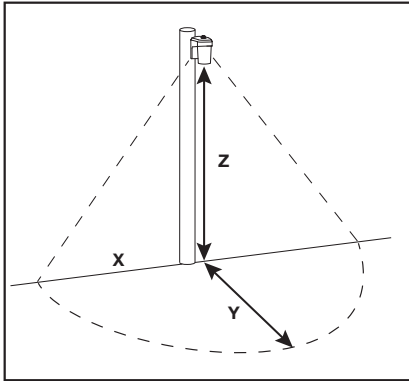

| | | 0.25 Fc Coverage Area | | | | | |
|-----------------|--------|-----------------------|----|----|----|-----|----|
| Mounting Height | | 8 | | 10 | | 15 | |
| Catalog Number | Lumens | X | Y | X | Y | X | Y |
| FE0650 Series | 672 | 13 | 24 | 13 | 24 | 8.5 | 17 |
| FE14 Series | 1241 | 17 | 33 | 17 | 34 | 16 | 32 |

X = Forward Throw
Y = Wall Spread
Z = Mounting Heights

Technical Information

| | | Voltage (V) | Power (W) | Delivered Lumens | Efficacy (Lum/Watt) | LED Color Temperature (K) | CRI |
|-------------------------|--------|-------------|-----------|------------------|---------------------|---------------------------|-----|
| FE0650 Series | Bronze | 120 | 11 | 652 | 59 | 5000 | 85 |
| | White | 120 | 11 | 738 | 65 | 5000 | 86 |
| FES0650 Series | Bronze | 120 | 11 | 573 | 52 | 5000 | 85 |
| | White | 120 | 11 | 637 | 56 | 5000 | 87 |
| FE1450LPC Series | Bronze | 120 | 13 | 1170 | 90 | 5000 | 84 |
| FE1435LPC Series | Bronze | 120 | 13.5 | 1275 | 94 | 3500 | 84 |