JUNO

# 6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

**IC22R**

Project:

Fixture Type:

Location:

Contact/Phone:

## PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol AIR-LOC do not require gasket.

## PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected–see page 2.

**Socket** Medium base porcelain with nickel-plated copper screw shell • Drop socket with spring to accommodate certain trim installation.

**Trims** Trim selection shown on page 2.

**Labels** UL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified • Trims 239, 241 and 242 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.


Specifications subject to change without notice.


## INSTALLATION

**Junction Box** Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1¾" ceiling thickness.

## DIMENSIONS

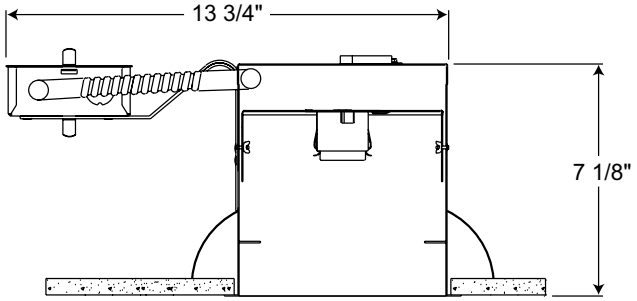

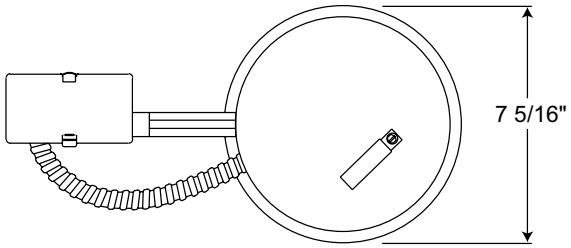
6 3/4" CEILING CUTOUT

**Accessories**

| Catalog Number | Description |
|---|---|
| **ALG6R** | Air-Loc Gasket |

To order, specify catalog number.

## PRODUCT CODES

| Catalog Number | | Input Voltage | Lamp Rating |
|---|---|---|---|
| **IC22R** | 6" Incandescent Remodel IC Housing | 120V | A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See page 2 for max. trim rating) |

Housing and trim can be ordered together or separate, but will always ship separately.


Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17

# 6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

## IC22R

### TRIMS/LAMPS

| | Catalog Number | Description | Max. Lamp Rating |
|---|---|---|---|
| ** | **24 BWH** | Black Baffle, White Trim Ring | 50W PAR30, 75W PAR30L, 65W BR30 |
| | **24 BSC** | Black Baffle, Satin Chrome Trim Ring | |
| | **24 BABZ** | Black Baffle, Classic Aged Bronze Trim Ring | |
| | **24 BBL** | Black Baffle, Black Trim Ring | |
| | **24 WWH** | White Baffle, White Trim Ring | |
| ** | **25 BWH** | Black Baffle, White Trim Ring | 50W PAR30, 65W BR30 |
| | **25 BSC** | Black Baffle, Satin Chrome Trim Ring | |
| | **25 BABZ** | Black Baffle, Classic Aged Bronze Trim Ring | |
| | **25 BBL** | Black Baffle, Black Trim Ring | |
| | **25 WWH** | White Baffle, White Trim Ring | |
| AIR-LOC | **28 BWH ◆◆** | Black Baffle, White Trim Ring | 60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40 |
| | **28 WWH ◆◆** | White Baffle, White Trim Ring | |
| AIR-LOC | **29 CWH ◆◆** | Clear Cone, White Trim Ring | 60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40 |
| | **29 WWH ◆◆** | White Cone, White Trim Ring | |
| ** | **27 CWH** | Clear Alzak® Cone, White Trim Ring | 50W PAR30, 75W PAR30L, 65W BR30 |
| | **27 GWH** | Gold Cone, White Trim Ring | |
| | **27 BWH** | Black Cone, White Trim Ring | |
| | **27 PTSC** | Pewter Cone, Satin Chrome Trim Ring | |
| | **27 WWH** | White Cone, White Trim Ring | |
| | **27 HZWH** | Haze Cone, White Trim Ring | |
| | **27 WHZWH** | Wheat Haze Cone, White Trim Ring | |
| | **27 WHZABZ** | Wheat Haze Cone, Classic Aged Bronze Trim Ring | |
| AIR-LOC ** | **244S BWH** | Black Baffle, White Trim Ring | 75W PAR30L, 60W PAR30, 65W BR30 |
| | **244S WWH** | White Baffle, White Trim Ring | |
| AIR-LOC ** | **247S CWH** | Clear Alzak® Cone, White Trim Ring | 75W PAR30L, 65W BR30, 75W PAR30 |
| | **247S GWH** | Gold Alzak® Cone, White Trim Ring | |
| | **247S BWH** | Black Alzak® Cone, White Trim Ring | |
| | **247S HZWH** | Haze Cone, White Trim Ring | |
| | **247S WHZWH** | Wheat Haze Cone, White Trim Ring | |
| | **250 WH** | Open Frame, White | 65W BR30 |
| | **250 SC** | Open Frame, Satin Chrome | |
| | **250 ABZ** | Open Frame, Classic Aged Bronze | |
| | **252 WH** | Regressed Open Frame, White | 75W R/BR30 |
| | **231 CWH** | Clear Alzak®, White Trim Ring | 60W A19 |
| | **231 GWH** | Gold Alzak®, White Trim Ring | |
| | **231 WWH** | White, White Trim Ring | |
| | **226 BWH** | Cylinder Spotlight, Black Baffle, White Trim Ring | 60W PAR16 |
| | **226 WWH** | Cylinder Spotlight, White Baffle, White Trim Ring | |
| | **228 WH** | Regressed Eyeball, White | 50W PAR20/R20 |
| | **229 WH** | Regressed Eyeball, White | 75W PAR30L, 65W BR30 |
| | **229 SC** | Regressed Eyeball, Satin Chrome | |
| | **229 ABZ** | Regressed Eyeball, Classic Aged Bronze | |
| | **229 BL** | Regressed Eyeball, Black | |
| | **248 WWH** | Regressed Eyeball, White Baffle, White Trim Ring | 50W PAR20/R20 |
| | **249 BWH** | Regressed Eyeball, Black Baffle, White Trim Ring | 75W PAR30L, 65W BR30 |
| | **249 WWH** | Regressed Eyeball, White Baffle, White Trim Ring | |
| ** | **264 BWH** | Adjustable, Black Baffle, White Trim Ring | 50W PAR30 |
| | **264 WWH** | Adjustable, White Baffle, White Trim Ring | |
| ** | **267 CWH** | Clear Alzak® Cone, White Trim Ring | 50W PAR30 |
| | **267 GWH** | Gold Alzak® Cone, White Trim Ring | |
| | **267 BWH** | Black Alzak® Cone, Whit Trim Ring | |
| | **267 HZWH** | Haze Cone, White Trim Ring | |
| | **267 WHZWH** | Wheat Haze Cone, White Trim Ring | |

| | Catalog Number | Description | Max. Lamp Rating |
|---|---|---|---|
| AIR-LOC | **239 WH ◆** | Frosted Lens, White | 40W A19 |
| AIR-LOC | **241 WH ◆** | Drop Opal w/Reflector, White | 40W A19 |
| | **241 PW ◆** | Drop Opal w/Reflector, Plastic White | |
| AIR-LOC | **242 WH ◆** | Frosted Lens w/Clear Center, White | 45W PAR38 |
| | **242 SC ◆** | Satin Chrome | |
| | **242 ABZ ◆** | Classic Aged Bronze | |
| | **9324 SC** | Luminous Frosted Disc, Satin Chrome | 50W PAR30, 65W BR30 |
| | **9702** | Luminous Collar (Frosted) | 50W PAR30, 65W BR30, 75W PAR30L |
| | **9024 WWH** | Octagonal, White, White Trim Ring | 50W PAR30, 65W BR30, |
| | **9524 SC** | Metal Band, Satin Chrome | 65W BR30, 50W PAR30, 75W PAR30L |

Trim Size: 7⅝" O.D. (except Cat. Nos. 228, 229, 241, 9024, - 8" O.D., Cat. No. 9702 - 7¾" O.D.).
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.

◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 27, 244S, 247S, 264, 267 trims.

Housing and trim can be ordered together or separate, but will always ship separately.

 ©2017 Acuity Brands Lighting, Inc. 

JUNO

# 6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

**IC22R**

Project:

Fixture Type:

Location:

Contact/Phone:

## PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol AIR-LOC do not require gasket.

## PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected–see page 2.

**Socket** Medium base porcelain with nickel-plated copper screw shell • Drop socket with spring to accommodate certain trim installation.

**Trims** Trim selection shown on page 2.

**Labels** UL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified • Trims 239, 241 and 242 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.


Specifications subject to change without notice.


## INSTALLATION

**Junction Box** Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1¾" ceiling thickness.

## DIMENSIONS

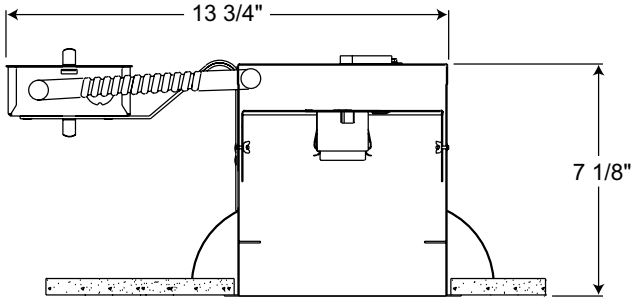

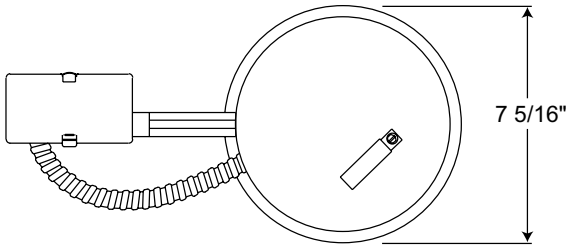
6 3/4" CEILING CUTOUT

**Accessories**

| Catalog Number | Description |
|---|---|
| **ALG6R** | Air-Loc Gasket |

To order, specify catalog number.

## PRODUCT CODES

| Catalog Number | | Input Voltage | Lamp Rating |
|---|---|---|---|
| **IC22R** | 6" Incandescent Remodel IC Housing | 120V | A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See page 2 for max. trim rating) |

Housing and trim can be ordered together or separate, but will always ship separately.


Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17

# 6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

## IC22R

### TRIMS/LAMPS

| | Catalog Number | Description | Max. Lamp Rating |
|---|---|---|---|
| ** | **24 BWH** | Black Baffle, White Trim Ring | 50W PAR30, 75W PAR30L, 65W BR30 |
| | **24 BSC** | Black Baffle, Satin Chrome Trim Ring | |
| | **24 BABZ** | Black Baffle, Classic Aged Bronze Trim Ring | |
| | **24 BBL** | Black Baffle, Black Trim Ring | |
| | **24 WWH** | White Baffle, White Trim Ring | |
| ** | **25 BWH** | Black Baffle, White Trim Ring | 50W PAR30, 65W BR30 |
| | **25 BSC** | Black Baffle, Satin Chrome Trim Ring | |
| | **25 BABZ** | Black Baffle, Classic Aged Bronze Trim Ring | |
| | **25 BBL** | Black Baffle, Black Trim Ring | |
| | **25 WWH** | White Baffle, White Trim Ring | |
| AIR-LOC | **28 BWH ◆◆** | Black Baffle, White Trim Ring | 60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40 |
| | **28 WWH ◆◆** | White Baffle, White Trim Ring | |
| AIR-LOC | **29 CWH ◆◆** | Clear Cone, White Trim Ring | 60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40 |
| | **29 WWH ◆◆** | White Cone, White Trim Ring | |
| ** | **27 CWH** | Clear Alzak® Cone, White Trim Ring | 50W PAR30, 75W PAR30L, 65W BR30 |
| | **27 GWH** | Gold Cone, White Trim Ring | |
| | **27 BWH** | Black Cone, White Trim Ring | |
| | **27 PTSC** | Pewter Cone, Satin Chrome Trim Ring | |
| | **27 WWH** | White Cone, White Trim Ring | |
| | **27 HZWH** | Haze Cone, White Trim Ring | |
| | **27 WHZWH** | Wheat Haze Cone, White Trim Ring | |
| | **27 WHZABZ** | Wheat Haze Cone, Classic Aged Bronze Trim Ring | |
| AIR-LOC ** | **244S BWH** | Black Baffle, White Trim Ring | 75W PAR30L, 60W PAR30, 65W BR30 |
| | **244S WWH** | White Baffle, White Trim Ring | |
| AIR-LOC ** | **247S CWH** | Clear Alzak® Cone, White Trim Ring | 75W PAR30L, 65W BR30, 75W PAR30 |
| | **247S GWH** | Gold Alzak® Cone, White Trim Ring | |
| | **247S BWH** | Black Alzak® Cone, White Trim Ring | |
| | **247S HZWH** | Haze Cone, White Trim Ring | |
| | **247S WHZWH** | Wheat Haze Cone, White Trim Ring | |
| | **250 WH** | Open Frame, White | 65W BR30 |
| | **250 SC** | Open Frame, Satin Chrome | |
| | **250 ABZ** | Open Frame, Classic Aged Bronze | |
| | **252 WH** | Regressed Open Frame, White | 75W R/BR30 |
| | **231 CWH** | Clear Alzak®, White Trim Ring | 60W A19 |
| | **231 GWH** | Gold Alzak®, White Trim Ring | |
| | **231 WWH** | White, White Trim Ring | |
| | **226 BWH** | Cylinder Spotlight, Black Baffle, White Trim Ring | 60W PAR16 |
| | **226 WWH** | Cylinder Spotlight, White Baffle, White Trim Ring | |
| | **228 WH** | Regressed Eyeball, White | 50W PAR20/R20 |
| | **229 WH** | Regressed Eyeball, White | 75W PAR30L, 65W BR30 |
| | **229 SC** | Regressed Eyeball, Satin Chrome | |
| | **229 ABZ** | Regressed Eyeball, Classic Aged Bronze | |
| | **229 BL** | Regressed Eyeball, Black | |
| | **248 WWH** | Regressed Eyeball, White Baffle, White Trim Ring | 50W PAR20/R20 |
| | **249 BWH** | Regressed Eyeball, Black Baffle, White Trim Ring | 75W PAR30L, 65W BR30 |
| | **249 WWH** | Regressed Eyeball, White Baffle, White Trim Ring | |
| ** | **264 BWH** | Adjustable, Black Baffle, White Trim Ring | 50W PAR30 |
| | **264 WWH** | Adjustable, White Baffle, White Trim Ring | |
| ** | **267 CWH** | Clear Alzak® Cone, White Trim Ring | 50W PAR30 |
| | **267 GWH** | Gold Alzak® Cone, White Trim Ring | |
| | **267 BWH** | Black Alzak® Cone, Whit Trim Ring | |
| | **267 HZWH** | Haze Cone, White Trim Ring | |
| | **267 WHZWH** | Wheat Haze Cone, White Trim Ring | |

| | Catalog Number | Description | Max. Lamp Rating |
|---|---|---|---|
| AIR-LOC | **239 WH ◆** | Frosted Lens, White | 40W A19 |
| AIR-LOC | **241 WH ◆** | Drop Opal w/Reflector, White | 40W A19 |
| | **241 PW ◆** | Drop Opal w/Reflector, Plastic White | |
| AIR-LOC | **242 WH ◆** | Frosted Lens w/Clear Center, White | 45W PAR38 |
| | **242 SC ◆** | Satin Chrome | |
| | **242 ABZ ◆** | Classic Aged Bronze | |
| | **9324 SC** | Luminous Frosted Disc, Satin Chrome | 50W PAR30, 65W BR30 |
| | **9702** | Luminous Collar (Frosted) | 50W PAR30, 65W BR30, 75W PAR30L |
| | **9024 WWH** | Octagonal, White, White Trim Ring | 50W PAR30, 65W BR30, |
| | **9524 SC** | Metal Band, Satin Chrome | 65W BR30, 50W PAR30, 75W PAR30L |

Trim Size: 7⅝" O.D. (except Cat. Nos. 228, 229, 241, 9024, - 8" O.D., Cat. No. 9702 - 7¾" O.D.).
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.

◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 27, 244S, 247S, 264, 267 trims.

Housing and trim can be ordered together or separate, but will always ship separately.

 ©2017 Acuity Brands Lighting, Inc. 