ELLIOTT ELECTRIC SUPPLY

We Deliver...Lower Cost, Quality Products, & Personal Service

2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685



ICTC113 STEP LIGHT (NEEDS 840WH

LITHONIA LIGHTING - ACUITY

Catalog Number	ICTC113
Manufacturer	LITHONIA LIGHTING - ACUITY
Description	The IC-rated step light/night light housing for incandescent lamps is designed for use indoors in insulated and non-insulated areas.
Weight per unit	1.3 (lbs/each)
Product Category	Step Lights

Features

Lamp Type	Incandescent
Maximum Operating Temperature	25
Shape	Rectangular

Dimensions and Weight

Height	5
Length	14
Width	8

Descriptions

Construction	New Construction
Description	STEP LIGHT (NEEDS 840WH
Long Description	The IC-rated step light/night light housing for incandescent lamps is designed for use indoors in insulated and non-insulated areas.
Product Type	Incandescent Step Lights
	Step Light
Extra Long Description	LITH ICTC113 Incandescent Step Ligh

Manufacturer Information

Brand	JUNO
	Acuity Brands
GTIN	00661209102027
Manufacturers Part Number	ICTC113
UPC	784231

Packaging

Carton	1
Weight	0.856
Weight Per Each	1.3 (lbs/each)

Uses, Certifications, and Standards

Application	Education,Government,Healthcare,Hospitality,House of Worship,Offices & Banks,Residential,Retail
Mounting	Recessed
Environmental Conditions	Indoor
Standard	CSA,UL

JUNO

Project:

Fixture Type:

Location:

Contact/Phone:

INCANDESCENT LOUVERED NIGHT LIGHT

INCANDESCENT LAMP

ICTC113

PRODUCT DESCRIPTION

ICTC Housing designed for use in insulated or non-insulated areas. Refer to lamp data for correct lamp wattage.

PRODUCT SPECIFICATIONS

Lamp IC - One 25W A19 lamp • TC - One 40W A19 lamp.

Socket Medium base porcelain with nickel-plated copper screw shell.

Trims Available in white baked enamel on steel • Fastens to housing with two torsion springs.

Labels UL listed for damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.


INSTALLATION

Real Nail 3 Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail® 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

Junction Box Pre-wired junction compartment provided with (3) ½" knockouts, and ground wire, UL Listed, C-UL/CSA certified for No. 12 AWG daisy chain circuit connectors suitable for 90° C permitted in junction box • Junction compartment provided with removable access plate • Knockouts equipped with pryout slots.

Housing TC housing, 22-gauge white painted steel • 8¼" L x 3½" H x 3½" D.

DIMENSIONS

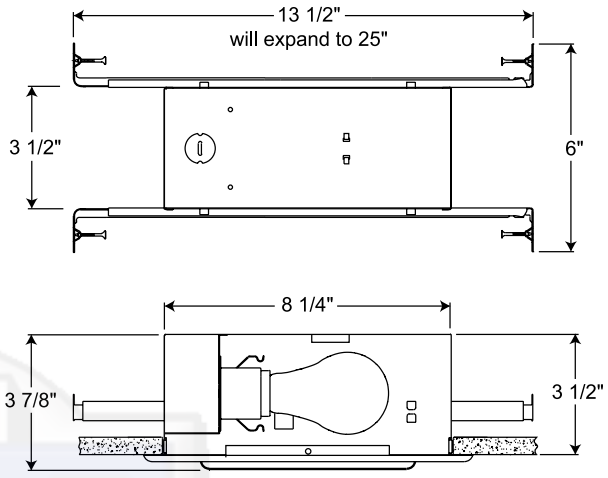

8 3/4" X 3 3/4" WALL CUTOUT

ORDERING INFORMATION: Housing and trim can be ordered together or separate, but will always ship separately.

Example (Housing): **ICTC113**	Example (Trim): **104 WH**	Example (Together): **ICTC113 104 WH**

Series

ICTC113

Trims

104 Diffuse Glass Lens Step Light Trim



840 Angled Louvers Step Light Trim



Trim Finish

WH White

Trim Size: 9 9/16" L x 4 7/8" H
Lamp Rating: 7W or 9W Twin Tube CFL.

Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17