

# LINEAR LED KITS

## 2x2 AND 2x4 INDOOR TROFFERS

# FUTURE FIT

LED KITS

### DESCRIPTION

UL 1598C Classified LED retrofit kit. Includes the following components:



- (1) LED Driver • (2) LED Modules • Mounting Accessories (Jumper Wires, Tek Screws with Rubber Grommets, Power Quick-Disconnect)



### APPLICATION

Upgrade indoor troffer fluorescent-style luminaires to an LED solution. Suitable for after-market or OEM installation. (OEM must have UL LED Luminaire General Coverage file.)

### TYPICAL FIXTURE APPLICATION

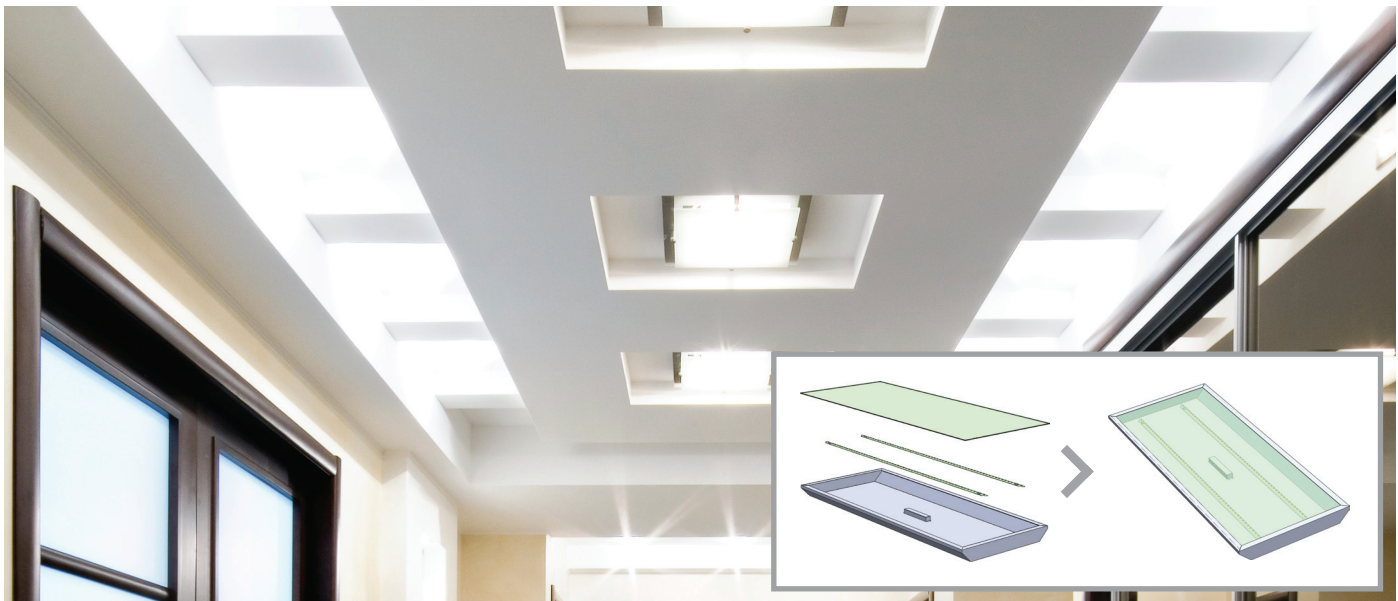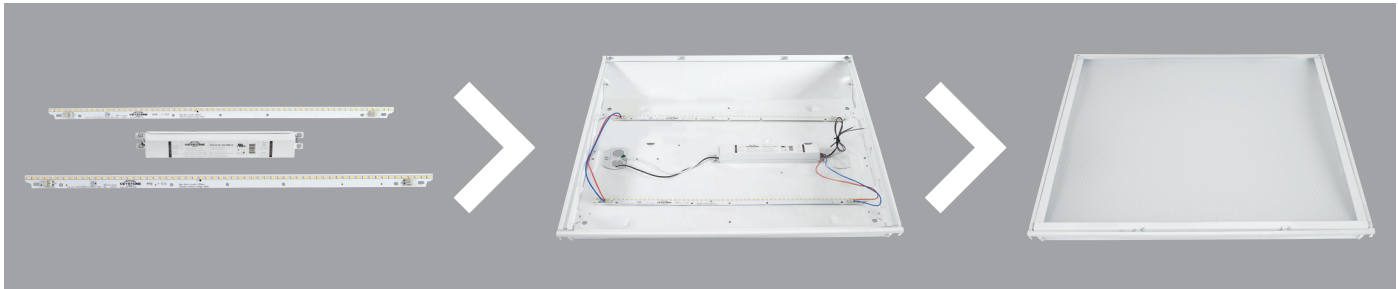

### SYSTEM FEATURES

#### Module Features

- For Use in Class 2 Lighting Systems
- Highly Reflective White Soldermask
- Low Profile WAGO Push Connectors
- UL Recognized Components
- Single-Sided CEM3 Substrate
- 3-Step MacAdam Color Binning
- LM80 Tested LEDs by Samsung
- Beam Angle: 120°
- Reported Life Expectancy: L70 > 36,000 hours at Tc <85°C
- Calculated Life Expectancy: L70 = 93,000 hours at Tc <85°C
- Maximum Board Temperature at Tc Point: 85°C

#### Driver Features

- 120-277V Input, High Power Factor, 0-10V Dimming
- UL 8750 Recognized Component LED Power Unit
- Meets FCC Part 15 Class B (Consumer) Limit for EMI
- Over Current, Short Circuit, and Open Circuit Protection
- Class 2 Output
- Type 1 Outdoor, Suitable for Dry and Damp Locations
- Up to 194°F/90°C Maximum Case Temperature
- THO: <20%

Specifications subject to change. Last revised on 2.23.18

# LINEAR LED KITS

## 2x2 AND 2x4 INDOOR TROFFERS

### PERFORMANCE SPECIFICATIONS

#### 2x4, 4000 LUMEN LINEAR

Dimming Type: 0-10V

**KIT CONTENTS:**

**Driver:** (1) KTLD-40-UV-1100-VDIM-L9

**Module:** (2) KTLM-1080-L6-8xx-81B

**Mounting Hardware and Accessories**

Color Temp	Input Voltage	LED Retrofit Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	KT-RKIT-24-4000-835-VDIM	2	1100mA	550mA	3820	30W	127 lm/W	82%	36.5W	105 lm/W
4000K	120-277V	KT-RKIT-24-4000-840-VDIM	2	1100mA	550mA	3860	30W	129 lm/W	82%	36.5W	106 lm/W
5000K	120-277V	KT-RKIT-24-4000-850-VDIM	2	1100mA	550mA	4000	30W	133 lm/W	82%	36.5W	110 lm/W

#### 2x4, 5000 LUMEN LINEAR

Dimming Type: 0-10V

**KIT CONTENTS:**

**Driver:** (1) KTLD-40-UV-1100-VDIM-L9

**Module:** (2) KTLM-1080-L6-8xx-99B

**Mounting Hardware and Accessories**

Color Temp	Input Voltage	LED Retrofit Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	KT-RKIT-24-5000-835-VDIM	2	1100mA	550mA	4680	36W	130 lm/W	82%	44W	106 lm/W
4000K	120-277V	KT-RKIT-24-5000-840-VDIM	2	1100mA	550mA	4800	36W	133 lm/W	82%	44W	109 lm/W
5000K	120-277V	KT-RKIT-24-5000-850-VDIM	2	1100mA	550mA	5000	36W	139 lm/W	82%	44W	114 lm/W

#### 2x2, 4000 LUMEN LINEAR

Dimming Type: 0-10V

**KIT CONTENTS:**

**Driver:** (1) KTLD-40-UV-1100-VDIM-L9

**Module:** (2) KTLM-1080-L2-8xx-81B


**Mounting Hardware and Accessories**

Color Temp	Input Voltage	LED Retrofit Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	KT-RKIT-22-4000-835-VDIM	2	1100mA	550mA	3820	30W	127 lm/W	82%	36.5W	105 lm/W
4000K	120-277V	KT-RKIT-22-4000-840-VDIM	2	1100mA	550mA	3860	30W	129 lm/W	82%	36.5W	106 lm/W
5000K	120-277V	KT-RKIT-22-4000-850-VDIM	2	1100mA	550mA	4000	30W	133 lm/W	82%	36.5W	110 lm/W

### PHYSICAL SPECIFICATIONS

#### 2' LED MODULE


Part No. KTLM-1080-L2-8xx-81B

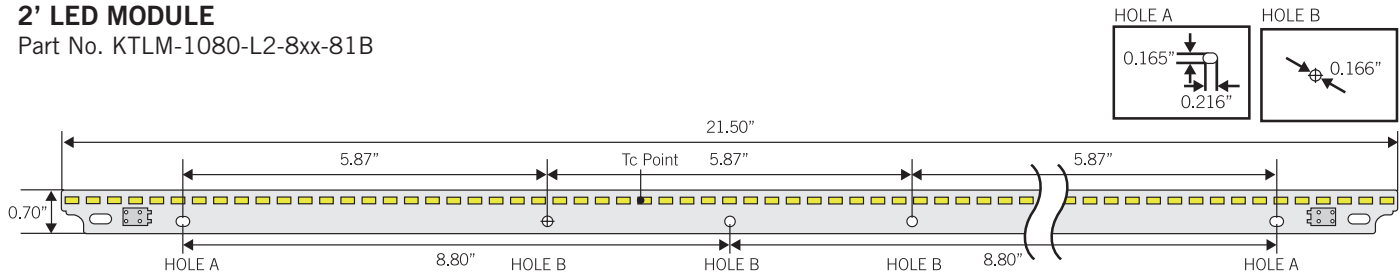


#### 4' LED MODULES

Part No. KTLM-1080-L6-8xx-81B and Part No. KTLM-1080-L6-8xx-99B

Note: LEDs on modules below are to show placement only.

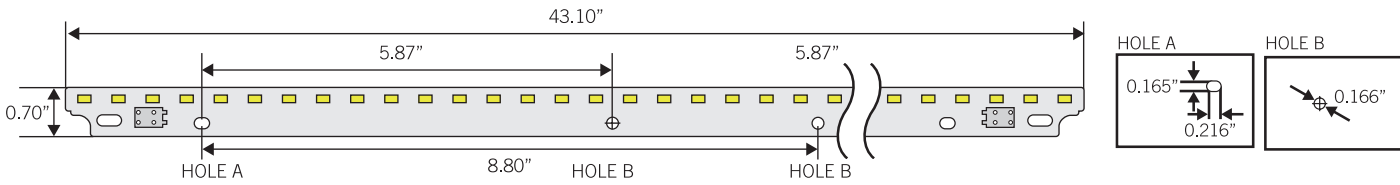

#### LED DRIVER



LENGTH	9.57"
WIDTH	1.13"
HEIGHT	1.07"
MOUNTING	8.90"

### ORDERING INFORMATION

Order Code	Packaging Style	Package Quantity	Item Status
KT-RKIT-24-4000-8xx-VDIM-BP	Bulk Packaged	20	Quick Ship
KT-RKIT-24-4000-8xx-VDIM-IP	Individually Packaged	1	Quick Ship
KT-RKIT-24-5000-8xx-VDIM-BP	Bulk Packaged	20	Quick Ship
KT-RKIT-24-5000-8xx-VDIM-IP	Individually Packaged	1	Quick Ship
KT-RKIT-22-4000-8xx-VDIM-BP	Bulk Packaged	20	Quick Ship
KT-RKIT-22-4000-8xx-VDIM-IP	Individually Packaged	1	Quick Ship

### CATALOG NUMBER BREAKDOWN

## KT-RKIT-24-4000-840-VDIM

**1** **2** **3** **4** **5** **6** **7**

**1** Keystone Technologies

**2** Retrofit Kit

**3** Nominal Size: 24 = 2'x 4' Troffer; 22 = 2'x 2' Troffer

**4** Nominal Lumens

**5** CRI: 8 = 800 Series

**6** CCT: 35 = 3500K, 40 = 4000K; 50 = 5000K

**7** Dimming Type: VDIM = 0-10V Dimming

Specifications subject to change. Last revised on 2.23.18

# LINEAR LED KITS

## 2x2 AND 2x4 INDOOR TROFFERS

# FUTURE FIT

LED KITS

### DESCRIPTION

UL 1598C Classified LED retrofit kit. Includes the following components:



- (1) LED Driver • (2) LED Modules • Mounting Accessories (Jumper Wires, Tek Screws with Rubber Grommets, Power Quick-Disconnect)



### APPLICATION

Upgrade indoor troffer fluorescent-style luminaires to an LED solution. Suitable for after-market or OEM installation. (OEM must have UL LED Luminaire General Coverage file.)

### TYPICAL FIXTURE APPLICATION

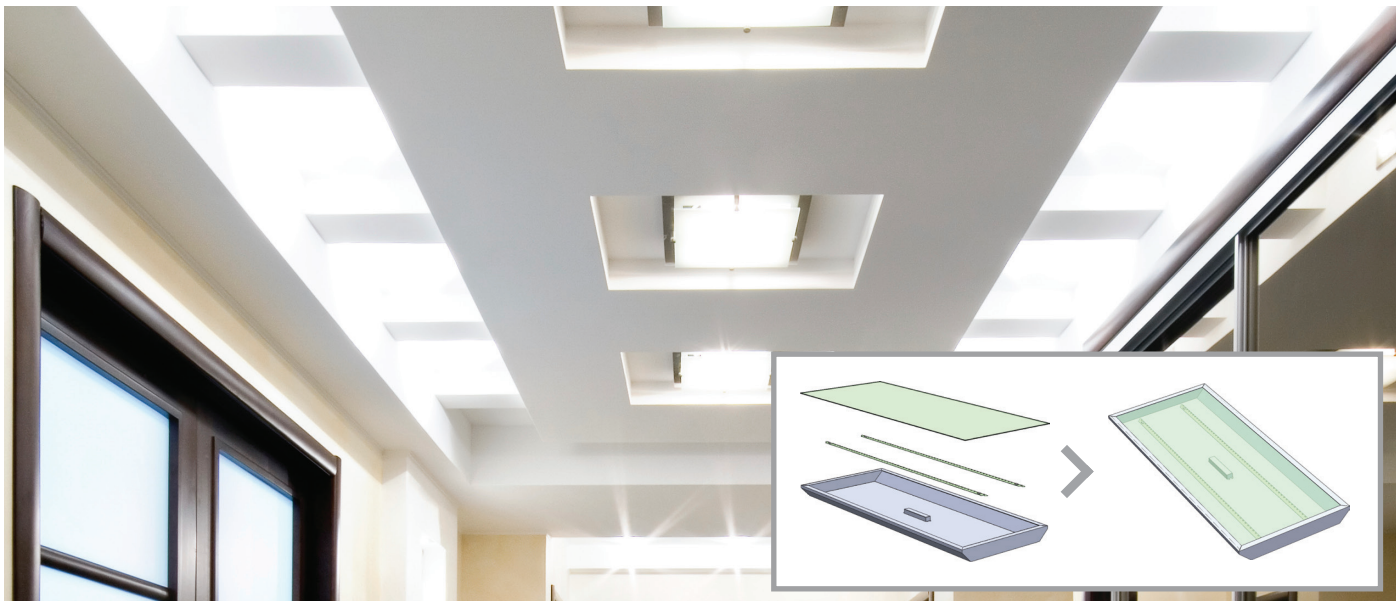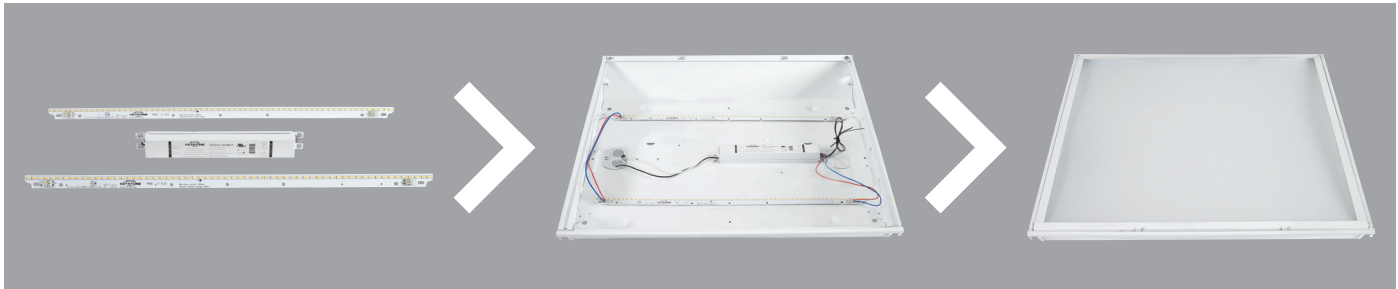

### SYSTEM FEATURES

#### Module Features

- For Use in Class 2 Lighting Systems
- Highly Reflective White Soldermask
- Low Profile WAGO Push Connectors
- UL Recognized Components
- Single-Sided CEM3 Substrate
- 3-Step MacAdam Color Binning
- LM80 Tested LEDs by Samsung
- Beam Angle: 120°
- Reported Life Expectancy: L70 > 36,000 hours at Tc <85°C
- Calculated Life Expectancy: L70 = 93,000 hours at Tc <85°C
- Maximum Board Temperature at Tc Point: 85°C

#### Driver Features

- 120-277V Input, High Power Factor, 0-10V Dimming
- UL 8750 Recognized Component LED Power Unit
- Meets FCC Part 15 Class B (Consumer) Limit for EMI
- Over Current, Short Circuit, and Open Circuit Protection
- Class 2 Output
- Type 1 Outdoor, Suitable for Dry and Damp Locations
- Up to 194°F/90°C Maximum Case Temperature
- THO: <20%

Specifications subject to change. Last revised on 2.23.18

# LINEAR LED KITS

## 2x2 AND 2x4 INDOOR TROFFERS

### PERFORMANCE SPECIFICATIONS

#### 2x4, 4000 LUMEN LINEAR

Dimming Type: 0-10V

**KIT CONTENTS:**

**Driver:** (1) KTLD-40-UV-1100-VDIM-L9

**Module:** (2) KTLM-1080-L6-8xx-81B

**Mounting Hardware and Accessories**

Color Temp	Input Voltage	LED Retrofit Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	KT-RKIT-24-4000-835-VDIM	2	1100mA	550mA	3820	30W	127 lm/W	82%	36.5W	105 lm/W
4000K	120-277V	KT-RKIT-24-4000-840-VDIM	2	1100mA	550mA	3860	30W	129 lm/W	82%	36.5W	106 lm/W
5000K	120-277V	KT-RKIT-24-4000-850-VDIM	2	1100mA	550mA	4000	30W	133 lm/W	82%	36.5W	110 lm/W

#### 2x4, 5000 LUMEN LINEAR

Dimming Type: 0-10V

**KIT CONTENTS:**

**Driver:** (1) KTLD-40-UV-1100-VDIM-L9

**Module:** (2) KTLM-1080-L6-8xx-99B

**Mounting Hardware and Accessories**

Color Temp	Input Voltage	LED Retrofit Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	KT-RKIT-24-5000-835-VDIM	2	1100mA	550mA	4680	36W	130 lm/W	82%	44W	106 lm/W
4000K	120-277V	KT-RKIT-24-5000-840-VDIM	2	1100mA	550mA	4800	36W	133 lm/W	82%	44W	109 lm/W
5000K	120-277V	KT-RKIT-24-5000-850-VDIM	2	1100mA	550mA	5000	36W	139 lm/W	82%	44W	114 lm/W

#### 2x2, 4000 LUMEN LINEAR

Dimming Type: 0-10V

**KIT CONTENTS:**

**Driver:** (1) KTLD-40-UV-1100-VDIM-L9

**Module:** (2) KTLM-1080-L2-8xx-81B


**Mounting Hardware and Accessories**

Color Temp	Input Voltage	LED Retrofit Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	KT-RKIT-22-4000-835-VDIM	2	1100mA	550mA	3820	30W	127 lm/W	82%	36.5W	105 lm/W
4000K	120-277V	KT-RKIT-22-4000-840-VDIM	2	1100mA	550mA	3860	30W	129 lm/W	82%	36.5W	106 lm/W
5000K	120-277V	KT-RKIT-22-4000-850-VDIM	2	1100mA	550mA	4000	30W	133 lm/W	82%	36.5W	110 lm/W

### PHYSICAL SPECIFICATIONS

#### 2' LED MODULE


Part No. KTLM-1080-L2-8xx-81B

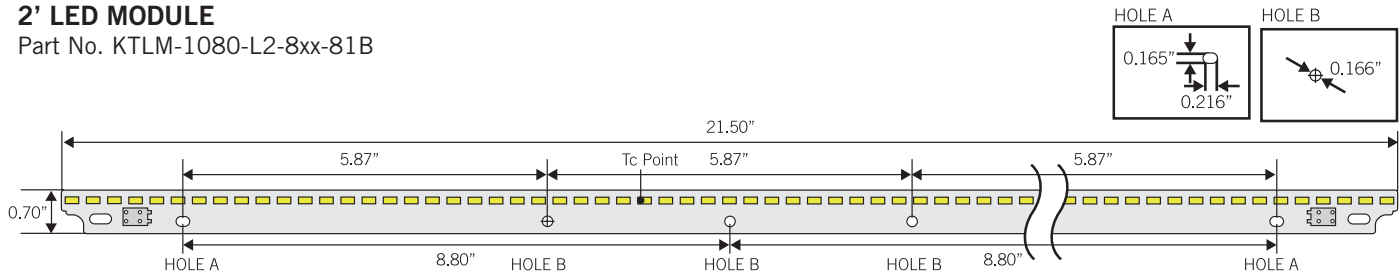


#### 4' LED MODULES

Part No. KTLM-1080-L6-8xx-81B and Part No. KTLM-1080-L6-8xx-99B

Note: LEDs on modules below are to show placement only.

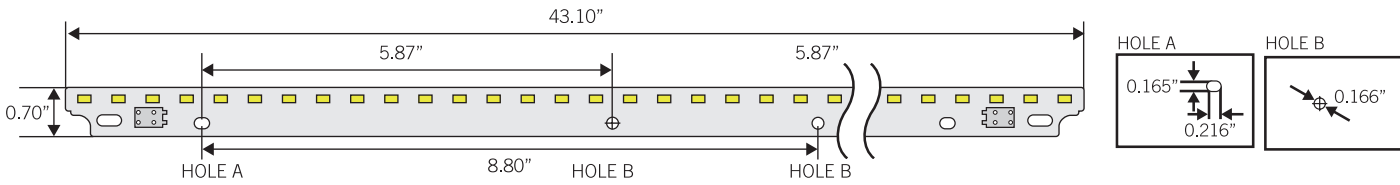

#### LED DRIVER



LENGTH	9.57"
WIDTH	1.13"
HEIGHT	1.07"
MOUNTING	8.90"

#### ORDERING INFORMATION

Order Code	Packaging Style	Package Quantity	Item Status
KT-RKIT-24-4000-8xx-VDIM-BP	Bulk Packaged	20	Quick Ship
KT-RKIT-24-4000-8xx-VDIM-IP	Individually Packaged	1	Quick Ship
KT-RKIT-24-5000-8xx-VDIM-BP	Bulk Packaged	20	Quick Ship
KT-RKIT-24-5000-8xx-VDIM-IP	Individually Packaged	1	Quick Ship
KT-RKIT-22-4000-8xx-VDIM-BP	Bulk Packaged	20	Quick Ship
KT-RKIT-22-4000-8xx-VDIM-IP	Individually Packaged	1	Quick Ship

#### CATALOG NUMBER BREAKDOWN

## KT-RKIT-24-4000-840-VDIM

**1** **2** **3** **4** **5** **6** **7**

**1** Keystone Technologies

**2** Retrofit Kit

**3** Nominal Size: 24 = 2'x 4' Troffer; 22 = 2'x 2' Troffer

**4** Nominal Lumens

**5** CRI: 8 = 800 Series

**6** CCT: 35 = 3500K, 40 = 4000K; 50 = 5000K

**7** Dimming Type: VDIM = 0-10V Dimming

Specifications subject to change. Last revised on 2.23.18