ELLIOTT ELECTRIC SUPPLY
We Deliver...Lower Cost, Quality Products, & Personal Service
2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685



L1620P TURNLOK PLUG 4W 20A 3P 480V

PASS & SEYMOUR/LEGRAND

Catalog Number	L1620P
Manufacturer	PASS & SEYMOUR/LEGRAND
Description	Locking Device Turnlock Plug, 20 A, 480 V, 2 Poles, 3 Wires, Black/White, Nylon Material, -40 °C Operating Temperature, +75 °C Operating Temperature, 2.20 in;0.225 to 1.150 in (Cord) Diameter, Plug Mount, 3.75 in Length, #18 to #8 AWG Wire Size, Impact and Corrosion Resistant, 0.34 lb
Weight per unit	0.3440 (lbs/each)
Product Category	Plugs, Connectors, Inlets, Out

Features

Poles	2
Voltage	480.0 V
Voltage Rating	480
Wire Size	4
Amperage Rating	20
Indoor/Outdoor	Indoor

Dimensions and Weight

Size	3.8 in

Descriptions

Description	TURNLOK PLUG 4W 20A 3P 480V
Features	Locking
	Turnlok Registered Plug 4-Wire 20A 3-Phase 480V
Long Description	Turnlok Registered Plug 4-Wire 20A 3-Phase 480V
Product Type	Turnlok Plug 4WIRE 20A 3-PH 480V
Special Features	Locking Device, impact resistant
Extra Long Description	PAS L1620P TURNLOK PLUG 4WIRE 20A 3

Manufacturer Information

Brand	Pass and Seymour
	LEGRAND-PASS & SEYMOUR
GTIN	00785007162042
Manufacturers Part Number	L1620P
UPC	785007

Taxonomies, Classifications, and Categories

Category Description	Industrial cord connectors
Type	PLUG

Trade Size

Amperage	20.0

2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685

Packaging

Carton	1
Package	10
Weight Per Each	0.3440 (lbs/each)

Uses, Certifications, and Standards

Application	Industrial Spec Grade
Mounting	Plug
Standard	CULUS, UL 498

legrand®


PASS & SEYMOUR®

Turnlok® Extra-Hard Use Plugs & Connectors
4 Wire 20 & 30A; 125 & 250V, 3ø 250 & 480V, 3øY 120/208V

L1420, L1520, L1620, L1820, L1430, L1530, L1630, L1830

Tough enough for industrial environments.

Every component of these durable Turnlok locking plugs and connectors are built to offer the lowest installed cost with maximum durability. Quick-thread assembly screws install four times faster than competitive product and backed-out screws come ready-to-wire. The rugged easy-to-grip nylon housing, clear thermoplastic terminal chambers as well as high-strength brass alloy blades and contacts combine to give Legrandthe premium selection of P&S Turnlok plugs and connectors.

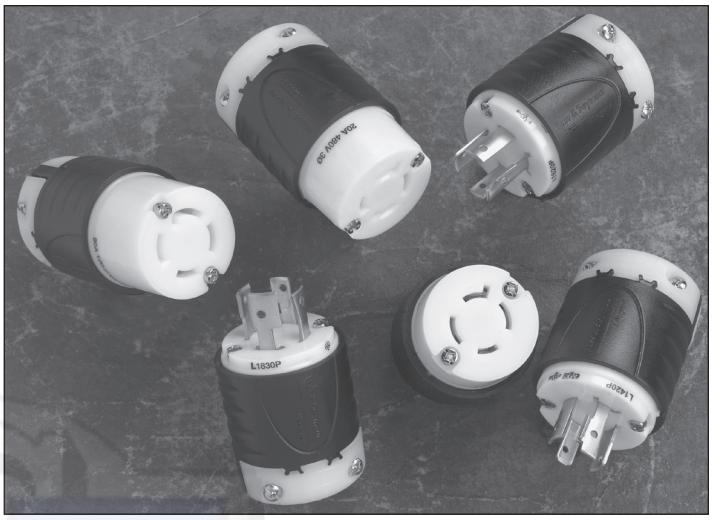

FEATURES & BENEFITS

Rounded back contour reduces snags and hang-ups on the job site.


Visible stamped NEMA configuration and device rating.

Raised ribs provide non-slip gripping profile for turning to lock and unlock.

Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.

Double dovetail design provides superior protection against cord pull-out forces.






L1420C & L1420P

Scallop shell design provides non-slip gripping surface for insertion and withdrawal.

Impact- and corrosion-resistant durable nylon 6/6 shell material.

Quick-thread assembly screws and cord-grip screws come backed-out, ready-to-wire. Installs four times faster.

External cord grips provide visible assurance of safe and proper cord retention.



Integral flexible rubber cord grommet conforms to and seals around SO cord to provide protection from oils, water, or chips entering wiring chamber.

FIELD USES/VERTICAL MARKETS


- Industrial
- Retail
- Health Care
- Office
- Education
- Hospitality/Lodging
- Institutional


PASS & SEYMOUR®

Turnlok® Extra-Hard Use Plugs & Connectors
4 Wire 20 & 30A; 125 & 250V, 3ø 250 & 480V, 3øY 120/208V

ORDERING INFORMATION

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.
Connectors IP20 Suitability					
L1420C	20	125/250	Black Back, White Front Body	.225"-1.150"	L14-20R
L1520C	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20R
L1620C	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20R
L1820C	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-20R
L1430C	30	125/250	Black Back, White Front Body	.225"-1.150"	L14-30R
L1530C	30	3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-30R
L1630C	30	3ø, 480	Black Back, Black Front Body	.225"-1.150"	L16-30R
L1830C	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-30R
Plugs IP20 Suitability					
L1420P	20	125/250	Black Back, White Front Body	.225"-1.150"	L14-20P
L1520P	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20P
L1620P	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20P
L1820P	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-20P
L1430P	30	125/250	Black Back, White Front Body	.225"-1.150"	L14-30P
L1530P	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30P
L1630P	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-30P
L1830P	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-30P

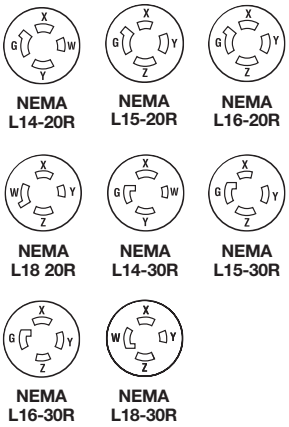

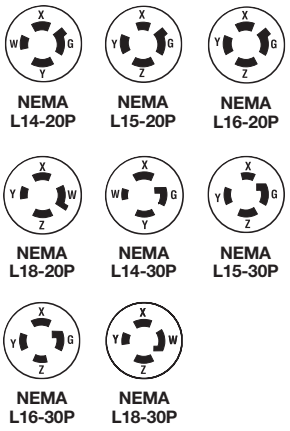

PEP ecoPASSPORT®

Download this product's PEP ecopasport® environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®


Turnlok® Extra-Hard Use Plugs & Connectors
4 Wire 20 & 30A; 125 & 250V, 3ø 250 & 480V, 3øY 120/208V

legrand®


TECHNICAL SPECIFICATIONS

3rd Party Compliance

UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles.
Federal Specification WC596.
CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs.
Conforms to NEMA WD-1 and WD-6.



Dimensions for 20 & 30 Amp Plug



Dimensions for 20 & 30 Amp Connector

Performance

Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	.225"-1.150" diameter
Terminal Identification	"GR" and Green color = Ground, "WH" and White color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	#18 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Super Tough Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Dust Cover	Kraton
Plug Blades	Brass
Connector Contacts	Brass
Terminal Clamp	20A = Nickel-Plated Steel 30A = Brass
Terminal Screws	Brass
Ground Screws	Brass
Cord Clamp Screws	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel

Warranty

1 Year

NOTES

ALSO AVAILABLE...

- USB Charging Devices
- Hospital Grade Devices
- PlugTail™ Devices
- Switches
- Straight Blade Receptacles
- Lighting & Fan Controls
- GFCIs
- Weatherproof Boxes & Covers
- Wall Plates
- Flexcor® Wire Mesh Grips

Electrical Wiring Systems
P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone:905.738.9195
www.legrand.ca

SF1704R3 — Updated January 2016 – For latest specs visit www.legrand.us/passandseymour

© Copyright 2016 All Rights Reserved Legrand EWS/CGXTP