

## Low-Profile Strain Relief Cord Connectors



LPCG50


WHITE SEALING RING MATCHES PRODUCT



LPCG50W



LPCG50BL



**Non-metallic. Liquid-tight. Oil-tight. Furnished with sealing ring and locknut.**

Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry, so there are fewer items to stock. A liquid-tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid-tight seal when installing in non-threaded openings.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503*	50350	1/2	.100-.300	25	100	1.792	.630	1.042
LPCG50W	32875	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG50*	80086	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG507	50354	1/2	.385-.600	25	100	2.178	.517	1.305
LPCG753*	50760	3/4	.100-.300	10	50	1.963	.570	1.042
LPCG754	50762	3/4	.240-.472	10	50	1.963	.570	1.305
LPCG757	36100	3/4	.385-.750	10	50	2.250	.600	1.305
50LPCGBAG▲	55080	1/2	.100-.472	-	500	1.792	.630	1.042
75LPCGBAG▲	55082	3/4	.100-.472	-	100	1.963	.570	1.305

\*UL not applicable for under .240 wire diameter—wire strength will not meet UL's 35 lb test requirements for the fitting.

▲Includes UF grommet 14/2 to 12/2 and cord grommet .100 to .300. Bags not available in black.


When ordering black, add suffix "BL" to catalog number.

When ordering white, add suffix "W" to catalog number.

**PATENTED.**



E105706 LR49636

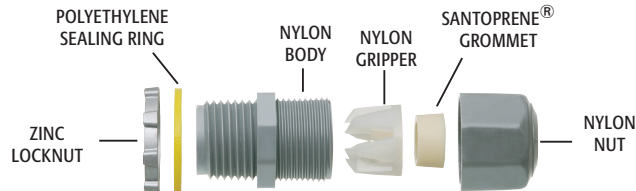

## Low-Profile Strain Relief Cord Connectors



LPCG50


WHITE SEALING RING MATCHES PRODUCT



LPCG50W



LPCG50BL



**Non-metallic. Liquid-tight. Oil-tight. Furnished with sealing ring and locknut.**

Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry, so there are fewer items to stock. A liquid-tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid-tight seal when installing in non-threaded openings.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503*	50350	1/2	.100-.300	25	100	1.792	.630	1.042
LPCG50W	32875	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG50*	80086	1/2	.200-.472	25	100	1.792	.630	1.042
LPCG507	50354	1/2	.385-.600	25	100	2.178	.517	1.305
LPCG753*	50760	3/4	.100-.300	10	50	1.963	.570	1.042
LPCG754	50762	3/4	.240-.472	10	50	1.963	.570	1.305
LPCG757	36100	3/4	.385-.750	10	50	2.250	.600	1.305
50LPCGBAG▲	55080	1/2	.100-.472	-	500	1.792	.630	1.042
75LPCGBAG▲	55082	3/4	.100-.472	-	100	1.963	.570	1.305

\*UL not applicable for under .240 wire diameter—wire strength will not meet UL's 35 lb test requirements for the fitting.

▲Includes UF grommet 14/2 to 12/2 and cord grommet .100 to .300. Bags not available in black.

When ordering black, add suffix "BL" to catalog number.

When ordering white, add suffix "W" to catalog number.

**PATENTED.**



E105706 LR49636

