
Non-Contact Voltage Testers



All models feature a convenient pocket clip.
NCVT7 shown here.

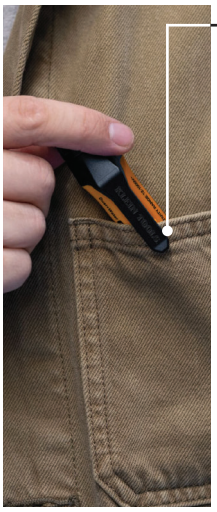


FEATURES	NCVT1P	NCVT7	NCVT2P	NCVT3P	NCVT4IR	NCVT5A	NCVT6
Drop Protection	6.5'	6.5'	6.5'	6.5'	6.5'	6.5'	6.5'
Ingress Protection	IP40	IP54	IP54	IP67	IP54	–	IP40
Safety and Standards	CAT IV 1000V, CE	CAT IV 1000V	CAT IV 1000V, CE	CAT IV 1000V, CE	CAT IV 1000V, CE	CAT IV 1000V	CAT IV 1000V, CE
Voltage	50-1000V AC	12-1000V AC	**Range 1:** 12-1000V AC **Range 2:** 70-1000V AC	**Range 1:** 12-1000V AC **Range 2:** 70-1000V AC	12-1000V AC	**Range 1:** 12-1000V AC **Range 2:** 70-1000V AC	12-1000V AC
Frequency Range	50-500Hz	50-500Hz	50-500Hz	50-500Hz	50-500Hz	50-500Hz	50-500Hz
Audible and Visual Alarms	●	●	●	●	●	●	●
Auto-Power Off	●	●	●	●	●	●	●
NCV Signal Strength Indicator	–	●	–	–	●	–	●
Temperature	–	–	–	–	-22° – 482°F (-30° – 250°C)	–	–
Laser	–	–	–	–	Class 2	Class 3R	Class 2
Flashlight	–	–	–	●	–	–	–
Distance Measuring	–	–	–	–	–	–	●
Display	–	Reverse Contrast Backlit LCD	–	–	Backlit LCD	–	Reverse Contrast Backlit LCD
LED	2-Color	3-Color	3-Color	3-Color	2-Color	2-Color	2-Color
Pocket Clip	●	●	●	●	●	●	●
Batteries Included	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA
Overall Length	5.50" (139.7 mm)	5.80" (147.3 mm)	5.83" (148.0 mm)	5.83" (148.0 mm)	6.25" (158.8 mm)	6.00" (152.4 mm)	6.45" (164 mm)

KLEIN TOOLS®

Specifications subject to change.

© 2026 Klein Tools, Inc. • Lincolnshire, IL 60069 • MKT031720 Rev. 08/26 C

Non-Contact Voltage Testers

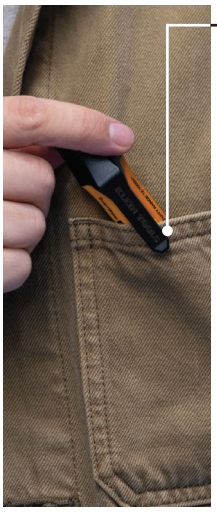

All models feature a convenient pocket clip.
NCVT7 shown here.



FEATURES	NCVT1P	NCVT7	NCVT2P	NCVT3P	NCVT4IR	NCVT5A	NCVT6
Drop Protection	6.5'	6.5'	6.5'	6.5'	6.5'	6.5'	6.5'
Ingress Protection	IP40	IP54	IP54	IP67	IP54	–	IP40
Safety and Standards	CAT IV 1000V, CE	CAT IV 1000V	CAT IV 1000V, CE	CAT IV 1000V, CE	CAT IV 1000V, CE	CAT IV 1000V	CAT IV 1000V, CE
Voltage	50-1000V AC	12-1000V AC	**Range 1:** 12-1000V AC **Range 2:** 70-1000V AC	**Range 1:** 12-1000V AC **Range 2:** 70-1000V AC	12-1000V AC	**Range 1:** 12-1000V AC **Range 2:** 70-1000V AC	12-1000V AC
Frequency Range	50-500Hz	50-500Hz	50-500Hz	50-500Hz	50-500Hz	50-500Hz	50-500Hz
Audible and Visual Alarms	●	●	●	●	●	●	●
Auto-Power Off	●	●	●	●	●	●	●
NCV Signal Strength Indicator	–	●	–	–	●	–	●
Temperature	–	–	–	–	-22° – 482°F (-30° – 250°C)	–	–
Laser	–	–	–	–	Class 2	Class 3R	Class 2
Flashlight	–	–	–	●	–	–	–
Distance Measuring	–	–	–	–	–	–	●
Display	–	Reverse Contrast Backlit LCD	–	–	Backlit LCD	–	Reverse Contrast Backlit LCD
LED	2-Color	3-Color	3-Color	3-Color	2-Color	2-Color	2-Color
Pocket Clip	●	●	●	●	●	●	●
Batteries Included	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA
Overall Length	5.50" (139.7 mm)	5.80" (147.3 mm)	5.83" (148.0 mm)	5.83" (148.0 mm)	6.25" (158.8 mm)	6.00" (152.4 mm)	6.45" (164 mm)

KLEIN TOOLS®

Specifications subject to change.

© 2026 Klein Tools, Inc. • Lincolnshire, IL 60069 • MKT031720 Rev. 08/26 C