WIREMOLD®
Eclipse™ Series Raceways

Small Nonmetallic Raceway Systems
For Communications and Power Applications

Eclipse™ PN03, PN05, and PN10 Series Raceways are single compartment raceways designed for communication or power applications. They are ideal for use in classrooms, offices, and hotel applications, or anywhere a small, low profile raceway is needed.

Eclipse PN03, PN05, and PN10 Series Raceways are specifically designed for the workstation. They accept Ortronics® Series II and TracJack® modules, Pass & Seymour® Activate Series inserts, and Wiremold Open System communication modules.



Eclipse PN05 Series Raceway shown in an office installation.

FEATURES & BENEFITS

- **Available in three sizes.** PN03, PN05, and PN10 provide flexibility for meeting various capacity requirements. Perfect for most small drops and horizontal runs to work stations.
- **Durable, flexible co-extruded hinge construction (on latching profiles).** Allows for repeated openings and closings while maintaining product integrity and aesthetics.
- **Snap-on latching cover.** Provides security with access to wiring for changes or additions.
- **Three standard colors.** Stock colors are ivory, white, and fog white (matches with Ortronics® White). Consult factory for custom colors. Paintable using latex paint.
- **1" (25mm) bend radius compliant fittings.** Full capacity, aesthetically pleasing fittings provide 1" (25mm) bend radius.
- **Adhesive backing for low-voltage (under 50V) applications.** Allows base to be pressed onto surface, speeds installation.
- **Lightweight and easy to handle.** Saves time and labor costs. Standard 8' (2.44m) lengths can be installed by one person.
- **Designed for use with Ortronics® TracJack and Series II modules.** A wide variety of media interface inserts to ensure a reliable, cost-effective activation for the most demanding communication system designs.
- **PSB3 Device Box accommodates wireless.** Designed for use with Ortronics® Wi-Jack™ Wireless Access Points.
- **Accommodates communication or power wiring.** Can be used for communications, computer lines, surveillance systems, fire alarms, outlets, and more.
- **Easy to align.** All base and fittings have unique alignment guides built in to help avoid unsightly gaps and uneven installations. All fitting covers have 1/4" (6.4mm) overlap to hide uneven cuts of raceway.
- **Ceiling fitting slips over suspended ceiling grid.** Saves time and labor by eliminating need to cut metal ceiling grid.
- **FT-4 Flame Spread Rating.** Eclipse™ Raceway meets the definition of “resistant to the spread of fire” in Article 760 of the NEC and is therefore suitable for use with Type NPLF non-power-limited fire alarm cable and Type FPL power-limited fire alarm cable.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing communications interface at the point of use.
- **Ratings:** 600VAC, FT-4 Rated for Canada
- **UL and cUL Listed component raceways.** File E90378 Guide RJTX, Fittings: File E90377 Guide RJYT. Meets Article 386 of NEC and meets Section 12-1600 of CEC.






Eclipse Raceways shown in typical installations.

Eclipse Series PN03, PN05, and PN10 System Layout

A – PN03L08, PN03L10, PN05L08, PN05L10, PN10L08, PN10L10
B – PN03F06, PN05F06, PN10F06
C – PN03F11, PN05F11, PN10F11
D – PN03F15, PN05F15, PN10F15
E – PN03F17, PN05F17, PN10F17
F – PN03F18, PN05F18, PN10F18
G – PN03F19, PN05F19, PN10F19
H – PN05F86, PN10F86
I – PN10F21
J – PSB2
K – PSB1
L – PSB3
M – PDB1CM, PDB1S2, PDB2TJ, PDB2CM, PDB2S2, PDB4TJ, PBB2S2, PBB4TJ
N – PN153R

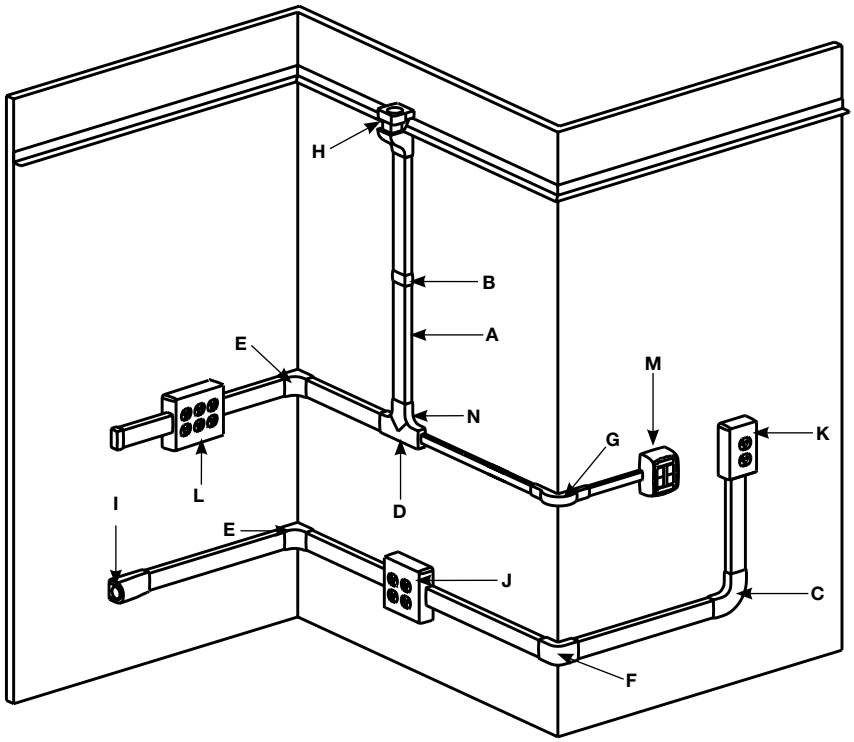

Eclipse Series Raceway Wire Fill Capacities for Communications

	CABLE/WIRE SIZE	O.D. Inches	O.D. (mm)	PN03L 20%*	PN03L 40%**	PN05L 20%*	PN05L 40%**	PN10L 20%*	PN10L 40%**
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG Cat 3	0.190	(4.8)	1	3	3	6	6	13
	4-pair, 24 AWG Cat. 5e	0.210	(5.3)	1	2	2	5	5	11
	4-pair, 24 AWG Cat. 6	0.250	(6.3)	0	1	1	3	4	8
	4-pair, 24 AWG Cat. 6a	0.351	(9.0)	0	0	0	1	2	4
TELEPHONE	2-pair, 24 AWG	0.140	(3.6)	2	5	5	11	12	25
	3-pair, 24 AWG	0.150	(3.8)	2	4	4	9	11	22
	4-pair, 24 AWG	0.190	(4.8)	1	3	3	6	6	13
	25-pair, 24 AWG	0.410	(10.4)	0	0	0	1	1	3
COAXIAL	RG58/U	0.195	(5.0)	1	2	2	5	6	13
	RG59/U	0.242	(6.1)	0	1	1	3	4	8
	RG62/U	0.242	(6.1)	0	1	1	3	4	8
	RG6/U	0.270	(6.9)	0	1	1	3	3	6
TWINAXIAL	100 Ohm	0.330	(8.4)	0	1	1	2	2	4
SHIELDED TWISTED PAIR	TYPE 1	0.390	(9.9)	0	0	0	1	1	3
	TYPE 2	0.465	(11.8)	0	0	0	1	1	2
	TYPE 3	0.245	(6.2)	0	1	1	3	4	8
FIBER	Mini Zip Cord	0.079 x 0.157	(2 x 4)	3	7	7	14	15	31
	Zip Cord	0.118 x 0.236	(3 x 6)	1	3	3	6	7	14
	Round 4 Strand Fiber	0.187	(4.8)	1	3	3	6	7	14
	Round 6 Strand Fiber	0.256	(6.5)	0	1	1	3	3	7


*** 20% cable fill is calculated to approximate reduction in cable capacity due to connectors mounted within raceway and fittings that may restrict cross sectional area.**
**** 40% cable fill is the maximum designed cable fill based on a proposed revision to TIA/EIA 569-A.**

Eclipse Series Raceway Wire Fill Capacities for Power

WIRE SIZE THHN/THWN	O.D. Inches	O.D. (mm)	NUMBER OF CONDUCTORS PN03	PN05	PN10
14 AWG	0.111	(2.8)	8	16	22
12 AWG	0.130	(3.3)	7	14	20
10 AWG	0.164	(4.2)	0	0	19

Eclipse Series PN03, PN05, and PN10 Raceway Profiles

Catalog No./Item	Description/Specifications
PN03L08* **PN03L10**** **PN05L08*** **PN05L10**** **PN10L08*** **PN10L10****	**One-Piece Raceway** – Co-extruded hinged, one-piece raceway.




Cat No.	A	B
PN03L08	1/2" (12.7mm)	13/16" (20.6mm)
PN03L10	1/2" (12.7mm)	13/16" (20.6mm)
PN05L08	5/8" (15.9mm)	1 1/8" (29mm)
PN05L10	5/8" (15.9mm)	1 1/8" (29mm)
PN10L08	13/16" (20.6mm)	1 11/16" (43mm)
PN10L10	13/16" (20.6mm)	1 11/16" (43mm)

*** Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.**
**** 10' (3.05m) lengths available in Fog White finish only.**

Download this product's PEP ecopasport® environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.


Eclipse Series PN03, PN05, and PN10 Surface Nonmetallic Raceway Fittings

Catalog No./Item	Description/Specifications
PN03F06 **PN05F06** **PN10F06**	**Cover Clip** – Covers seam where two lengths of PN03, PN05, or PN10 Series Raceway meet.




Cat No.	A
PN03F06	1" (25mm)
PN05F06	1" (25mm)
PN10F06	1" (25mm)

Catalog No./Item	Description/Specifications
PN03F11 **PN05F11** **PN10F11**	**90° Flat Elbow** – Makes right angle turns on same surface. 1" (25mm) bend radius.



Cat No.	A
PN03F11	2 11/16" (68mm)
PN05F11	2 15/16" (75mm)
PN10F11	3 11/16" (94mm)


Catalog No./Item	Description/Specifications
PN03F15 **PN05F15** **PN10F15**	**Tee** – Branches raceway at right angles on the same surface. 1" (25mm) bend radius.



Cat No.	A	B
PN03F15	2 11/16" (68mm)	4 5/16" (110mm)
PN05F15	2 15/16" (75mm)	4 3/4" (121mm)
PN10F15	3 11/16" (94mm)	5 5/16" (135mm)


NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

Catalog No./Item	Description/Specifications
PN03F17 **PN05F17** **PN10F17**	**Internal Elbow** – Makes right angle turns around internal corners. 1" (25mm) bend radius.




Cat No.	A
PN03F17	2 1/8" (54mm)
PN05F17	2 1/8" (54mm)
PN10F17	2 1/8" (54mm)

Catalog No./Item	Description/Specifications
PN03F18 **PN05F18** **PN10F18**	**External Elbow** – Makes right angle turns around external corners.



Cat No.	A
PN03F18	1 5/8" (41mm)
PN05F18	1 5/8" (41mm)
PN10F18	1 5/8" (41mm)


Catalog No./Item	Description/Specifications
PN03F19 **PN05F19** **PN10F19**	**90° External Elbow** – Makes right angle turns around external corners. 1" (25mm) bend radius.



Cat No.	A	B
PN03F19	15/16" (23.8mm)	3 1/8" (79mm)
PN05F19	1 3/16" (30mm)	3 1/8" (79mm)
PN10F19	1 3/16" (30mm)	3 3/8" (116mm)


Eclipse Series PN03, PN05, and PN10 Surface Nonmetallic Raceway Fittings

Catalog No./Item	Description/Specifications
PN03F20 **PN05F20** **PN10F20**	**Blank End Fitting** – Closes off open end of raceway.




Cat No.	A
PN03F20	11/16" (17.5mm)
PN05F20	11/16" (17.5mm)
PN10F20	11/16" (17.5mm)

Catalog No./Item	Description/Specifications
PN153R	**Reducer Adapter** – Connects PN03 or PN05 Series Raceway to PN10 Series Raceway. Use with a PN10F15 Tee Fitting.




Catalog No./Item	Description/Specifications
PN05F86 **PN10F86**	**Drop Ceiling Connector** – Connects cables from ceiling into PN03, PN05 or PN10 Series Raceway. Includes PN153R Reducer Adapter for use with PN03 Series Raceway.



Cat No.	A	B
PN05F86	1 15/16" (49mm)	4 3/8" (111mm)
PN10F86	2 1/2" (64mm)	4 3/8" (111mm)


Catalog No./Item	Description/Specifications
PN10F21	**Entrance End fitting** – Connects 1/2" and 3/4" trade size conduit or armored cable with PN03, PN05 and PN10 Series Raceway. Includes PN153R Reducer Adapter for use with PN03 and PN05 Series Raceway.




NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

Eclipse Series PN03, PN05, and PN10 Series Device Boxes


Catalog No./Item	Description/Specifications
PSB1	**One-Gang Power Box** – Accepts all standard single-gang NEMA face-plates. Concentric twist-outs on all four sides for PN03, PN05, and PN10 Series Raceway.



Catalog No./Item	Description/Specifications
PSB2	**Two-Gang Device Box** – Accepts all standard two-gang NEMA faceplates. Concentric twist-outs on all four sides for PN03, PN05, and PN10 Series Raceway.











Catalog No./Item	Description/Specifications
PSB3	**Three-Gang Device Box** – Accepts all standard three-gang NEMA faceplates. Concentric twist-outs on all four sides for PN03, PN05, and PN10 Series Raceway. Designed for use with Ortronics® Wi-Jack™ Wireless Access Point.



NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

Eclipse Series PN03, PN05, and PN10 Communication Boxes

Catalog No./Item	Description/Specifications
PBB2S2 	**Bezel Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded outward facing devices including Ortronics® Series II devices
PBB4TJ 	**Bezel Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts four front-loaded outward facing devices including Ortronics® TracJack devices.
PDB1S2 	**Small Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts one front-loaded downward facing device including Ortronics® Series II devices.
PDB1CM 	**Small Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts one front-loaded downward facing device including Pass & Seymour® Activate Series inserts and Wiremold Open System communication modules.

Catalog No./Item	Description/Specifications
PDB2CM 	**Large Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded downward facing devices including Pass & Seymour® Activate Series inserts and Wiremold Open System communication modules.
PDB2S2 	**Large Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded downward facing devices including Ortronics® Series II devices.
PDB2TJ 	**Small Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded downward facing devices including Ortronics® TracJack devices.
PDB4TJ 	**Large Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts four front-loaded downward facing devices including Ortronics® TracJack devices.

NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

NOTES

NOTES

NOTES

NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

NOTE: The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act complaint. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

Electrical Wiring Systems

60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295-3472)
www.legrand.us

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone:905.738.9195
www.legrand.ca

ED1099R12 – Updated October 2016 – For latest specs visit www.legrand.us/wiremold

© Copyright 2016 Legrand All Rights Reserved

WIREMOLD®
Eclipse™ Series Raceways

Small Nonmetallic Raceway Systems
For Communications and Power Applications

Eclipse™ PN03, PN05, and PN10 Series Raceways are single compartment raceways designed for communication or power applications. They are ideal for use in classrooms, offices, and hotel applications, or anywhere a small, low profile raceway is needed.

Eclipse PN03, PN05, and PN10 Series Raceways are specifically designed for the workstation. They accept Ortronics® Series II and TracJack® modules, Pass & Seymour® Activate Series inserts, and Wiremold Open System communication modules.



Eclipse PN05 Series Raceway shown in an office installation.

FEATURES & BENEFITS

- **Available in three sizes.** PN03, PN05, and PN10 provide flexibility for meeting various capacity requirements. Perfect for most small drops and horizontal runs to work stations.
- **Durable, flexible co-extruded hinge construction (on latching profiles).** Allows for repeated openings and closings while maintaining product integrity and aesthetics.
- **Snap-on latching cover.** Provides security with access to wiring for changes or additions.
- **Three standard colors.** Stock colors are ivory, white, and fog white (matches with Ortronics® White). Consult factory for custom colors. Paintable using latex paint.
- **1" (25mm) bend radius compliant fittings.** Full capacity, aesthetically pleasing fittings provide 1" (25mm) bend radius.
- **Adhesive backing for low-voltage (under 50V) applications.** Allows base to be pressed onto surface, speeds installation.
- **Lightweight and easy to handle.** Saves time and labor costs. Standard 8' (2.44m) lengths can be installed by one person.
- **Designed for use with Ortronics® TracJack and Series II modules.** A wide variety of media interface inserts to ensure a reliable, cost-effective activation for the most demanding communication system designs.
- **PSB3 Device Box accommodates wireless.** Designed for use with Ortronics® Wi-Jack™ Wireless Access Points.
- **Accommodates communication or power wiring.** Can be used for communications, computer lines, surveillance systems, fire alarms, outlets, and more.
- **Easy to align.** All base and fittings have unique alignment guides built in to help avoid unsightly gaps and uneven installations. All fitting covers have 1/4" (6.4mm) overlap to hide uneven cuts of raceway.
- **Ceiling fitting slips over suspended ceiling grid.** Saves time and labor by eliminating need to cut metal ceiling grid.
- **FT-4 Flame Spread Rating.** Eclipse™ Raceway meets the definition of “resistant to the spread of fire” in Article 760 of the NEC and is therefore suitable for use with Type NPLF non-power-limited fire alarm cable and Type FPL power-limited fire alarm cable.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing communications interface at the point of use.
- **Ratings:** 600VAC, FT-4 Rated for Canada
- **UL and cUL Listed component raceways.** File E90378 Guide RJTX, Fittings: File E90377 Guide RJYT. Meets Article 386 of NEC and meets Section 12-1600 of CEC.






Eclipse Raceways shown in typical installations.

Eclipse Series PN03, PN05, and PN10 System Layout

A – PN03L08, PN03L10, PN05L08, PN05L10, PN10L08, PN10L10
B – PN03F06, PN05F06, PN10F06
C – PN03F11, PN05F11, PN10F11
D – PN03F15, PN05F15, PN10F15
E – PN03F17, PN05F17, PN10F17
F – PN03F18, PN05F18, PN10F18
G – PN03F19, PN05F19, PN10F19
H – PN05F86, PN10F86
I – PN10F21
J – PSB2
K – PSB1
L – PSB3
M – PDB1CM, PDB1S2, PDB2TJ, PDB2CM, PDB2S2, PDB4TJ, PBB2S2, PBB4TJ
N – PN153R

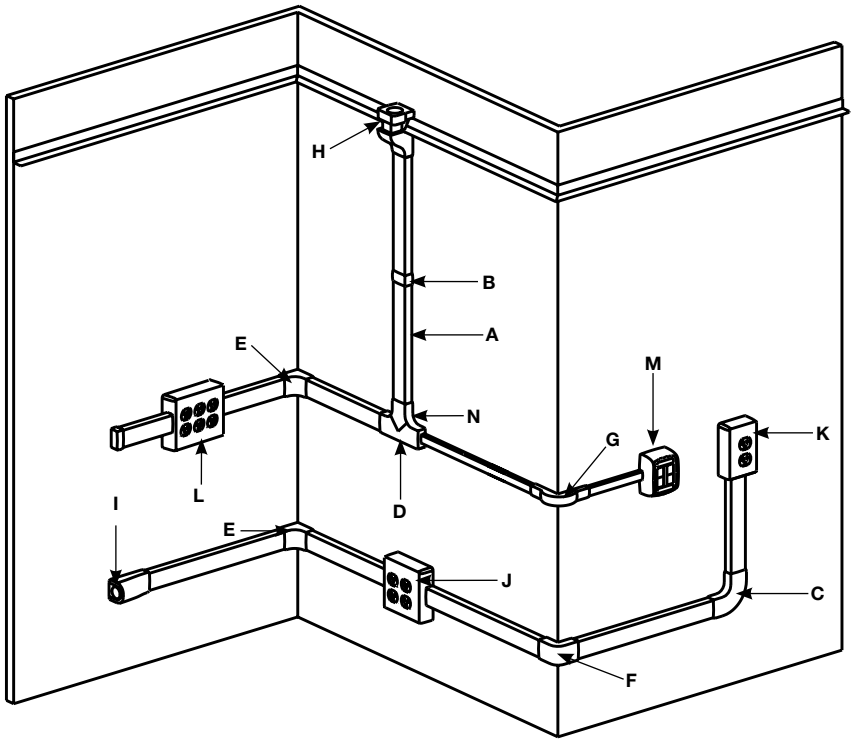

Eclipse Series Raceway Wire Fill Capacities for Communications

	CABLE/WIRE SIZE	O.D. Inches	O.D. (mm)	PN03L 20%*	PN03L 40%**	PN05L 20%*	PN05L 40%**	PN10L 20%*	PN10L 40%**
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG Cat 3	0.190	(4.8)	1	3	3	6	6	13
	4-pair, 24 AWG Cat. 5e	0.210	(5.3)	1	2	2	5	5	11
	4-pair, 24 AWG Cat. 6	0.250	(6.3)	0	1	1	3	4	8
	4-pair, 24 AWG Cat. 6a	0.351	(9.0)	0	0	0	1	2	4
TELEPHONE	2-pair, 24 AWG	0.140	(3.6)	2	5	5	11	12	25
	3-pair, 24 AWG	0.150	(3.8)	2	4	4	9	11	22
	4-pair, 24 AWG	0.190	(4.8)	1	3	3	6	6	13
	25-pair, 24 AWG	0.410	(10.4)	0	0	0	1	1	3
COAXIAL	RG58/U	0.195	(5.0)	1	2	2	5	6	13
	RG59/U	0.242	(6.1)	0	1	1	3	4	8
	RG62/U	0.242	(6.1)	0	1	1	3	4	8
	RG6/U	0.270	(6.9)	0	1	1	3	3	6
TWINAXIAL	100 Ohm	0.330	(8.4)	0	1	1	2	2	4
SHIELDED TWISTED PAIR	TYPE 1	0.390	(9.9)	0	0	0	1	1	3
	TYPE 2	0.465	(11.8)	0	0	0	1	1	2
	TYPE 3	0.245	(6.2)	0	1	1	3	4	8
FIBER	Mini Zip Cord	0.079 x 0.157	(2 x 4)	3	7	7	14	15	31
	Zip Cord	0.118 x 0.236	(3 x 6)	1	3	3	6	7	14
	Round 4 Strand Fiber	0.187	(4.8)	1	3	3	6	7	14
	Round 6 Strand Fiber	0.256	(6.5)	0	1	1	3	3	7


*** 20% cable fill is calculated to approximate reduction in cable capacity due to connectors mounted within raceway and fittings that may restrict cross sectional area.**
**** 40% cable fill is the maximum designed cable fill based on a proposed revision to TIA/EIA 569-A.**

Eclipse Series Raceway Wire Fill Capacities for Power

WIRE SIZE THHN/THWN	O.D. Inches	O.D. (mm)	NUMBER OF CONDUCTORS PN03	PN05	PN10
14 AWG	0.111	(2.8)	8	16	22
12 AWG	0.130	(3.3)	7	14	20
10 AWG	0.164	(4.2)	0	0	19

Eclipse Series PN03, PN05, and PN10 Raceway Profiles

Catalog No./Item	Description/Specifications
PN03L08* **PN03L10**** **PN05L08*** **PN05L10**** **PN10L08*** **PN10L10****	**One-Piece Raceway** – Co-extruded hinged, one-piece raceway.




Cat No.	A	B
PN03L08	1/2" (12.7mm)	13/16" (20.6mm)
PN03L10	1/2" (12.7mm)	13/16" (20.6mm)
PN05L08	5/8" (15.9mm)	1 1/8" (29mm)
PN05L10	5/8" (15.9mm)	1 1/8" (29mm)
PN10L08	13/16" (20.6mm)	1 11/16" (43mm)
PN10L10	13/16" (20.6mm)	1 11/16" (43mm)

*** Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.**
**** 10' (3.05m) lengths available in Fog White finish only.**

Download this product's PEP ecopasport® environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.


Eclipse Series PN03, PN05, and PN10 Surface Nonmetallic Raceway Fittings

Catalog No./Item	Description/Specifications
PN03F06 **PN05F06** **PN10F06**	**Cover Clip** – Covers seam where two lengths of PN03, PN05, or PN10 Series Raceway meet.




Cat No.	A
PN03F06	1" (25mm)
PN05F06	1" (25mm)
PN10F06	1" (25mm)

Catalog No./Item	Description/Specifications
PN03F11 **PN05F11** **PN10F11**	**90° Flat Elbow** – Makes right angle turns on same surface. 1" (25mm) bend radius.



Cat No.	A
PN03F11	2 11/16" (68mm)
PN05F11	2 15/16" (75mm)
PN10F11	3 11/16" (94mm)


Catalog No./Item	Description/Specifications
PN03F15 **PN05F15** **PN10F15**	**Tee** – Branches raceway at right angles on the same surface. 1" (25mm) bend radius.



Cat No.	A	B
PN03F15	2 11/16" (68mm)	4 5/16" (110mm)
PN05F15	2 15/16" (75mm)	4 3/4" (121mm)
PN10F15	3 11/16" (94mm)	5 5/16" (135mm)


NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

Catalog No./Item	Description/Specifications
PN03F17 **PN05F17** **PN10F17**	**Internal Elbow** – Makes right angle turns around internal corners. 1" (25mm) bend radius.




Cat No.	A
PN03F17	2 1/8" (54mm)
PN05F17	2 1/8" (54mm)
PN10F17	2 1/8" (54mm)

Catalog No./Item	Description/Specifications
PN03F18 **PN05F18** **PN10F18**	**External Elbow** – Makes right angle turns around external corners.



Cat No.	A
PN03F18	1 5/8" (41mm)
PN05F18	1 5/8" (41mm)
PN10F18	1 5/8" (41mm)


Catalog No./Item	Description/Specifications
PN03F19 **PN05F19** **PN10F19**	**90° External Elbow** – Makes right angle turns around external corners. 1" (25mm) bend radius.



Cat No.	A	B
PN03F19	15/16" (23.8mm)	3 1/8" (79mm)
PN05F19	1 3/16" (30mm)	3 1/8" (79mm)
PN10F19	1 3/16" (30mm)	3 3/8" (116mm)


Eclipse Series PN03, PN05, and PN10 Surface Nonmetallic Raceway Fittings

Catalog No./Item	Description/Specifications
PN03F20 **PN05F20** **PN10F20**	**Blank End Fitting** – Closes off open end of raceway.




Cat No.	A
PN03F20	11/16" (17.5mm)
PN05F20	11/16" (17.5mm)
PN10F20	11/16" (17.5mm)

Catalog No./Item	Description/Specifications
PN153R	**Reducer Adapter** – Connects PN03 or PN05 Series Raceway to PN10 Series Raceway. Use with a PN10F15 Tee Fitting.




Catalog No./Item	Description/Specifications
PN05F86 **PN10F86**	**Drop Ceiling Connector** – Connects cables from ceiling into PN03, PN05 or PN10 Series Raceway. Includes PN153R Reducer Adapter for use with PN03 Series Raceway.



Cat No.	A	B
PN05F86	1 15/16" (49mm)	4 3/8" (111mm)
PN10F86	2 1/2" (64mm)	4 3/8" (111mm)


Catalog No./Item	Description/Specifications
PN10F21	**Entrance End fitting** – Connects 1/2" and 3/4" trade size conduit or armored cable with PN03, PN05 and PN10 Series Raceway. Includes PN153R Reducer Adapter for use with PN03 and PN05 Series Raceway.




NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

Eclipse Series PN03, PN05, and PN10 Series Device Boxes


Catalog No./Item	Description/Specifications
PSB1	**One-Gang Power Box** – Accepts all standard single-gang NEMA face-plates. Concentric twist-outs on all four sides for PN03, PN05, and PN10 Series Raceway.



Catalog No./Item	Description/Specifications
PSB2	**Two-Gang Device Box** – Accepts all standard two-gang NEMA faceplates. Concentric twist-outs on all four sides for PN03, PN05, and PN10 Series Raceway.











Catalog No./Item	Description/Specifications
PSB3	**Three-Gang Device Box** – Accepts all standard three-gang NEMA faceplates. Concentric twist-outs on all four sides for PN03, PN05, and PN10 Series Raceway. Designed for use with Ortronics® Wi-Jack™ Wireless Access Point.



NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

Eclipse Series PN03, PN05, and PN10 Communication Boxes

Catalog No./Item	Description/Specifications
PBB2S2 	**Bezel Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded outward facing devices including Ortronics® Series II devices
PBB4TJ 	**Bezel Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts four front-loaded outward facing devices including Ortronics® TracJack devices.
PDB1S2 	**Small Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts one front-loaded downward facing device including Ortronics® Series II devices.
PDB1CM 	**Small Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts one front-loaded downward facing device including Pass & Seymour® Activate Series inserts and Wiremold Open System communication modules.

Catalog No./Item	Description/Specifications
PDB2CM 	**Large Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded downward facing devices including Pass & Seymour® Activate Series inserts and Wiremold Open System communication modules.
PDB2S2 	**Large Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded downward facing devices including Ortronics® Series II devices.
PDB2TJ 	**Small Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts two front-loaded downward facing devices including Ortronics® TracJack devices.
PDB4TJ 	**Large Data Box** – Surface mount box for use with Eclipse Series Raceway or standalone application. Accepts four front-loaded downward facing devices including Ortronics® TracJack devices.

NOTE: Add -"WH" suffix for White finish, -"FW" for Fog White finish, or -"V" for Ivory finish.

NOTES

NOTES

NOTES

NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

NOTE: The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act complaint. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

Electrical Wiring Systems

60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295-3472)
www.legrand.us

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone:905.738.9195
www.legrand.ca

ED1099R12 – Updated October 2016 – For latest specs visit www.legrand.us/wiremold

© Copyright 2016 Legrand All Rights Reserved