

GROUNDING

Ground Clamps

Heavy Duty Direct Burial with Adapters & Rebar
G-S-DBR, G-BS, RC Series



SPECIFICATIONS

Heavy Duty Bronze Ground Clamp (G-S DBR)

- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.

HD Ground Clamp With Adapter & Brass Screws (G-BS)

- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.

Ground Clamp With Adapter & Brass Screws (RC)

- cULus Listed 467 Grounding & Bonding/Direct Bury.
- UL467 Listed, Grounding & Bonding.
- *UL Listed for #4 STR - #2 STR.
- **Application:** For use with copper wire only. Harsh direct bury environments & Pool and Spa. Any commercial, industrial, maintenance application where ground wire needs to be connected to rebar.

FEATURES

Heavy Duty Bronze Ground Clamp (G-S DBR)


- Bronze ground clamp for bonding bare copper wire to copper water pipe.
- Assembled with tough 304 stainless steel screws.
- Available with silicon bronze screws by adding suffix -SB.

HD Ground Clamp With Adapter & Brass Screws (G-BS)

- Bronze clamps for copper water pipes with bronze adapters.
- Assembled with brass screws.

Ground Clamp With Adapter & Brass Screws (RC)

- Lay-in style clamp allows for continuous loop wiring.
- Cast silicon bronze connector & Stainless steel hardware.

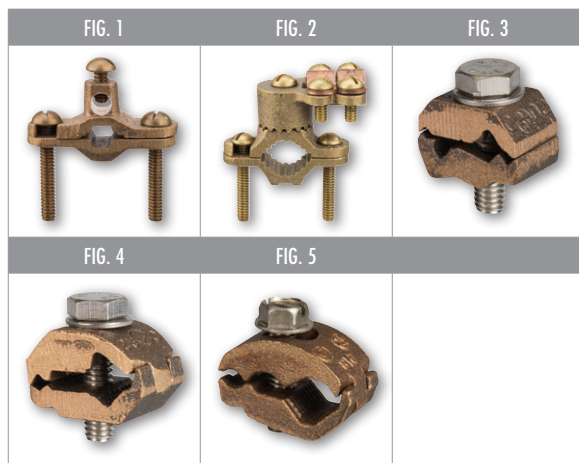

| CAT. NO. | FIG. NO. | CERTIFICATION | GROUND WIRE RANGE (IN.) | PIPE SIZE (IPS) (IN.) | REBAR SIZE (IN.) | GROUND ROD SIZE | LENGTH (L) | WIDTH (W) | HEIGHT (H) | STD. CTN. QTY. |
|----------|----------|---------------|-------------------------|-----------------------|------------------|-----------------|------------|-----------|------------|----------------|
| G-1-SDBR | 1 | cULus | 10 SOL - 2 STR | 1/2-1 | 3/8 - 1 | 3/8-1 | 2.280 | 0.650 | 1.400 | 20 |
| G-2BS | 2 | UL | 8-4/0 STR | 1/2-1 | - | - | 2.320 | 0.748 | 1.437 | 20 |
| G-3BS | 2 | cULus | 8-4/0 STR | 1/2-1 | - | - | 2.320 | 0.748 | 1.437 | 20 |
| RC38 | 3 | cULus | 8-6 SOL | - | 3/8 | - | 1.14 | 0.74 | 0.75 | 25 |
| RC50 | 4 | cULus | 8 SOL - 4 STR | - | 1/2 | - | 1.35 | 0.83 | 0.91 | 25 |
| RC58* | 5 | UL | 6 SOL - 2/0 STR | - | 5/8 | - | 1.62 | 0.80 | 1.06 | 25 |



Scan QR code
for mobile access to
Grounding drawings.

GROUNDING

Ground Clamps

Heavy Duty Direct Burial with Adapters & Rebar
G-S-DBR, G-BS, RC Series



SPECIFICATIONS

Heavy Duty Bronze Ground Clamp (G-S DBR)

- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.

HD Ground Clamp With Adapter & Brass Screws (G-BS)

- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.

Ground Clamp With Adapter & Brass Screws (RC)

- cULus Listed 467 Grounding & Bonding/Direct Bury.
- UL467 Listed, Grounding & Bonding.
- *UL Listed for #4 STR - #2 STR.
- **Application:** For use with copper wire only. Harsh direct bury environments & Pool and Spa. Any commercial, industrial, maintenance application where ground wire needs to be connected to rebar.

FEATURES

Heavy Duty Bronze Ground Clamp (G-S DBR)


- Bronze ground clamp for bonding bare copper wire to copper water pipe.
- Assembled with tough 304 stainless steel screws.
- Available with silicon bronze screws by adding suffix -SB.

HD Ground Clamp With Adapter & Brass Screws (G-BS)

- Bronze clamps for copper water pipes with bronze adapters.
- Assembled with brass screws.

Ground Clamp With Adapter & Brass Screws (RC)

- Lay-in style clamp allows for continuous loop wiring.
- Cast silicon bronze connector & Stainless steel hardware.

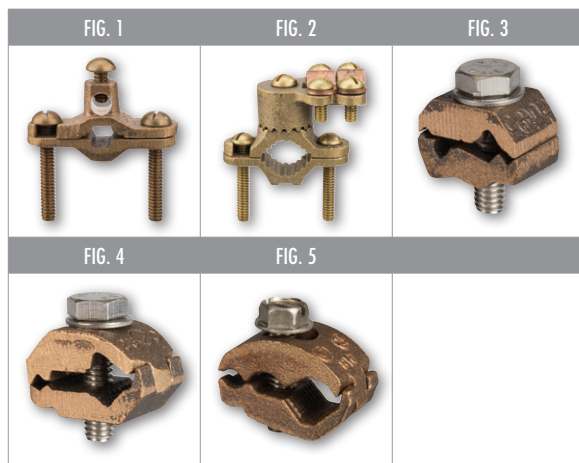

| CAT. NO. | FIG. NO. | CERTIFICATION | GROUND WIRE RANGE (IN.) | PIPE SIZE (IPS) (IN.) | REBAR SIZE (IN.) | GROUND ROD SIZE | LENGTH (L) | WIDTH (W) | HEIGHT (H) | STD. CTN. QTY. |
|----------|----------|---------------|-------------------------|-----------------------|------------------|-----------------|------------|-----------|------------|----------------|
| G-1-SDBR | 1 | cULus | 10 SOL - 2 STR | 1/2-1 | 3/8 - 1 | 3/8-1 | 2.280 | 0.650 | 1.400 | 20 |
| G-2BS | 2 | UL | 8-4/0 STR | 1/2-1 | - | - | 2.320 | 0.748 | 1.437 | 20 |
| G-3BS | 2 | cULus | 8-4/0 STR | 1/2-1 | - | - | 2.320 | 0.748 | 1.437 | 20 |
| RC38 | 3 | cULus | 8-6 SOL | - | 3/8 | - | 1.14 | 0.74 | 0.75 | 25 |
| RC50 | 4 | cULus | 8 SOL - 4 STR | - | 1/2 | - | 1.35 | 0.83 | 0.91 | 25 |
| RC58* | 5 | UL | 6 SOL - 2/0 STR | - | 5/8 | - | 1.62 | 0.80 | 1.06 | 25 |



Scan QR code
for mobile access to
Grounding drawings.