ELLIOTT ELECTRIC SUPPLY
We Deliver...Lower Cost, Quality Products, & Personal Service
2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685



RFG2 FIRESTOP GROMMET FOR CABLE(S) UP TO 0.53", 10/BAG

SPECIFIED TECHNOLOGIES IN

Catalog Number	RFG2
Manufacturer	SPECIFIED TECHNOLOGIES IN
Description	EZ-Firestop Grommet--Two-piece split cable grommet for single or small multiple cables up to 0.53 in. (14 mm) O.D.
Weight per unit	0.2100 (lbs/each)
Product Category	Firestopping Devices & Materia

Features

Material	Premium plenum-plastics and incorporating a soft foam fire and smoke sealing inner foam core.
Opening Type	Small cable penetrations through framed wall assemblies
Shape	Cylinder
Included	Two-piece split cable grommet for small cable penetrations up to 0.53 in. (14 mm)O.D. (Blister Pack of 10 Grommets)
Installation Type	Snaps on, no special installation required
Media	Yes

Material, Color, and Finish

Color	Red

Descriptions

Construction	Grommets make sealing penetrations of individual and small bundles of cables through gypsum board walls a snap. Molded from premium plenum-plastics and incorporating a soft foam inner core, EZ-Firestop Grommets eliminate the need for sleeves, firestop putties & sealants.
Description	FIRESTOP GROMMET FOR CABLE(S) UP TO 0.53", 10/BAG
Long Description	EZ-Firestop Grommet--Two-piece split cable grommet for single or small multiple cables up to 0.53 in. (14 mm) O.D.
Product Type	Firestop Grommet For Cables Up to 0.53"
Short Description	Grommet for Cables up to 0.53"
Special Features	Professional finished appearance., Designed for 1 & 2 Hr. Fire-Rated Gypsum Board Wall assemblies., Ideal for Alarm, Security or Wireless Access Point installations., Available as a single cable or multiple cable solution., Suited for addressing single membrane or complete through-penetrations.
Extra Long Description	STI RFG2 Firestop Grommet for Cable

ELLIOTT ELECTRIC SUPPLY
We Deliver...Lower Cost, Quality Products, & Personal Service
2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685

Manufacturer Information

Brand	Ez-Firestop
	STI - Specified Technologies Inc
GTIN	00730573250594
Manufacturers Part Number	RFG2
UPC	889111

Taxonomies, Classifications, and Categories

Category Description	Fire Resistant/Protection Materials
Type	EZPath Firestop Grommet

Packaging

Carton	10
Weight Per Each	0.2100 (lbs/each)

Uses, Certifications, and Standards

Application	Designed to permanently seal small cable penetrations through dry wall.
Mounting	Walls
Temperature Rating	Less than 130
Standard	ASTM E814, UL 1479, CAN/ULC S115

EZ-Firestop® Grommet

EZ-Firestop® Grommets are a molded, two-piece grommet with an integral fire and smoke sealing foam membrane for sealing small cable penetrations through framed wall assemblies. Grommet snaps together around cable(s) and locks tightly into the wall.

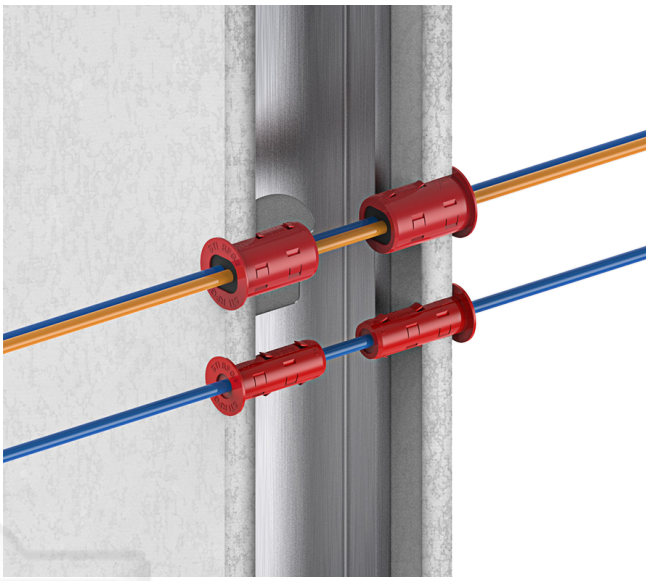

Applications

EZ-Firestop® Grommets are designed to permanently seal small cable penetrations through drywall.

Specifications

For small cables penetrating gypsum board/stud wall assemblies, the firestop shall consist of a molded, two-piece grommet having a foam fire and smoke sealing membrane that conforms to the outside diameter of the individual cable. The grommet product shall be capable of locking into place to secure the cable penetration within the wall assembly. The grommet shall be UL Certified and tested to the requirements of ASTM E814 (UL1479) and CAN/ULC-S115.

Specified Divisions

Division 7	07 84 13	Penetration Firestopping
Division 26	26 00 00	Electrical
Division 27	27 00 00	Communications

Performance

EZ-Firestop® Grommets were tested to meet the exacting criteria of ASTM E814 (UL1479) and CAN/ULC-S115. Tested systems provide up to 2 hour fire ratings for small cable penetrations in gypsum board/stud wall assemblies.

Features & Benefits

- One or more cables with total O.D. up to 0.27" (7 mm) for RFG1
- One or more cables with total O.D. up to 0.53" (14 mm) for RFG2
- Easy firestop & smoke seal for a small cable penetrations through fire-rated walls
- For use in gypsum board wall (i.e. drywall) construction
- Tested to ASTM E814 (UL1479) and CAN/ULC-S115
- Rated for use in plenums

Limitations

This product has been designed to be safe with plastics. It has been used extensively and successfully with various types of plastic pipes, tubes, and plastic cable insulations. Variations in these materials, however, make it impossible to guarantee compatibility. STI strongly recommends that the user consults with the pipe, tubing, or cable manufacturer in question regarding any known sensitivities or potential restrictions before applying this product.

PHYSICAL PROPERTIES

Color	Red
Plenum Grade	Yes
Leakage Rating	Less than 1 CFM (ANSI/UL1479)
In Service Temperature	Less than 130°F (54°C)
VOC content	N/A
Shelf Life	No Limit
Overall Length	1-5/8" (41.3 mm)
Installed Depth (from wall surface)	1-9/16" (39.7 mm)
Required Opening for RFG1	9/16" (14 mm)
Weight for RFG1	0.01 lbs (5 g)
Required Opening for RFG2	1" (25 mm)
Weight for RFG2	0.03 lbs (14 g)

EZ-Firestop® Grommet

Maintenance

No maintenance of the grommet is normally required.

System Selection

To find your firestop system or create a submittal, visit https://systems.stifirestop.com/ to use System Search & Submittal Builder. You may also visit the UL Online Certifications Directory/UL Product iQ™ for complete listings. (Firestop Systems).

Technical Service

Specified Technologies Inc. provides toll free technical support to assist in product selection and appropriate installation design. UL System designs suitable for submittal or specification purposes are available on request. A complete library of technical information is provided at the company's website www.stifirestop.com including Safety Data Sheets (SDS's).

Precautionary Information

No unusual hazards are known or expected. Observe normal safety procedures during installation.

Availability

EZ-Firestop® Grommets are available from Specified Technologies Inc. (STI) authorized distributors. For additional purchasing and technical information or for the names and locations of the nearest representative and/or distributor, regarding this and other Specified Technology products, please call 1-800-992-1180 or visit www.stifirestop.com.

Patents

US2011088342A1; US8397452B2; USD657232S

ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
RFG1	730573250587	Two-piece split cable grommet for single cable penetrations up to 0.27" (7 mm) diameter	1 Pack 10 Grommets per pack	10 Packs	0.21 lbs (0.10 kg)
RFG2	730573250594	Two-piece split cable grommet for single or multiple cable penetrations up to 0.53" (14 mm) diameter	1 Pack 10 Grommets per pack	10 Packs	0.40 lbs (0.18 kg)

IMPORTANT NOTICE: ALL STATEMENTS, TECHNICAL INFORMATION, AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED UPON TESTING BELIEVED TO BE RELIABLE, BUT THE ACCURACY AND COMPLETENESS THEREOF IS NOT GUARANTEED.

STI TYPICALLY WARRANTIES ITS PRODUCTS FOR ONE FULL YEAR. FOR COMPLETE DETAILS OF OUR STANDARD WARRANTY, PLEASE VISIT WWW.STIFIRESTOP.COM/LEGAL/WARRANTY

MADE IN THE USA – © 2021 SPECIFIED TECHNOLOGIES INC.

IFC MEMBER