


TR decorator receptacles

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Description

2-pole, 3-wire grounding
 15A, 125V/AC
 20A, 125V/AC



Design features

- Provides compliance with 2017 NEC Article 406.12
- Durable impact-resistant thermoplastic face and back body is virtually unbreakable
- Terminal screws are backed out and ready to wire
- Extra-long and extra-wide mounting straps
- Side-wire terminals accept up to #10 solid or stranded wire

Table 1. TR Decorator receptacles

| Catalog no. | Description | Rating | | NEMA | Color suffix |
|-----------------------------------|-----------------------------------|--------|------|-------|------------------------|
| | | A | V/AC | | |
| <input type="checkbox"/> TR6250__ | Decorator single receptacle | 15 | 125 | 5-15R | B, BK, V, W |
| <input type="checkbox"/> TR6252__ | Duplex receptacle, auto grounding | 15 | 125 | 5-15R | LA, V, W |
| <input type="checkbox"/> TR6350__ | Decorator single receptacle | 20 | 125 | 5-15R | LA, V, W |
| <input type="checkbox"/> TR6352__ | Decorator duplex receptacle | 20 | 125 | 5-15R | A, B, BK, GY, LA, V, W |

Compliances, specifications and availability are subject to change without notice.



TR6250



TR6252



TR6352



Powering Business Worldwide

Effective September 2017

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Applications

Tamper resistant receptacles contain a UL listed safety shutter system that prevents the insertion of foreign objects into receptacles. The safety shutters will open only upon insertion of a 2-prong or 3-prong plug. Installing these receptacles ensures compliance with 2017 NEC Article 406.12. Areas of application include: new residential construction; remodel/retrofit residential construction; apartment buildings; condominiums and townhouses; hotels, motels, inns and suites with kitchenettes; retirement communities, nursing homes and assisted living facilities. (Note: 2017 NEC Article 406.12 applies to new construction only).

Table 2. Specifications

| | |
|--------------------------------------|--|
| Catalog no. | TR6250, TR6252, TR6350, TR6352 Series |
| Receptacle type | Residential grade duplex |
| Wiring type | Back & side wire 9509TR, 9510TR (except 9507 push & side wire) |
| Testing & code compliance | <ul style="list-style-type: none"> • cULus Listed to UL498, file no. E15058 • UL certified to CSA C22.2, no. 42 • NOM/ANSI certified. |
| Environmental specifications | Flammability: Meets UL 94 requirements; TR1107, TR270, 9505TR V0 rated; 9507TR, 9508TR, 9510TR V2 rated Temperature rating: -TR1107, TR270, 9505TR -20°C to 60°C (-4°F to 140°F); 9507TR, 9508TR, 9510TR - 20°C to 70°C (-4°F to 158°F) |
| Electrical specifications | Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC) |
| Mechanical specifications | Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device |

Table 3. Materials

| | |
|------------------------------|---|
| Catalog no. | TR6250, TR6252, TR6350, TR6352 Series |
| Receptacle type | Residential grade duplex |
| Body top & bottom | TR1107, TR270, 9505TR - PVC 9507TR, 9508TR - nylon 9510TR - PVC top, nylon bottom |
| Strap | Galvanized steel TR1107, TR270, 9505TR Nickel-plated steel 9507TR, 9508TR, 9510TR |
| Contacts | Brass alloy |
| Terminal screws | Brass/nickel-plated steel |
| Terminal clamps | Brass-plated 9507TR, 9508TR; steel 9510TR |

Table 5. Color ordering information

For ordering devices, include Cat. no. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

| | | | | | | |
|----------|----------|-----------|-----------|----------------|----------|----------|
| A | B | BK | GY | LA | V | W |
| (Almond) | (Brown) | (Black) | (Gray) | (Light Almond) | (Ivory) | (White) |

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Product dimensions

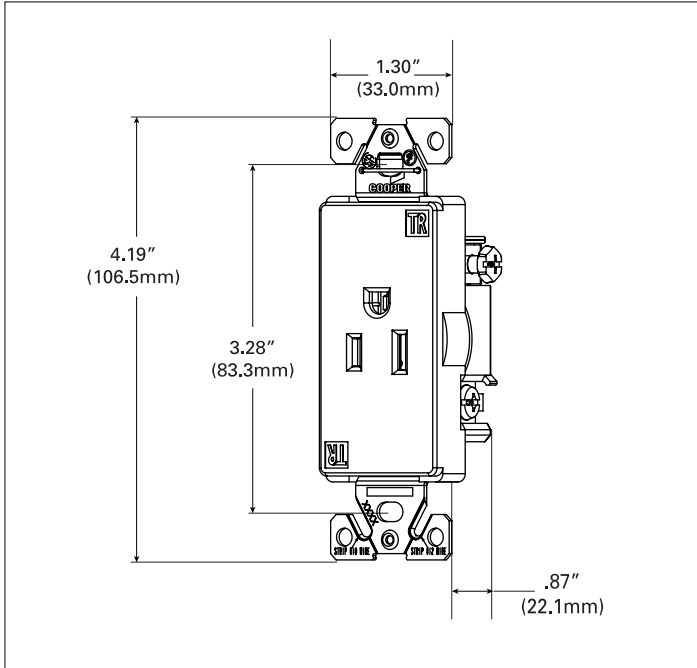


Figure 1. TR6250 Line art with dimensions

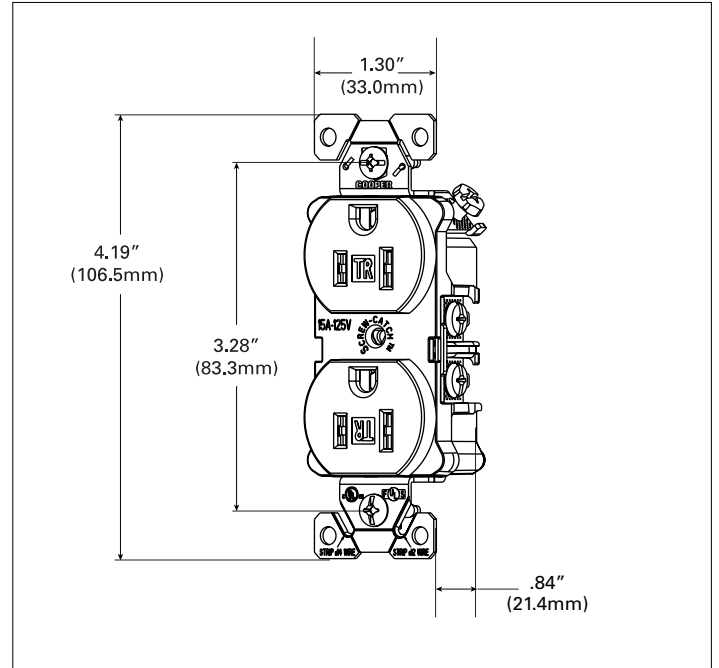


Figure 2. TR6252 Line art with dimensions

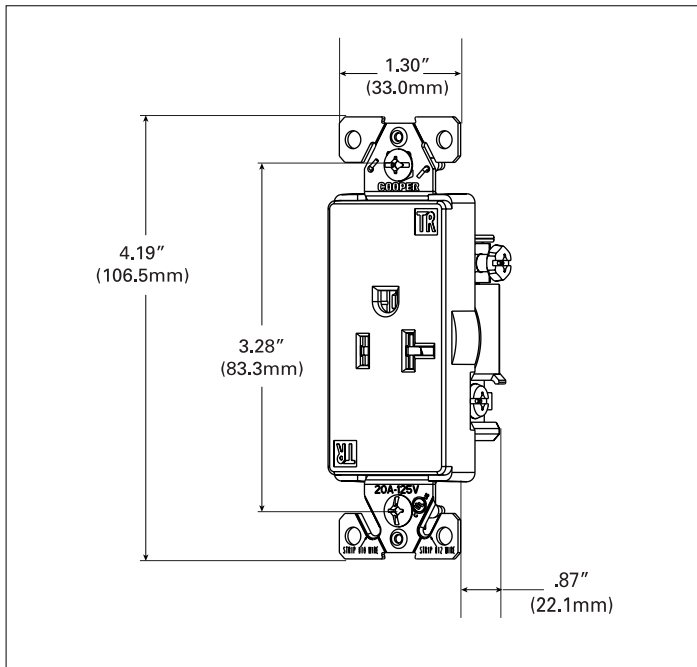


Figure 3. TR6350 Line art with dimensions

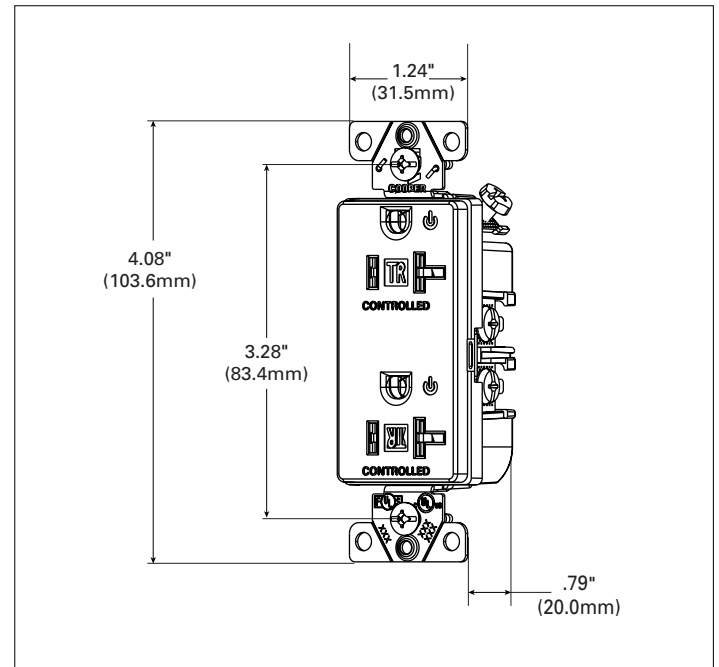






Figure 4. TR6352 Line art with dimensions

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Certifications & compliances

| Catalog no. |  |  |
|-------------|---|---|
| TR6250 | • | • |
| TR6252 | • | • |
| TR6350 | • | • |
| TR6352 | • | • |

KEY:  cULus  NOM

Compliances, specifications and availability are subject to change without notice.

Electrical Sector
203 Cooper Circle
Peachtree City, GA 30269
United States
Eaton.com
Eaton.com/wiringdevices

Electrical Sector
Canada Operations
5925 McLaughlin Road
Mississauga, Ontario, L5R 1B8
Canada
EatonCanada.ca
Eaton.com/wiringdevices


Electrical Sector
Mexico Operations
Carr. Tlalnepantla -
Cuautitlan Km 17.8 s/n
Col. Villa Jardin esq.
Cerrada 8 de Mayo
Cuautitlan, Mexico CP 54800
Mexico
Eaton.mx
Eaton.com/wiringdevices

TR decorator receptacles

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Description

2-pole, 3-wire grounding
 15A, 125V/AC
 20A, 125V/AC



Design features

- Provides compliance with 2017 NEC Article 406.12
- Durable impact-resistant thermoplastic face and back body is virtually unbreakable
- Terminal screws are backed out and ready to wire
- Extra-long and extra-wide mounting straps
- Side-wire terminals accept up to #10 solid or stranded wire



TR6250



TR6252



TR6352

Table 1. TR Decorator receptacles

| Catalog no. | Description | Rating | | NEMA | Color suffix |
|-----------------------------------|-----------------------------------|--------|------|-------|------------------------|
| | | A | V/AC | | |
| <input type="checkbox"/> TR6250__ | Decorator single receptacle | 15 | 125 | 5-15R | B, BK, V, W |
| <input type="checkbox"/> TR6252__ | Duplex receptacle, auto grounding | 15 | 125 | 5-15R | LA, V, W |
| <input type="checkbox"/> TR6350__ | Decorator single receptacle | 20 | 125 | 5-15R | LA, V, W |
| <input type="checkbox"/> TR6352__ | Decorator duplex receptacle | 20 | 125 | 5-15R | A, B, BK, GY, LA, V, W |

Compliances, specifications and availability are subject to change without notice.



Powering Business Worldwide

Effective September 2017

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Applications

Tamper resistant receptacles contain a UL listed safety shutter system that prevents the insertion of foreign objects into receptacles. The safety shutters will open only upon insertion of a 2-prong or 3-prong plug. Installing these receptacles ensures compliance with 2017 NEC Article 406.12. Areas of application include: new residential construction; remodel/retrofit residential construction; apartment buildings; condominiums and townhouses; hotels, motels, inns and suites with kitchenettes; retirement communities, nursing homes and assisted living facilities. (Note: 2017 NEC Article 406.12 applies to new construction only).

Table 2. Specifications

| | |
|--------------------------------------|--|
| Catalog no. | TR6250, TR6252, TR6350, TR6352 Series |
| Receptacle type | Residential grade duplex |
| Wiring type | Back & side wire 9509TR, 9510TR (except 9507 push & side wire) |
| Testing & code compliance | <ul style="list-style-type: none"> • cULus Listed to UL498, file no. E15058 • UL certified to CSA C22.2, no. 42 • NOM/ANSI certified. |
| Environmental specifications | Flammability: Meets UL 94 requirements; TR1107, TR270, 9505TR V0 rated; 9507TR, 9508TR, 9510TR V2 rated Temperature rating: -TR1107, TR270, 9505TR -20°C to 60°C (-4°F to 140°F); 9507TR, 9508TR, 9510TR - 20°C to 70°C (-4°F to 158°F) |
| Electrical specifications | Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC) |
| Mechanical specifications | Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device |

Table 3. Materials

| | |
|------------------------------|---|
| Catalog no. | TR6250, TR6252, TR6350, TR6352 Series |
| Receptacle type | Residential grade duplex |
| Body top & bottom | TR1107, TR270, 9505TR - PVC 9507TR, 9508TR - nylon 9510TR - PVC top, nylon bottom |
| Strap | Galvanized steel TR1107, TR270, 9505TR Nickel-plated steel 9507TR, 9508TR, 9510TR |
| Contacts | Brass alloy |
| Terminal screws | Brass/nickel-plated steel |
| Terminal clamps | Brass-plated 9507TR, 9508TR; steel 9510TR |

Table 5. Color ordering information

For ordering devices, include Cat. no. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

| | | | | | | |
|----------|----------|-----------|-----------|----------------|----------|----------|
| A | B | BK | GY | LA | V | W |
| (Almond) | (Brown) | (Black) | (Gray) | (Light Almond) | (Ivory) | (White) |

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Product dimensions

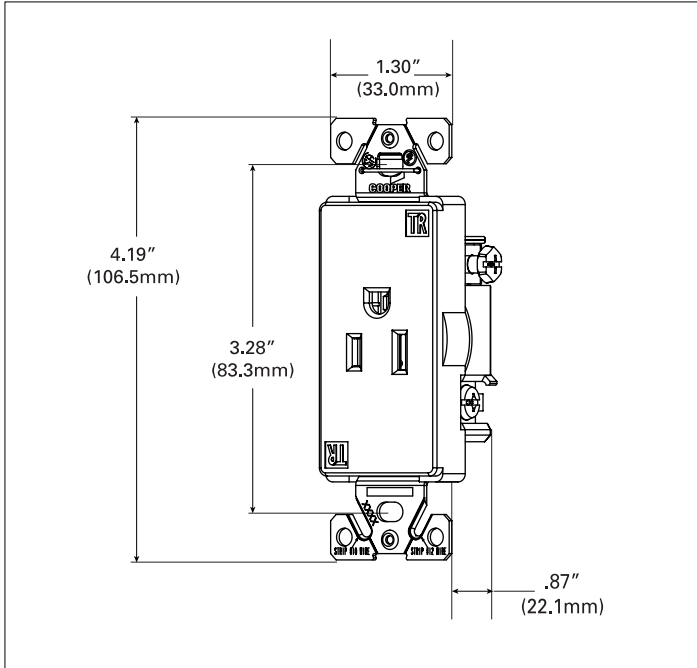


Figure 1. TR6250 Line art with dimensions

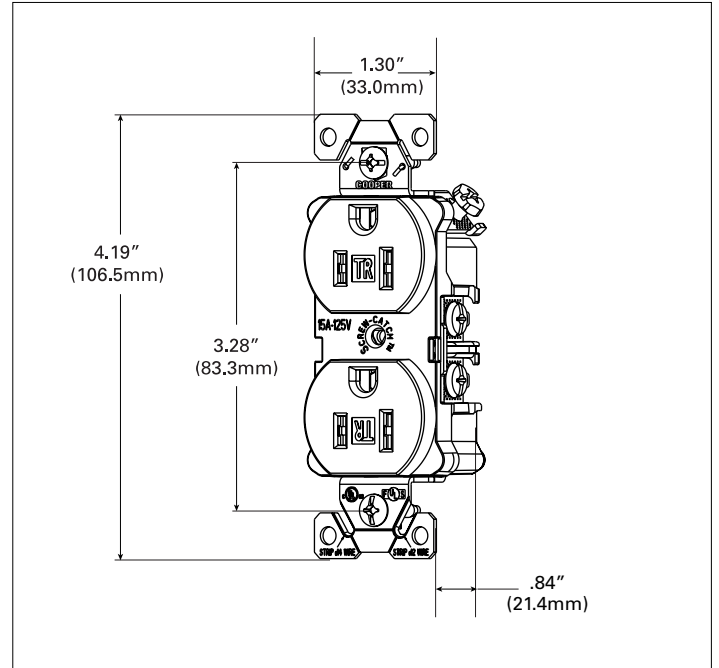


Figure 2. TR6252 Line art with dimensions

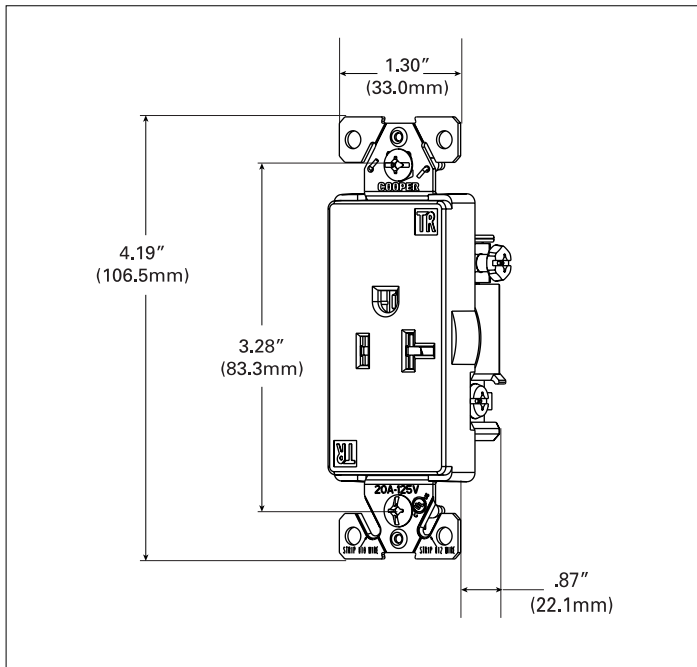


Figure 3. TR6350 Line art with dimensions

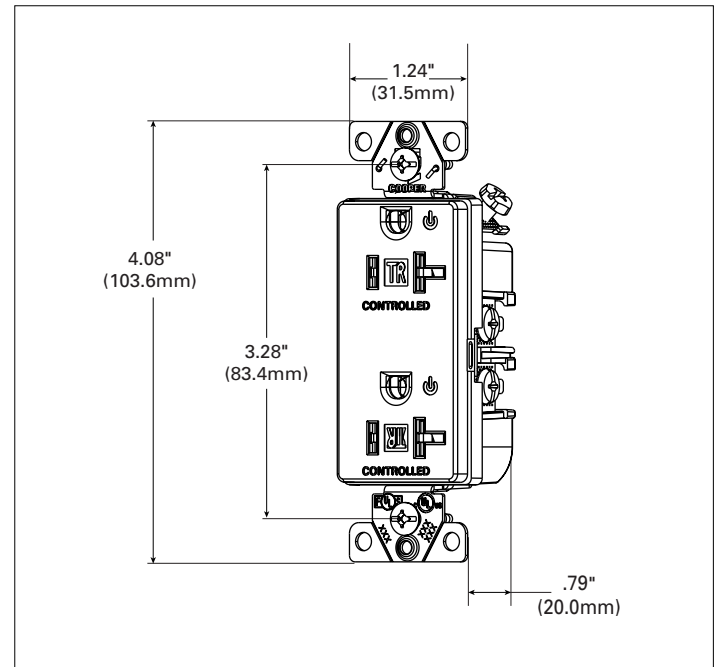






Figure 4. TR6352 Line art with dimensions

| | |
|-----------------|--------------|
| Project Name: | Prepared By: |
| Project Number: | Date: |
| Catalog Number: | Type: |

Certifications & compliances

| Catalog no. |  |  |
|-------------|---|---|
| TR6250 | • | • |
| TR6252 | • | • |
| TR6350 | • | • |
| TR6352 | • | • |

KEY:  cULus  NOM

Compliances, specifications and availability are subject to change without notice.

Electrical Sector
203 Cooper Circle
Peachtree City, GA 30269
United States
Eaton.com
Eaton.com/wiringdevices

Electrical Sector
Canada Operations
5925 McLaughlin Road
Mississauga, Ontario, L5R 1B8
Canada
EatonCanada.ca
Eaton.com/wiringdevices

Electrical Sector
Mexico Operations
Carr. Tlalnepantla -
Cuautitlan Km 17.8 s/n
Col. Villa Jardin esq.
Cerrada 8 de Mayo
Cuautitlan, Mexico CP 54800
Mexico
Eaton.mx
Eaton.com/wiringdevices