



**Plug**



**Connector**



**E**



**C**



**Receptacle**

**200 Amp 600VAC/250VDC; 50-400hertz**  
**NEMA 3 4, 4X<sup>Ⓢ</sup>**

**Wire Range**

Regular Stranding: #1 - 250  
 Extra flex: #1 - 250  
 (.653 max conductor diameter)



File No. E10757  
 E213215



Certified File No. LR111846

**FEATURES-SPECIFICATIONS**

| 200 AMP PLUGS & CONNECTORS |         |               |                |           |
|----------------------------|---------|---------------|----------------|-----------|
| GROUND STYLE               | CIRCUIT | GROMMET RANGE | CATALOG NUMBER |           |
|                            |         |               | PLUG           | CONNECTOR |
| Style I                    | 3W3P    | 1.0 - 2.5 IN  | VP203512       | VPR203112 |
|                            | 4W4P    | 1.0 - 2.5 IN  | VP204513       | VPR204113 |
| Style II                   | 2W3P    | 1.0 - 2.5 IN  | VP203612       | VPR203212 |
|                            | 3W4P    | 1.0 - 2.5 IN  | VP204612       | VPR204212 |

| MODIFICATIONS*         |                                                     |
|------------------------|-----------------------------------------------------|
| CATALOG NUMBER         | DESCRIPTION                                         |
| <b>S39<sup>Ⓢ</sup></b> | Reverse service for receptacles, plugs & connectors |
| <b>S37</b>             | Polarization for receptacles, plugs & connectors    |


\*See page PR5 for more information on these options.

| 200 AMP RECEPTACLES & BACK BOXES       |         |                     |                     |                           |
|----------------------------------------|---------|---------------------|---------------------|---------------------------|
| GROUND STYLE                           | CIRCUIT | CATALOG NUMBER      |                     |                           |
|                                        |         | E <sup>Ⓢ</sup> TYPE | C <sup>Ⓢ</sup> TYPE | RECEPTACLE ONLY           |
| Style I                                | 3W3P    | VR20312E6           | VR20312C7           | VR20312                   |
|                                        | 4W4P    | VR20412E6           | VR20412C7           | VR20412                   |
| Style II                               | 2W3P    | VR20322E6           | VR20322C7           | VR20322                   |
|                                        | 3W4P    | VR20422E6           | VR20422C7           | VR20422                   |
| Splice box only w/adaptor <sup>Ⓢ</sup> |         | VJ68                | VJC78               | Angle adapter only VJA200 |


- ② 200 Amp Back Boxes are available in dead-end sizes 1-1/2", 2" & 2-1/2" conduit sizes. Dead-end box shown is 2". For other available dead-end box sizes, change the BOLD "6" in either the dead-end assembly or box only number as follows: **5**=1-1/2", **6**=2", **7**=2-1/2". Feed through boxes are available in 2-1/2"; use "R" series adapters as required for smaller sizes (sold separately). Assembly catalog numbers are listed for ease of ordering or specification and devices are shipped as components.

- ③ Adapter only can be used to attach receptacle at an angle to a standard sheet metal box.

NOTE: 200A VersaMate receptacle lids secure with wingnuts for N4X environments when not in use. VersaMate plugs secure with wingnuts and/or lock-ring collar. This exclusive dual method allows retention of competitive plugs that use either wingnuts or a lock-ring collar.

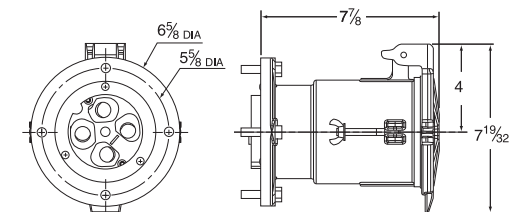


**Receptacle**

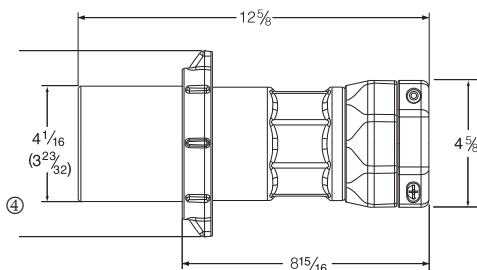


**Plug**

VersaRange<sup>®</sup> clamps provide a firm fit for one plug (or connector) over a wide range of cable diameters (competitors often need two - requiring additional sizing decisions).

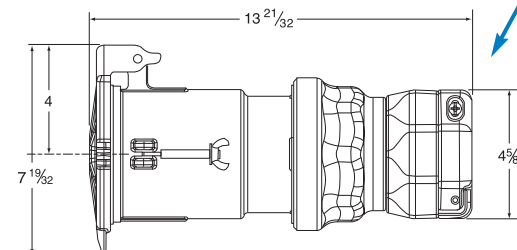


**Connector**

**Back Box Dimensions**

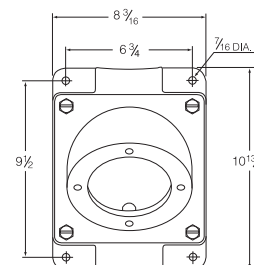

**VJC**

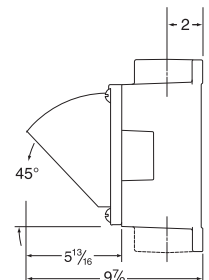

- ① Components are intermateable & UL classified with Appleton<sup>®</sup> Powertite<sup>®</sup> or Crouse-Hinds<sup>®</sup> Arkrite<sup>®</sup> devices (when installed in accordance with instructions furnished with device. Assemblies containing components from other manufacturers would have the NEMA type rating of the lowest rated device.
- ④ Dimensions in ( ) are 3 pole devices; balance are 4 pole.
- ⑤ 200A 3W4P Reverse Service configured "W" Series and VersaMate<sup>®</sup> are not intermateable. However, the VersaMate VR20422-S39 receptacle ships with instructions to permanently convert for use with existing PW-6402X SU39 plugs. Factory only configured plugs to fit old RW64C-SU39 receptacles may be ordered as VP-PW64026 SU39.



**KILLARK<sup>®</sup>**



**Plug**



**Connector**



**E**



**C**



**Receptacle**

**200 Amp 600VAC/250VDC; 50-400hertz**  
**NEMA 3 4, 4X<sup>Ⓢ</sup>**

**Wire Range**

Regular Stranding: #1 - 250  
 Extra flex: #1 - 250  
 (.653 max conductor diameter)



File No. E10757  
 E213215



Certified File No. LR111846

**FEATURES-SPECIFICATIONS**

| 200 AMP PLUGS & CONNECTORS |         |               |                |           |
|----------------------------|---------|---------------|----------------|-----------|
| GROUND STYLE               | CIRCUIT | GROMMET RANGE | CATALOG NUMBER |           |
|                            |         |               | PLUG           | CONNECTOR |
| Style I                    | 3W3P    | 1.0 - 2.5 IN  | VP203512       | VPR203112 |
|                            | 4W4P    | 1.0 - 2.5 IN  | VP204513       | VPR204113 |
| Style II                   | 2W3P    | 1.0 - 2.5 IN  | VP203612       | VPR203212 |
|                            | 3W4P    | 1.0 - 2.5 IN  | VP204612       | VPR204212 |

| MODIFICATIONS*         |                                                     |
|------------------------|-----------------------------------------------------|
| CATALOG NUMBER         | DESCRIPTION                                         |
| <b>S39<sup>Ⓢ</sup></b> | Reverse service for receptacles, plugs & connectors |
| <b>S37</b>             | Polarization for receptacles, plugs & connectors    |


\*See page PR5 for more information on these options.

| 200 AMP RECEPTACLES & BACK BOXES        |         |                     |                     |                           |
|-----------------------------------------|---------|---------------------|---------------------|---------------------------|
| GROUND STYLE                            | CIRCUIT | CATALOG NUMBER      |                     |                           |
|                                         |         | E <sup>Ⓢ</sup> TYPE | C <sup>Ⓢ</sup> TYPE | RECEPTACLE ONLY           |
| Style I                                 | 3W3P    | VR20312E6           | VR20312C7           | VR20312                   |
|                                         | 4W4P    | VR20412E6           | VR20412C7           | VR20412                   |
| Style II                                | 2W3P    | VR20322E6           | VR20322C7           | VR20322                   |
|                                         | 3W4P    | VR20422E6           | VR20422C7           | VR20422                   |
| Splice box only w/adaptor <sup>Ⓢ③</sup> |         | VJ68                | VJC78               | Angle adapter only VJA200 |


- ② 200 Amp Back Boxes are available in dead-end sizes 1-1/2", 2" & 2-1/2" conduit sizes. Dead-end box shown is 2". For other available dead-end box sizes, change the BOLD "6" in either the dead-end assembly or box only number as follows: **5**=1-1/2", **6**=2", **7**=2-1/2". Feed through boxes are available in 2-1/2"; use "R" series adapters as required for smaller sizes (sold separately). Assembly catalog numbers are listed for ease of ordering or specification and devices are shipped as components.

- ③ Adapter only can be used to attach receptacle at an angle to a standard sheet metal box.

NOTE: 200A VersaMate receptacle lids secure with wingnuts for N4X environments when not in use. VersaMate plugs secure with wingnuts and/or lock-ring collar. This exclusive dual method allows retention of competitive plugs that use either wingnuts or a lock-ring collar.

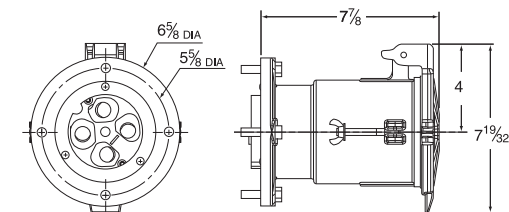


**Receptacle**

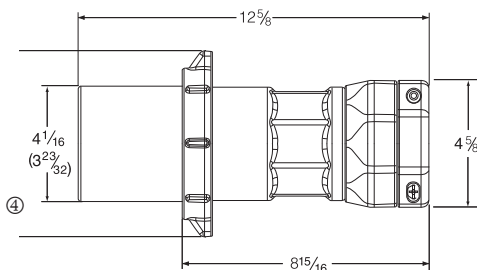


**Plug**

VersaRange<sup>®</sup> clamps provide a firm fit for one plug (or connector) over a wide range of cable diameters (competitors often need two – requiring additional sizing decisions).

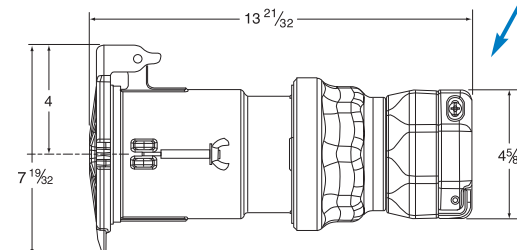


**Connector**

**Back Box Dimensions**

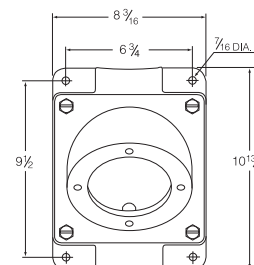

**VJC**

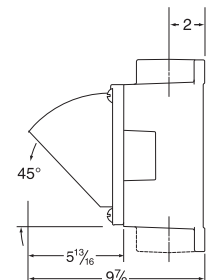

- ① Components are interchangeable & UL classified with Appleton<sup>®</sup> Powertite<sup>®</sup> or Crouse-Hinds<sup>®</sup> Arkrite<sup>®</sup> devices (when installed in accordance with instructions furnished with device. Assemblies containing components from other manufacturers would have the NEMA type rating of the lowest rated device.
- ④ Dimensions in ( ) are 3 pole devices; balance are 4 pole.
- ⑤ 200A 3W4P Reverse Service configured "W" Series and VersaMate<sup>®</sup> are not interchangeable. However, the VersaMate VR20422-S39 receptacle ships with instructions to permanently convert for use with existing PW-6402X SU39 plugs. Factory only configured plugs to fit old RW64C-SU39 receptacles may be ordered as VP-PW64026 SU39.



**KILLARK<sup>®</sup>**