Stonco KEENE

Wall Mount

Wall Pack dual select

60W, 100W, and 150W



Project:

Location:

Cat.No:

Type:

Lamps: Qty:

Notes:

Stonco Keene LED Wall Pack dual select family features energy saving LED technology ideal for wall mounted applications. The Wall pack dual select is available in three sizes to accommodate multiple mounting heights.

Ordering Guide

Example : WP60-SCT-G3-10-BZ

Luminaire	Wattage	Generation	Voltage	Finish
WP		SCT-G3	10	
WP Wall Pack	**60** 30-40-50-60W **100** 70-80-90-100W **150** 120-130-140-150W	**SCT-G3** CCT Selectable 30K/40K/50K, 80CRI, Integrated Daylight Sensor, Generation 3	**10** 120-347V	**BZ** Bronze **WH** White

Specifications

Housing

Die-cast aluminum housing and lens frame with heat and impact resistant borosilicate glass lens.

IP Rating

LED light engine is weather proof sealed in a luminaire rated IP65.

Electrical

Driver efficiency (>84% at full load). Available in 120-347V.

LED Board and Array

1 or 2 Chip on Board (Mid-power) LEDs. Selectable Color temperature 3000K, 4000K, 5000K. Minimum CRI of 80.

Mounting

Mounts to standard 3-½" to 4" round and octagonal or 4 inch square electrical junction boxes. ½ NPT threaded conduit access.

Energy Saving Benefits

System efficacy 155lm/W @ 4000K

Daylight Sensor

Dipswitch on Photocell	Photocell	Luminaire
OFF	Disable	ON
ON (Default)	Ambient light < 5-20lux, Ambient light > 25-50lux	ON OFF

Listings

UL/cUL listed to the UL 1598 standard, suitable for Wet Locations. Suitable for use in ambient from -40° to 40°C (-40° to 104°F).

Product is DesignLights Consortium® qualified.

Finish

Each luminaire receives a powdercoat finish. Can chose between Bronze (BZ) and White (WH) finish.

Limited Warranty


Luminaires are all covered by a 5-year limited warranty. See https://www.genlyte.com/en-us/support/warranties for details.

WP Wall Pack dual select LED

60W, 100W and 150W

Dimensions

unit: mm/inch

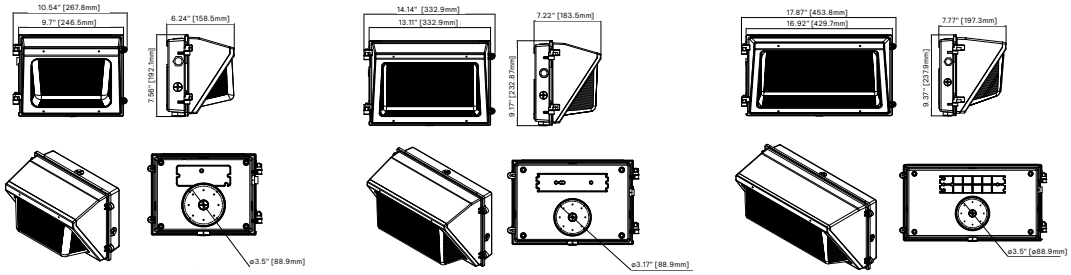

60W 100W 150W

Weight

Product	Weight
WP60W	4.629lbs (2.1kg)
WP100W	7.27lbs (3.3kg)
WP150W	13.4lbs (6.1kg)

LED Wattage and Lumen Values

12NC	Order Codes	Description	Total LEDs	Average System Wattage[1] (W)	System Current (mA)	Color Temp. (K)	Lumen Output[1,2] (lm)	Efficacy (LPW)	Weight (kg)
911401855788	WP60-SCT-G3-10-BZ	Wallpack DS 30-40-50-60W / 30-40-50K BZ	308	30 40 50 **60**	280@120 370@120 465@120 560@120	3000/4000/5000	4350/4800/4560 5800/6400/6080 7250/8000/7600 8700/9600/91200	145/155/152	2.1
911401855888	WP60-SCT-G3-10-WH	Wallpack DS 30-40-50-60W / 30-40-50K WH							
911401855588	WP100-SCT-G3-10-BZ	Wallpack DS 70-80-90-100W / 30-40-50K BZ	476	70 80 90 **100**	650@120 750@120 830@120 930@120	3000/4000/5000	10150/11200/10640 11600/12800/12160 13050/14400/13680 14500/16000/15200	145/155/152	3.3
911401855688	WP100-SCT-G3-10-WH	Wallpack DS 70-80-90-100W / 30-40-50K WH							
911401855988	WP150-SCT-G1-10-BZ	Wallpack DS 120-130-140-150W / 30-40-50K BZ	840	120 130 140 **150**	1100@120 1200@120 1300@120 1390@120	3000/4000/5000	17400/19200/18240 18850/20800/19760 20300/22400/21280 21750/24000/22800	145/155/152	6.1
911401856088	WP150-SCT-G1-10-WH	Wallpack DS 120-130-140-150W / 30-40-50K WH							

1. Wattage and lumen output may vary by due to LED manufacturer forward volt specification and ambient temperature. Wattage shown is average for 120V input. Measured wattage may vary due to variation in input voltage.
2. Lumen values based on photometric tests performed in compliance with IESNA LM-79.

NOTE: Contact outdoorlighting.applications@philips.com for details or additional information.

Predicted Lumen Depreciation Data

Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output.

Calculated per IESNA TM21-11. Published L70 hours limited to 6 times actual LED test hours.

Order Code	Ambient Temperature °C	LED current mA	Driver output current mA	L80 per TM21 hrs	Lumen Maintenance % @ 50000hrs
WP60	**25**	41	500	>50000	>80
WP100	**25**	44	800	>50000	>80
WP150	**25**	38	630	>50000	>80

1. Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output.
2. Calculated per IESNA TM 21-11. Published L70 hours limited to 6 times actual LED test hours.

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

GENLYTE SOLUTIONS
a signify business

Signify North America Corp.
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 800-555-0050

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.

Stonco KEENE

Wall Mount

Wall Pack dual select

60W, 100W, and 150W



Project:

Location:

Cat.No:

Type:

Lamps: Qty:

Notes:

Stonco Keene LED Wall Pack dual select family features energy saving LED technology ideal for wall mounted applications. The Wall pack dual select is available in three sizes to accommodate multiple mounting heights.

Ordering Guide

Example : WP60-SCT-G3-10-BZ

Luminaire	Wattage	Generation	Voltage	Finish
WP		SCT-G3	10	
WP Wall Pack	**60** 30-40-50-60W **100** 70-80-90-100W **150** 120-130-140-150W	**SCT-G3** CCT Selectable 30K/40K/50K, 80CRI, Integrated Daylight Sensor, Generation 3	**10** 120-347V	**BZ** Bronze **WH** White

Specifications

Housing

Die-cast aluminum housing and lens frame with heat and impact resistant borosilicate glass lens.

IP Rating

LED light engine is weather proof sealed in a luminaire rated IP65.

Electrical

Driver efficiency (>84% at full load). Available in 120-347V.

LED Board and Array

1 or 2 Chip on Board (Mid-power) LEDs. Selectable Color temperature 3000K, 4000K, 5000K. Minimum CRI of 80.

Mounting

Mounts to standard 3-½" to 4" round and octagonal or 4 inch square electrical junction boxes. ½ NPT threaded conduit access.

Energy Saving Benefits

System efficacy 155lm/W @ 4000K

Daylight Sensor

Dipswitch on Photocell	Photocell	Luminaire
OFF	Disable	ON
ON (Default)	Ambient light < 5-20lux, Ambient light > 25-50lux	ON OFF

Listings

UL/cUL listed to the UL 1598 standard, suitable for Wet Locations. Suitable for use in ambient from -40° to 40°C (-40° to 104°F).

Product is DesignLights Consortium® qualified.

Finish

Each luminaire receives a powdercoat finish. Can chose between Bronze (BZ) and White (WH) finish.

Limited Warranty


Luminaires are all covered by a 5-year limited warranty. See https://www.genlyte.com/en-us/support/warranties for details.

WP Wall Pack dual select LED

60W, 100W and 150W

Dimensions

unit: mm/inch

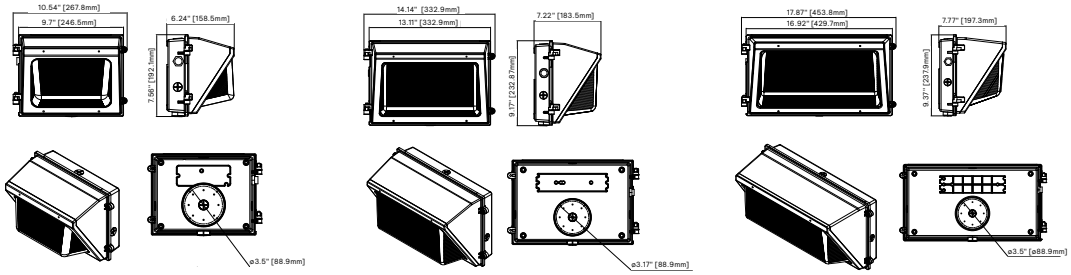

60W 100W 150W

Weight

Product	Weight
WP60W	4.629lbs (2.1kg)
WP100W	7.27lbs (3.3kg)
WP150W	13.4lbs (6.1kg)

LED Wattage and Lumen Values

12NC	Order Codes	Description	Total LEDs	Average System Wattage[1] (W)	System Current (mA)	Color Temp. (K)	Lumen Output[1,2] (lm)	Efficacy (LPW)	Weight (kg)
911401855788	WP60-SCT-G3-10-BZ	Wallpack DS 30-40-50-60W / 30-40-50K BZ	308	30 40 50 **60**	280@120 370@120 465@120 560@120	3000/4000/5000	4350/4800/4560 5800/6400/6080 7250/8000/7600 8700/9600/91200	145/155/152	2.1
911401855888	WP60-SCT-G3-10-WH	Wallpack DS 30-40-50-60W / 30-40-50K WH							
911401855588	WP100-SCT-G3-10-BZ	Wallpack DS 70-80-90-100W / 30-40-50K BZ	476	70 80 90 **100**	650@120 750@120 830@120 930@120	3000/4000/5000	10150/11200/10640 11600/12800/12160 13050/14400/13680 14500/16000/15200	145/155/152	3.3
911401855688	WP100-SCT-G3-10-WH	Wallpack DS 70-80-90-100W / 30-40-50K WH							
911401855988	WP150-SCT-G1-10-BZ	Wallpack DS 120-130-140-150W / 30-40-50K BZ	840	120 130 140 **150**	1100@120 1200@120 1300@120 1390@120	3000/4000/5000	17400/19200/18240 18850/20800/19760 20300/22400/21280 21750/24000/22800	145/155/152	6.1
911401856088	WP150-SCT-G1-10-WH	Wallpack DS 120-130-140-150W / 30-40-50K WH							

1. Wattage and lumen output may vary by due to LED manufacturer forward volt specification and ambient temperature. Wattage shown is average for 120V input. Measured wattage may vary due to variation in input voltage.
2. Lumen values based on photometric tests performed in compliance with IESNA LM-79.

NOTE: Contact outdoorlighting.applications@philips.com for details or additional information.

Predicted Lumen Depreciation Data

Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output.

Calculated per IESNA TM21-11. Published L70 hours limited to 6 times actual LED test hours.

Order Code	Ambient Temperature °C	LED current mA	Driver output current mA	L80 per TM21 hrs	Lumen Maintenance % @ 50000hrs
WP60	**25**	41	500	>50000	>80
WP100	**25**	44	800	>50000	>80
WP150	**25**	38	630	>50000	>80

1. Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output.
2. Calculated per IESNA TM 21-11. Published L70 hours limited to 6 times actual LED test hours.

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

GENLYTE SOLUTIONS
a signify business

Signify North America Corp.
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 800-555-0050

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.