

T3 Ultra Compact CFLs 12,000 Hours average rated life, 120Volts

Applications:


See below

Special Application Options: (Ordering Suffix)



- 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K), Full Spectrum (FS)
- Long Neck 1.65" (165), 1.75" (175), 2.25" (225)
- Wet location (WL)
- Shatter Coat (SS)

Features and Benefits:

- Ultra high efficiency ballast increases lumen output
- Lateral cathode design optimizes thermal efficiency
- Exclusive end of life circuitry
- Long life, 12,000 hours average rated life
- New design and construction improves lumen maintenance over the complete life of the bulb

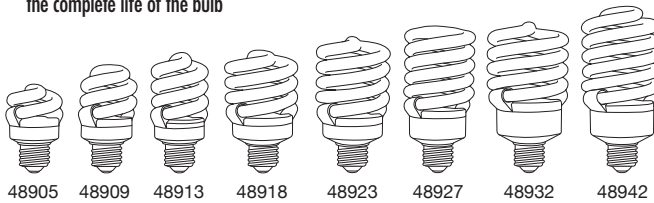

Incandescent Comparison

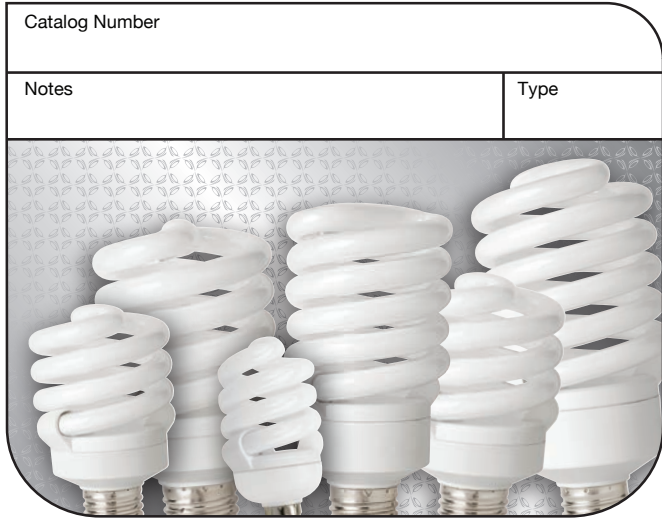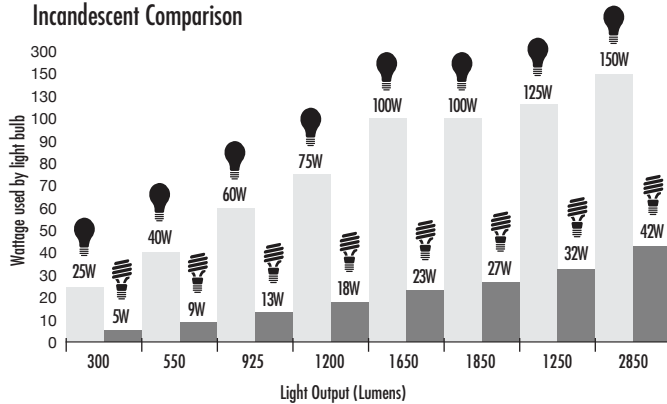

Specifications: (at full brightness)

| | |
|-------------------------------|----------------|
| End of Life Protection | Yes |
| Ballast Type | Electronic |
| Starting Method | Instant Start |
| Input Line Voltage | 120VAC |
| Input Line Frequency | 50/60HZ |
| Color Temperature | 2700°K |
| Color Rendering Index | 82 |
| Minimum Starting Temperature | -20°F, -29°C |
| Maximum Operating Temperature | 160°F, 71°C |
| U.L. / C.U.L. Listed | Yes - E149698 |
| FCC Compliance | 47 CFR Part 18 |
| Lamp Operating Frequency | 45 KHZ |
| Lamp Current Crest Factor | <1.60 |
| Total Harmonic Distortion | <150% |
| Power Factor | >.50 |

Special Application Notes:

- Up to 23w is UL approved for totally enclosed fixtures.
- Use a 27w and 32w in an open recessed can.
- Do not use a 27w and 32w in an enclosed recessed can. Use voids the warranty.
- Do not use a 42w in an enclosed or open recessed can or any type of enclosed fixture. Use voids the warranty.
- Do not use more than two lamps in any type of enclosed luminaire.
- Do not use more than 2 bulbs in an enclosed fixture. If fixture is manufactured for incandescents, use no higher than the CFL equivalent wattage, as shown on chart.



| Warranties and Certifications: | Item # | Wattage | Incandescent Wattage Comparison | Initial Lumens | Input Line Current | M.O.L (inches) | Diameter (inches) | Lamp Life (hours) | Table/Floor Lamps | Chandeliers | Recessed Cans | Bare Bulb Fixtures | High Bay Fixtures | Ceiling Fixtures | Desk Lamp | Outdoor Covered |
|---|--------|---------|---------------------------------|----------------|--------------------|----------------|-------------------|-------------------|-------------------|-------------|---------------|--------------------|-------------------|------------------|-----------|-----------------|
| <p>UL US</p> <p>RoHS Compliant</p> <p>24 MONTH WARRANTY</p> | 48909 | 9 | 40 | 600 | .15a | 3.6 | 1.8 | 12K | • | • | • | • | | • | • | • |
| | 48913 | 13 | 60 | 925 | .22a | 3.9 | 1.8 | 12K | • | • | • | • | | • | • | • |
| | 48913C | 13 | 60 | 925 | .22a | 3.8 | 1.8 | 12K | • | • | • | • | | • | • | • |
| | 48918 | 18 | 75 | 1300 | .30a | 4.0 | 2.4 | 12K | • | • | • | • | | • | • | • |
| | 48923 | 23 | 100 | 1650 | .38a | 4.4 | 2.4 | 12K | • | • | • | • | | • | • | • |
| | 48927 | 27 | 100 | 1850 | .45a | 5.1 | 2.4 | 12K | • | • | • | • | | • | • | • |
| | 48932 | 32 | 125 | 2150 | .53a | 5.1 | 2.7 | 12K | • | • | • | • | | • | • | • |
| | 48942 | 42 | 150 | 2850 | .70a | 5.7 | 2.4 | 12K | • | • | • | • | | • | • | • |





489 Series SpringLamp® Specification

| 48905 | Item # | Description | Wattage | Voltage | Base | CCT | Incandescent Equivalent | Initial Lumens | ENERGY STAR | M.O.L. (inches) | Diameter (inches) | Lamp Life (hours) |
|--------------|--------------|---------------------------------------|---------|---------|------|------|-------------------------|----------------|-------------|-----------------|-------------------|-------------------|
| | 48905 | 5 WATT FULL SPRINGLAMP | 5 | 120 | e26 | 2700 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890530K | 5 WATT FULL SPRINGLAMP 30K | 5 | 120 | e26 | 3000 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890535K | 5 WATT FULL SPRINGLAMP 35K | 5 | 120 | e26 | 3500 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890541K | 5 WATT FULL SPRINGLAMP 41K | 5 | 120 | e26 | 4100 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890550K | 5 WATT FULL SPRINGLAMP 50K | 5 | 120 | e26 | 5000 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 48905C | 5 WATT FULL SPRINGLAMP E12 | 5 | 120 | e12 | 2700 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 48905C35K | 5 WATT FULL SPRINGLAMP E12 35K | 5 | 120 | e12 | 3500 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 48905C41K | 5 WATT FULL SPRINGLAMP E12 41K | 5 | 120 | e12 | 4100 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| 48909 | | | | | | | | | | | | |
| | 48909 | 9 WATT FULL SPRINGLAMP | 9 | 120 | e26 | 2700 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890930K | 9 WATT FULL SPRINGLAMP 30K | 9 | 120 | e26 | 3000 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890935K | 9 WATT FULL SPRINGLAMP 35K | 9 | 120 | e26 | 3500 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890941K | 9 WATT FULL SPRINGLAMP 41K | 9 | 120 | e26 | 4100 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890950K | 9 WATT FULL SPRINGLAMP 50K | 9 | 120 | e26 | 5000 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890965K | 9 WATT FULL SPRINGLAMP 65K | 9 | 120 | e26 | 6500 | 40 | 550 | | 3.60 | 1.80 | 12,000 |
| | 48909C | 9 WATT FULL SPRINGLAMP Candel | 9 | 120 | e12 | 2700 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 48909C41K | 9 WATT FULL SPRINGLAMP Candel 41K | 9 | 120 | e12 | 4100 | 40 | 550 | | 3.60 | 1.80 | 12,000 |
| | 48909C50K | 9 WATT FULL SPRINGLAMP Candel 50K | 9 | 120 | e12 | 5000 | 40 | 550 | | 3.60 | 1.80 | 12,000 |
| | 48909PERM | 9 WATT SPRINGLAMP PRO PERM | 9 | 120 | e26 | 2700 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 48909Y | 9 WATT FULL SPRINGLAMP Bug | 9 | 120 | e26 | - | 40 | - | | 3.60 | 1.80 | 12,000 |
| 48913 | | | | | | | | | | | | |
| | 48913 | 13 WATT FULL SPRINGLAMP | 13 | 120 | e26 | 2700 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891330K | 13 WATT FULL SPRINGLAMP 30K | 13 | 120 | e26 | 3000 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891335K | 13 WATT FULL SPRINGLAMP 35K | 13 | 120 | e26 | 3500 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891341K | 13 WATT FULL SPRINGLAMP 41K | 13 | 120 | e26 | 4100 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891350K | 13 WATT FULL SPRINGLAMP 50K | 13 | 120 | e26 | 5000 | 60 | 900 | | 3.90 | 1.80 | 12,000 |
| | 4891365K | 13 WATT FULL SPRINGLAMP 65K | 13 | 120 | e26 | 6500 | 60 | 900 | | 3.90 | 1.80 | 12,000 |
| | 48913BL | 13 WATT FULL SPRINGLAMP Blue | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913C | 13 WATT FULL SPRINGLAMP E12 | 13 | 120 | e12 | 2700 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 48913C30K | 13 WATT FULL SPRINGLAMP Candel 30K | 13 | 120 | e12 | 3000 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 48913C35K | 13 WATT FULL SPRINGLAMP Candel 35K | 13 | 120 | e12 | 3500 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913C41K | 13 WATT FULL SPRINGLAMP Candel 41K | 13 | 120 | e12 | 4100 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913C50K | 13 WATT SPRINGLAMP PRO E12 50K | 13 | 120 | e12 | 5000 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913C65K | 13 WATT SPRINGLAMP PRO E12 65K | 13 | 120 | e12 | 6500 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913FS | 13 WATT FULL SPRINGLAMP Full Spectrum | 13 | 120 | e26 | - | 60 | 700 | | 3.90 | 1.80 | 12,000 |
| | 48913GR | 13 WATT FULL SPRINGLAMP Green | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913P | 13 WATT FULL SPRINGLAMP PINK | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913PERM | 13 WATT FULL SPRINGLAMP PERM BASE | 13 | 120 | e26 | 2700 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 48913RD | 13 WATT FULL SPRINGLAMP Red | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913Y | 13 WATT FULL SPRINGLAMP Bug | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| 48918 | | | | | | | | | | | | |
| | 48918 | 18 WATT FULL SPRINGLAMP | 18 | 120 | e26 | 2700 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891830K | 18 WATT FULL SPRINGLAMP 30K | 18 | 120 | e26 | 3000 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891835K | 18 WATT FULL SPRINGLAMP 35K | 18 | 120 | e26 | 3500 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891841K | 18 WATT FULL SPRINGLAMP 41K | 18 | 120 | e26 | 4100 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891850K | 18 WATT FULL SPRINGLAMP 50K | 18 | 120 | e26 | 5000 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891865K | 18 WATT FULL SPRINGLAMP 65K | 18 | 120 | e26 | 6500 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 48918C | 18 WATT FULL SPRINGLAMP Candel | 18 | 120 | e12 | 2700 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 48918C41K | 18 WATT FULL SPRINGLAMP Candel 41K | 18 | 120 | e12 | 4100 | 75 | 1,200 | | 4.00 | 2.40 | 12,000 |
| | 48918PERM | 18 WATT FULL SPRINGLAMP PERM BASE | 18 | 120 | e26 | 2700 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 48918Y | 18 WATT FULL SPRINGLAMP Bug | 18 | 120 | e26 | - | 75 | - | | 4.00 | 2.40 | 12,000 |
| 48923 | | | | | | | | | | | | |
| | 48923 | 23 WATT FULL SPRINGLAMP | 23 | 120 | e26 | 2700 | 100 | 1,650 | yes | 4.00 | 2.40 | 12,000 |
| | 4892317550K | 23 WATT FULL SPRINGLAMP 1.75 50K | 23 | 120 | e26 | 5000 | 100 | 1,550 | | 4.00 | 2.40 | 12,000 |
| | 48923225 | 23 WATT FULL SPRINGLAMP 2.25 | 23 | 120 | e26 | 2700 | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| | 4892322541K | 23 WATT FULL SPRINGLAMP 2.25 41K | 23 | 120 | e26 | 4100 | 100 | 1,550 | | 4.00 | 2.40 | 12,000 |
| | 4892330K | 23 WATT FULL SPRINGLAMP 30K | 23 | 120 | e26 | 3000 | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| | 4892335K | 23 WATT FULL SPRINGLAMP 35K | 23 | 120 | e26 | 3500 | 100 | 1,650 | yes | 4.00 | 2.40 | 12,000 |
| | 4892341K | 23 WATT FULL SPRINGLAMP 41K | 23 | 120 | e26 | 4100 | 100 | 1,650 | yes | 4.00 | 2.40 | 12,000 |
| | 4892350K | 23 WATT FULL SPRINGLAMP 50K | 23 | 120 | e26 | 5000 | 100 | 1,600 | yes | 4.00 | 2.40 | 12,000 |
| | 4892365K | 23 WATT FULL SPRINGLAMP 65K | 23 | 120 | e26 | 6500 | 100 | 1,550 | | 4.00 | 2.40 | 12,000 |
| | 48923F2 | 23 WATT SPRINGLAMP PRO FRESH2 | 23 | 120 | e26 | - | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| | 48923F5 | 23 WATT FULL SPRINGLAMP Full Spect | 23 | 120 | e26 | - | 100 | 1,400 | | 4.00 | 2.40 | 12,000 |
| | 48923PERM | 23 WATT FULL SPRINGLAMP PERM BASE | 23 | 120 | e26 | 2700 | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| 48927 | | | | | | | | | | | | |
| | 48927 | 27 WATT FULL SPRINGLAMP | 27 | 120 | e26 | 2700 | 100 | 1,850 | | 5.10 | 2.40 | 12,000 |
| | 48927225 | 27 WATT FULL SPRINGLAMP 2.25 | 27 | 120 | e26 | 2700 | 100 | 1,850 | | 5.50 | 2.40 | 12,000 |
| | 4892722541K | 27 WATT FULL SPRINGLAMP 2.25 41K | 27 | 120 | e26 | 4100 | 100 | 1,850 | | 5.50 | 2.40 | 12,000 |
| | 4892730K | 27 WATT FULL SPRINGLAMP 30K | 27 | 120 | e26 | 3000 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| | 4892735K | 27 WATT FULL SPRINGLAMP 35K | 27 | 120 | e26 | 3500 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| | 4892741K | 27 WATT FULL SPRINGLAMP 41K | 27 | 120 | e26 | 4100 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| | 4892750K | 27 WATT FULL SPRINGLAMP 50K | 27 | 120 | e26 | 5000 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| 48932 | | | | | | | | | | | | |
| | 48932 | 32 WATT FULL SPRINGLAMP | 32 | 120 | e26 | 2700 | 125 | 2,150 | | 5.10 | 2.70 | 12,000 |
| | 4893230K | 32 WATT FULL SPRINGLAMP 30K | 32 | 120 | e26 | 3000 | 125 | 2,150 | | 5.10 | 2.70 | 12,000 |
| | 4893235K | 32 WATT FULL SPRINGLAMP 35K | 32 | 120 | e26 | 3500 | 125 | 2,150 | yes | 5.10 | 2.70 | 12,000 |
| | 4893241K | 32 WATT FULL SPRINGLAMP 41K | 32 | 120 | e26 | 4100 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| | 4893250K | 32 WATT FULL SPRINGLAMP 50K | 32 | 120 | e26 | 5000 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| | 4893265K | 32 WATT FULL SPRINGLAMP 65K | 32 | 120 | e26 | 6500 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| | 48932PERM41K | 32 WATT FULL SPRINGLAMP PERM 41K | 32 | 120 | e26 | 4100 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| 48942 | | | | | | | | | | | | |
| | 48942 | 42 WATT FULL SPRINGLAMP | 42 | 120 | e26 | 2700 | 150 | 2,800 | | 5.70 | 2.70 | 12,000 |
| | 4894230K | 42 WATT FULL SPRINGLAMP 30K | 42 | 120 | e26 | 3000 | 150 | 2,750 | | 5.70 | 2.70 | 12,000 |
| | 4894235K | 42 WATT FULL SPRINGLAMP 35K | 42 | 120 | e26 | 3500 | 150 | 2,750 | | 5.70 | 2.70 | 12,000 |
| | 4894241K | 42 WATT FULL SPRINGLAMP 41K | 42 | 120 | e26 | 4100 | 150 | 2,700 | | 5.70 | 2.70 | 12,000 |
| | 4894250K | 42 WATT FULL SPRINGLAMP 50K | 42 | 120 | e26 | 5000 | 150 | 2,700 | | 5.70 | 2.70 | 12,000 |
| | 4894265K | 42 WATT FULL SPRINGLAMP 65K | 42 | 120 | e26 | 6500 | 150 | 2,650 | | 5.70 | 2.70 | 12,000 |
| | 48942PERM50K | 42 WATT FULL SPRINGLAMP PERM 50K | 42 | 120 | e26 | 5000 | 150 | 2,750 | | 5.70 | 2.70 | 12,000 |



T3 Ultra Compact CFLs 12,000 Hours average rated life, 120Volts

Applications:


See below

Special Application Options: (Ordering Suffix)



- 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K), Full Spectrum (FS)
- Long Neck 1.65" (165), 1.75" (175), 2.25" (225)
- Wet location (WL)
- Shatter Coat (SS)

Features and Benefits:

- Ultra high efficiency ballast increases lumen output
- Lateral cathode design optimizes thermal efficiency
- Exclusive end of life circuitry
- Long life, 12,000 hours average rated life
- New design and construction improves lumen maintenance over the complete life of the bulb

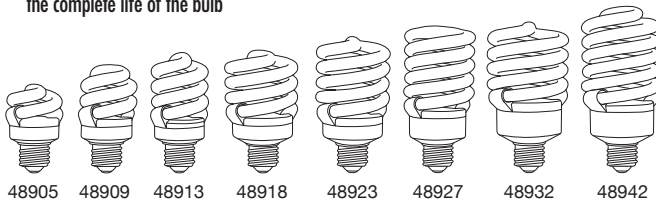

Incandescent Comparison

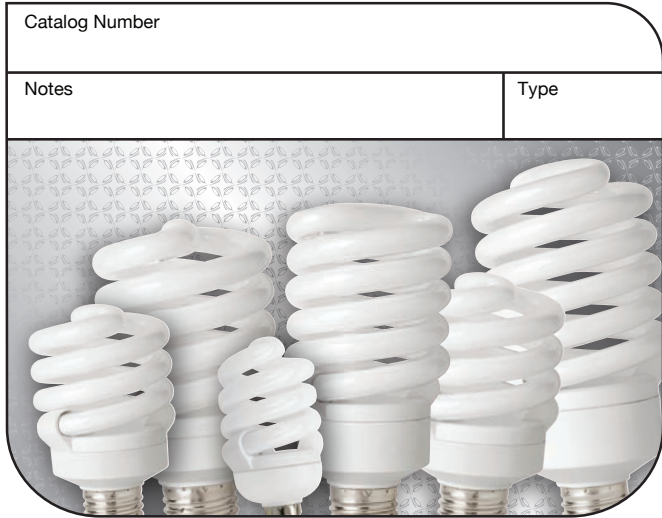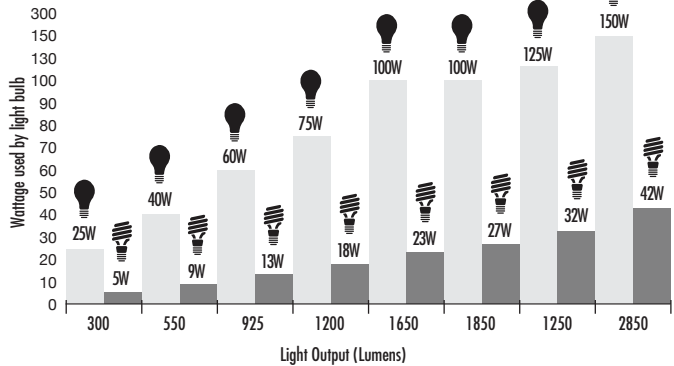

Specifications: (at full brightness)

| | |
|-------------------------------|----------------|
| End of Life Protection | Yes |
| Ballast Type | Electronic |
| Starting Method | Instant Start |
| Input Line Voltage | 120VAC |
| Input Line Frequency | 50/60HZ |
| Color Temperature | 2700°K |
| Color Rendering Index | 82 |
| Minimum Starting Temperature | -20°F, -29°C |
| Maximum Operating Temperature | 160°F, 71°C |
| U.L. / C.U.L. Listed | Yes - E149698 |
| FCC Compliance | 47 CFR Part 18 |
| Lamp Operating Frequency | 45 KHZ |
| Lamp Current Crest Factor | <1.60 |
| Total Harmonic Distortion | <150% |
| Power Factor | >.50 |

Special Application Notes:

- Up to 23w is UL approved for totally enclosed fixtures.
- Use a 27w and 32w in an open recessed can.
- Do not use a 27w and 32w in an enclosed recessed can. Use voids the warranty.
- Do not use a 42w in an enclosed or open recessed can or any type of enclosed fixture. Use voids the warranty.
- Do not use more than two lamps in any type of enclosed luminaire.
- Do not use more than 2 bulbs in an enclosed fixture. If fixture is manufactured for incandescents, use no higher than the CFL equivalent wattage, as shown on chart.



Warranties and Certifications:

UL US

RoHS Compliant

24 MONTH WARRANTY

| Item # | Wattage | Incandescent Wattage Comparison | Initial Lumens | Input Line Current | M.O.L (inches) | Diameter (inches) | Lamp Life (hours) | Table/Floor Lamps | Chandeliers | Recessed Cans | Bare Bulb Fixtures | High Bay Fixtures | Ceiling Fixtures | Desk Lamp | Outdoor Covered |
|--------|---------|---------------------------------|----------------|--------------------|----------------|-------------------|-------------------|-------------------|-------------|---------------|--------------------|-------------------|------------------|-----------|-----------------|
| 48909 | 9 | 40 | 600 | .15a | 3.6 | 1.8 | 12K | • | • | • | • | | • | • | • |
| 48913 | 13 | 60 | 925 | .22a | 3.9 | 1.8 | 12K | • | • | • | • | | • | • | • |
| 48913C | 13 | 60 | 925 | .22a | 3.8 | 1.8 | 12K | • | • | • | • | | • | • | • |
| 48918 | 18 | 75 | 1300 | .30a | 4.0 | 2.4 | 12K | • | • | • | • | | • | • | • |
| 48923 | 23 | 100 | 1650 | .38a | 4.4 | 2.4 | 12K | • | • | • | • | | • | • | • |
| 48927 | 27 | 100 | 1850 | .45a | 5.1 | 2.4 | 12K | • | • | • | • | | • | • | • |
| 48932 | 32 | 125 | 2150 | .53a | 5.1 | 2.7 | 12K | • | • | • | • | | • | • | • |
| 48942 | 42 | 150 | 2850 | .70a | 5.7 | 2.4 | 12K | • | • | • | • | | • | • | • |





489 Series SpringLamp® Specification

| 48905 | Item # | Description | Wattage | Voltage | Base | CCT | Incandescent Equivalent | Initial Lumens | ENERGY STAR | M.O.L. (inches) | Diameter (inches) | Lamp Life (hours) |
|--------------|--------------|---------------------------------------|---------|---------|------|------|-------------------------|----------------|-------------|-----------------|-------------------|-------------------|
| | 48905 | 5 WATT FULL SPRINGLAMP | 5 | 120 | e26 | 2700 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890530K | 5 WATT FULL SPRINGLAMP 30K | 5 | 120 | e26 | 3000 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890535K | 5 WATT FULL SPRINGLAMP 35K | 5 | 120 | e26 | 3500 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890541K | 5 WATT FULL SPRINGLAMP 41K | 5 | 120 | e26 | 4100 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 4890550K | 5 WATT FULL SPRINGLAMP 50K | 5 | 120 | e26 | 5000 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 48905C | 5 WATT FULL SPRINGLAMP E12 | 5 | 120 | e12 | 2700 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 48905C35K | 5 WATT FULL SPRINGLAMP E12 35K | 5 | 120 | e12 | 3500 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| | 48905C41K | 5 WATT FULL SPRINGLAMP E12 41K | 5 | 120 | e12 | 4100 | 25 | 300 | | 3.00 | 1.90 | 6,000 |
| 48909 | | | | | | | | | | | | |
| | 48909 | 9 WATT FULL SPRINGLAMP | 9 | 120 | e26 | 2700 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890930K | 9 WATT FULL SPRINGLAMP 30K | 9 | 120 | e26 | 3000 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890935K | 9 WATT FULL SPRINGLAMP 35K | 9 | 120 | e26 | 3500 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890941K | 9 WATT FULL SPRINGLAMP 41K | 9 | 120 | e26 | 4100 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890950K | 9 WATT FULL SPRINGLAMP 50K | 9 | 120 | e26 | 5000 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 4890965K | 9 WATT FULL SPRINGLAMP 65K | 9 | 120 | e26 | 6500 | 40 | 550 | | 3.60 | 1.80 | 12,000 |
| | 48909C | 9 WATT FULL SPRINGLAMP Candel | 9 | 120 | e12 | 2700 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 48909C41K | 9 WATT FULL SPRINGLAMP Candel 41K | 9 | 120 | e12 | 4100 | 40 | 550 | | 3.60 | 1.80 | 12,000 |
| | 48909C50K | 9 WATT FULL SPRINGLAMP Candel 50K | 9 | 120 | e12 | 5000 | 40 | 550 | | 3.60 | 1.80 | 12,000 |
| | 48909PERM | 9 WATT SPRINGLAMP PRO PERM | 9 | 120 | e26 | 2700 | 40 | 600 | | 3.60 | 1.80 | 12,000 |
| | 48909Y | 9 WATT FULL SPRINGLAMP Bug | 9 | 120 | e26 | - | 40 | - | | 3.60 | 1.80 | 12,000 |
| 48913 | | | | | | | | | | | | |
| | 48913 | 13 WATT FULL SPRINGLAMP | 13 | 120 | e26 | 2700 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891330K | 13 WATT FULL SPRINGLAMP 30K | 13 | 120 | e26 | 3000 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891335K | 13 WATT FULL SPRINGLAMP 35K | 13 | 120 | e26 | 3500 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891341K | 13 WATT FULL SPRINGLAMP 41K | 13 | 120 | e26 | 4100 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 4891350K | 13 WATT FULL SPRINGLAMP 50K | 13 | 120 | e26 | 5000 | 60 | 900 | | 3.90 | 1.80 | 12,000 |
| | 4891365K | 13 WATT FULL SPRINGLAMP 65K | 13 | 120 | e26 | 6500 | 60 | 900 | | 3.90 | 1.80 | 12,000 |
| | 48913BL | 13 WATT FULL SPRINGLAMP Blue | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913C | 13 WATT FULL SPRINGLAMP E12 | 13 | 120 | e12 | 2700 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 48913C30K | 13 WATT FULL SPRINGLAMP Candel 30K | 13 | 120 | e12 | 3000 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 48913C35K | 13 WATT FULL SPRINGLAMP Candel 35K | 13 | 120 | e12 | 3500 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913C41K | 13 WATT FULL SPRINGLAMP Candel 41K | 13 | 120 | e12 | 4100 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913C50K | 13 WATT SPRINGLAMP PRO E12 50K | 13 | 120 | e12 | 5000 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913C65K | 13 WATT SPRINGLAMP PRO E12 65K | 13 | 120 | e12 | 6500 | 60 | 850 | | 3.90 | 1.80 | 12,000 |
| | 48913FS | 13 WATT FULL SPRINGLAMP Full Spectrum | 13 | 120 | e26 | - | 60 | 700 | | 3.90 | 1.80 | 12,000 |
| | 48913GR | 13 WATT FULL SPRINGLAMP Green | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913P | 13 WATT FULL SPRINGLAMP PINK | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913PERM | 13 WATT FULL SPRINGLAMP PERM BASE | 13 | 120 | e26 | 2700 | 60 | 925 | | 3.90 | 1.80 | 12,000 |
| | 48913RD | 13 WATT FULL SPRINGLAMP Red | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| | 48913Y | 13 WATT FULL SPRINGLAMP Bug | 13 | 120 | e26 | - | 60 | - | | 3.90 | 1.80 | 12,000 |
| 48918 | | | | | | | | | | | | |
| | 48918 | 18 WATT FULL SPRINGLAMP | 18 | 120 | e26 | 2700 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891830K | 18 WATT FULL SPRINGLAMP 30K | 18 | 120 | e26 | 3000 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891835K | 18 WATT FULL SPRINGLAMP 35K | 18 | 120 | e26 | 3500 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891841K | 18 WATT FULL SPRINGLAMP 41K | 18 | 120 | e26 | 4100 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891850K | 18 WATT FULL SPRINGLAMP 50K | 18 | 120 | e26 | 5000 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 4891865K | 18 WATT FULL SPRINGLAMP 65K | 18 | 120 | e26 | 6500 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 48918C | 18 WATT FULL SPRINGLAMP Candel | 18 | 120 | e12 | 2700 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 48918C41K | 18 WATT FULL SPRINGLAMP Candel 41K | 18 | 120 | e12 | 4100 | 75 | 1,200 | | 4.00 | 2.40 | 12,000 |
| | 48918PERM | 18 WATT FULL SPRINGLAMP PERM BASE | 18 | 120 | e26 | 2700 | 75 | 1,300 | | 4.00 | 2.40 | 12,000 |
| | 48918Y | 18 WATT FULL SPRINGLAMP Bug | 18 | 120 | e26 | - | 75 | - | | 4.00 | 2.40 | 12,000 |
| 48923 | | | | | | | | | | | | |
| | 48923 | 23 WATT FULL SPRINGLAMP | 23 | 120 | e26 | 2700 | 100 | 1,650 | yes | 4.00 | 2.40 | 12,000 |
| | 4892317550K | 23 WATT FULL SPRINGLAMP 1.75 50K | 23 | 120 | e26 | 5000 | 100 | 1,550 | | 4.00 | 2.40 | 12,000 |
| | 48923225 | 23 WATT FULL SPRINGLAMP 2.25 | 23 | 120 | e26 | 2700 | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| | 4892322541K | 23 WATT FULL SPRINGLAMP 2.25 41K | 23 | 120 | e26 | 4100 | 100 | 1,550 | | 4.00 | 2.40 | 12,000 |
| | 4892330K | 23 WATT FULL SPRINGLAMP 30K | 23 | 120 | e26 | 3000 | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| | 4892335K | 23 WATT FULL SPRINGLAMP 35K | 23 | 120 | e26 | 3500 | 100 | 1,650 | yes | 4.00 | 2.40 | 12,000 |
| | 4892341K | 23 WATT FULL SPRINGLAMP 41K | 23 | 120 | e26 | 4100 | 100 | 1,650 | yes | 4.00 | 2.40 | 12,000 |
| | 4892350K | 23 WATT FULL SPRINGLAMP 50K | 23 | 120 | e26 | 5000 | 100 | 1,600 | yes | 4.00 | 2.40 | 12,000 |
| | 4892365K | 23 WATT FULL SPRINGLAMP 65K | 23 | 120 | e26 | 6500 | 100 | 1,550 | | 4.00 | 2.40 | 12,000 |
| | 48923F2 | 23 WATT SPRINGLAMP PRO FRESH2 | 23 | 120 | e26 | - | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| | 48923F5 | 23 WATT FULL SPRINGLAMP Full Spect | 23 | 120 | e26 | - | 100 | 1,400 | | 4.00 | 2.40 | 12,000 |
| | 48923PERM | 23 WATT FULL SPRINGLAMP PERM BASE | 23 | 120 | e26 | 2700 | 100 | 1,650 | | 4.00 | 2.40 | 12,000 |
| 48927 | | | | | | | | | | | | |
| | 48927 | 27 WATT FULL SPRINGLAMP | 27 | 120 | e26 | 2700 | 100 | 1,850 | | 5.10 | 2.40 | 12,000 |
| | 48927225 | 27 WATT FULL SPRINGLAMP 2.25 | 27 | 120 | e26 | 2700 | 100 | 1,850 | | 5.50 | 2.40 | 12,000 |
| | 4892722541K | 27 WATT FULL SPRINGLAMP 2.25 41K | 27 | 120 | e26 | 4100 | 100 | 1,850 | | 5.50 | 2.40 | 12,000 |
| | 4892730K | 27 WATT FULL SPRINGLAMP 30K | 27 | 120 | e26 | 3000 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| | 4892735K | 27 WATT FULL SPRINGLAMP 35K | 27 | 120 | e26 | 3500 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| | 4892741K | 27 WATT FULL SPRINGLAMP 41K | 27 | 120 | e26 | 4100 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| | 4892750K | 27 WATT FULL SPRINGLAMP 50K | 27 | 120 | e26 | 5000 | 100 | 1,850 | yes | 5.10 | 2.40 | 12,000 |
| 48932 | | | | | | | | | | | | |
| | 48932 | 32 WATT FULL SPRINGLAMP | 32 | 120 | e26 | 2700 | 125 | 2,150 | | 5.10 | 2.70 | 12,000 |
| | 4893230K | 32 WATT FULL SPRINGLAMP 30K | 32 | 120 | e26 | 3000 | 125 | 2,150 | | 5.10 | 2.70 | 12,000 |
| | 4893235K | 32 WATT FULL SPRINGLAMP 35K | 32 | 120 | e26 | 3500 | 125 | 2,150 | yes | 5.10 | 2.70 | 12,000 |
| | 4893241K | 32 WATT FULL SPRINGLAMP 41K | 32 | 120 | e26 | 4100 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| | 4893250K | 32 WATT FULL SPRINGLAMP 50K | 32 | 120 | e26 | 5000 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| | 4893265K | 32 WATT FULL SPRINGLAMP 65K | 32 | 120 | e26 | 6500 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| | 48932PERM41K | 32 WATT FULL SPRINGLAMP PERM 41K | 32 | 120 | e26 | 4100 | 125 | 2,050 | | 5.10 | 2.70 | 12,000 |
| 48942 | | | | | | | | | | | | |
| | 48942 | 42 WATT FULL SPRINGLAMP | 42 | 120 | e26 | 2700 | 150 | 2,800 | | 5.70 | 2.70 | 12,000 |
| | 4894230K | 42 WATT FULL SPRINGLAMP 30K | 42 | 120 | e26 | 3000 | 150 | 2,750 | | 5.70 | 2.70 | 12,000 |
| | 4894235K | 42 WATT FULL SPRINGLAMP 35K | 42 | 120 | e26 | 3500 | 150 | 2,750 | | 5.70 | 2.70 | 12,000 |
| | 4894241K | 42 WATT FULL SPRINGLAMP 41K | 42 | 120 | e26 | 4100 | 150 | 2,700 | | 5.70 | 2.70 | 12,000 |
| | 4894250K | 42 WATT FULL SPRINGLAMP 50K | 42 | 120 | e26 | 5000 | 150 | 2,700 | | 5.70 | 2.70 | 12,000 |
| | 4894265K | 42 WATT FULL SPRINGLAMP 65K | 42 | 120 | e26 | 6500 | 150 | 2,650 | | 5.70 | 2.70 | 12,000 |
| | 48942PERM50K | 42 WATT FULL SPRINGLAMP PERM 50K | 42 | 120 | e26 | 5000 | 150 | 2,750 | | 5.70 | 2.70 | 12,000 |

