



Catalog Number
Notes
Type

## Contractor Select™ EXR & EXG LED Exits

The Lithonia Lighting® EXG/EXR LED Exit Signs are suitable for emergency lighting applications such as stairways and hallways. This fully assembled single-face exit with extra faceplate is available in red and green letters. It's low profile makes it ideal for safely illuminated the path of egress in small spaces and can be wall or ceiling mounted. The emergency power provides 90 minutes of illumination in the event of a power loss.

### FEATURES:

- Test switch and status indicator for low maintenance (EL emergency models only)
- UL indoor damp location 50° to 104°F (10°C to 40°C) listed standard
- For use with Dual voltage 120/277VAC



EXR LED EL



EXG LED EL



Catalog Number	UPC	Description	Supply Voltage	Input Wattage		Input Amps		Pallet Qty	Carton Qty
				120	277	120	277		
EXR LED M6	784231874684	Red exit, AC only	120/277	1.0W	1.0W	0.09	0.09	360	6
EXG LED M6	784231874806	Green exit, AC only	120/277	1.0W	1.0W	0.09	0.09	360	6
EXR LED EL M6	784231874738	Red exit with backup battery	120/277	1.0W	1.0W	0.09	0.09	360	6
EXG LED EL M6	784231874851	Green exit with backup battery	120/277	1.0W	1.0W	0.09	0.09	360	6

### Accessories<sup>1</sup>: Order as separate catalog number.

ELA WG1	Wireguard (back mount only, 13 3/4"H x 15 1/4"W x 6"D)
ELA WGEXT	Wireguard (top mount only, 11"H x 18"W x 11"D)
ELA WGEXE	Wireguard (end mount only, 11"H x 15"W x 4-3/4"D)

### NOTES

1. See spec sheet [ELA-WG](#) for more information.



## Specifications

### INTENDED USE:

LED lighted exit signs for marking the means of egress in accordance with Life Safety Code NFPA 101.

### CONSTRUCTION:

Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern. Universal chevrons are easily removed for directional indication.

Fully assembled single face with extra faceplate for easy field-conversion to double face.

Letters 6" high with 3/4" stroke, with 100 ft viewing distance rating, based on UL924 standards.

### OPTICS:

The typical life of the LED lamp is 10 years.

### ELECTRICAL:

Dual-voltage input 120V or 277V AC. Non-emergency (AC only without battery) or Emergency exit with battery. The emergency model includes the test switch, status indicator and rechargeable battery.

Battery: (EL models) maintenance-free ni-cad battery provides 90 minutes of emergency power.

### INSTALLATION:

Top, back or end mounting capability (canopy included).

### LISTINGS:

UL Listed. Meets UL 924, NFPA 101, NFPA 70-NEC and OSHA illumination standards. Indoor damp location 50° to 104°F (10°C to 40°C) listed standard.

### WARRANTY:

2-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.


## Dimensions

Length: 11.63 (29.5)

Depth: 1.63 (4.1)

Height: 7.2 (18.3)

Weight: 2.1 LB

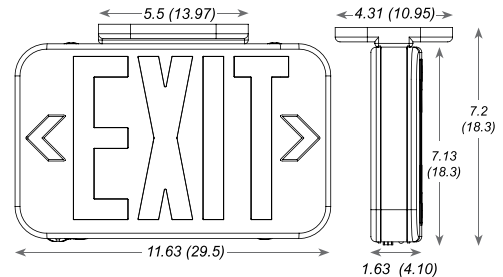

All dimensions are inches (centimeters) unless otherwise indicated.