

DESCRIPTION

The HBI series is an outstanding solution for high mounting height industrial or retail applications. The HBI optic has been optimized to provide maximum performance from T8 lamps. Optional uplight component is provided to enable excellent ceiling uniformity. HBI's high lumen package allows the benefits of fluorescent to be applied at high mounting heights that were traditionally exclusive to H.I.D. The primary benefits include exceptional color rendering, high system efficacy, 95% lumen maintenance, long lamp life, instant on/instant re-strike, economical dimming, and uniform brightness control. Primary applications include retail, shopping malls, light industrial, gymnasiums and recreational environments.

SPECIFICATION FEATURES

Construction

Full bodied steel housing with integral ballast channel adds strength, rigidity and structural protection for optical assembly.

Electrical

The HBI comes with a standard Class P electronic ballast and twistlock lampholders. UL/cUL listed for high ambient environments up to 55°C (131°F) for all lamps and ballast combinations when used in open upright configurations. Suitable for damp locations. Optional modular power receptacle meets UL2459 and NEC 410.73 and is UL/cUL rated for make and break under load from outside the luminaire to speed maintenance.

Finish

White enamel finish preceded by a multistage cleaning cycle, iron phosphate coating with rust inhibitor to protect against contaminants and oxidation.

Downlight/Uplight Optics

Die formed, segmented optical design optimizes performance across three distributions. Optical choices include a narrow distribution for aisles, medium distribution for assembly and loading areas, or wide distribution for general, open area lighting. An upright option is offered to permit ceiling uniformity and allow for ample lamp and luminaire heat dissipation. Gasketed door frame & lens assembly is optional for more demanding environments.

| | | |
|-------------|--|------|
| Catalog # | | Type |
| Project | | |
| Comments | | Date |
| Prepared by | | |

Options

Integral Occupancy Sensor available and provides from 600 sq. ft. (MS) up to 1250 sq. ft. (MSO) of coverage at a maximum mounting height of 40' using interchangeable lens caps provided.

Mounting

The HBI series is suited for suspension mounting with optional wire hook and chain set or cable mounting. Single monopoint mounting is available with SPM Tong Hanger.

Warranty


When operated in high ambient conditions, the HBI is supported by a 5 yr/55°C and 3 yr/65°C ballast warranty when used with a high power factor ballast in open, upright configurations. To maximize your warranty, the HBI should be ordered with a high power factor ballast in ambient environments that typically exceed 40°C (102°F).




HBI SERIES

4 OR 5 T8 LAMPS


High-Bay Industrial
Fluorescent Luminaire

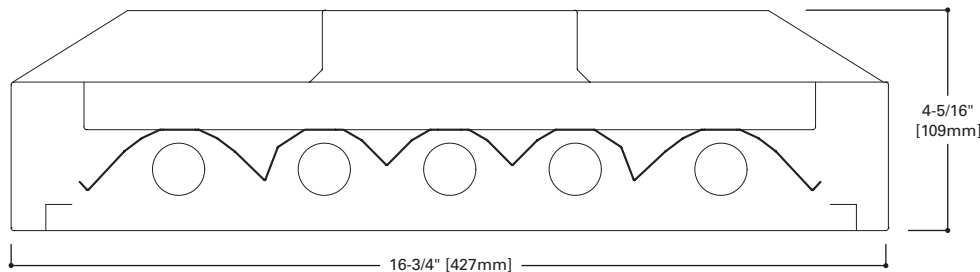

LAMP CONFIGURATIONS

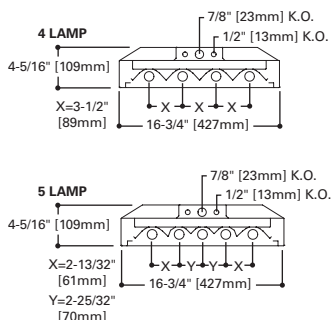

DIMENSION TOP VIEW

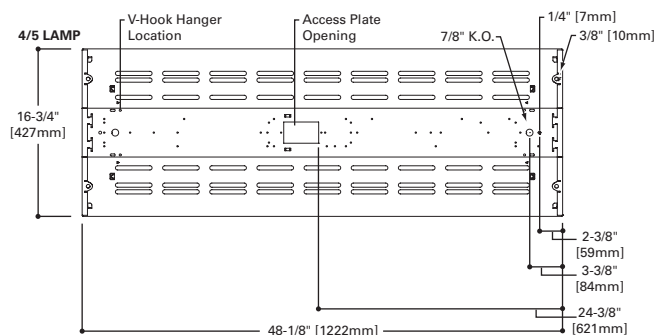

ENERGY DATA

Input Watts:

EB Ballast
432 (109), 532 (133)

EB/Plus Ballast
432 (145), 532 (182)

Luminaire Efficacy Rating
LER = FL-83 (Narrow Beam)
Catalog Number: HBI-432-N

Yearly Cost of 1000 lumens,
3000 hrs at .08 KWH = \$2.88

*Reference the lamp/ballast data in the
Technical Section for specific lamp/ballast
requirements.


**Consult Pre Sales Technical Support.

**LAMPS CONTAIN MERCURY. DISPOSE ACCORDING
TO LOCAL, STATE OR FEDERAL LAWS**

LINEAR DISCONNECT


Safe and convenient means of
disconnecting power.

PHOTOMETRICS

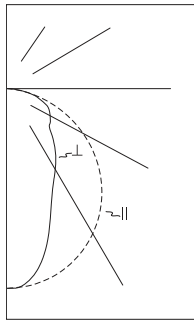

HBI-432-N-UNV-EB81/PLUS
 Electronic Ballasts
 (4) 32W T8 Lamps
 3100 lumens
 Spacing criterion:
 (||) 1.3 x mounting height,
 (⊥) 0.8 x mounting height
 Efficiency 90.5%
 Test Report: HBI432
 LER =FL-83
 Yearly Cost of 1000 lumens, 3000 hrs at .08 KWH = \$2.88

| Candela | | | |
|---------|-------|------|----------|
| Angle | Along | 45° | Across ⊥ |
| 0 | 5703 | 5703 | 5703 |
| 5 | 5674 | 5641 | 5614 |
| 10 | 5603 | 5400 | 5189 |
| 15 | 5488 | 4970 | 4478 |
| 20 | 5318 | 4382 | 3659 |
| 25 | 5102 | 3691 | 3096 |
| 30 | 4842 | 3108 | 2736 |
| 35 | 4540 | 2680 | 2429 |
| 40 | 4192 | 2348 | 2096 |
| 45 | 3808 | 2037 | 1774 |
| 50 | 3391 | 1704 | 1583 |
| 55 | 2943 | 1390 | 1505 |
| 60 | 2465 | 1200 | 1408 |
| 65 | 1978 | 1083 | 1301 |
| 70 | 1478 | 963 | 1082 |
| 75 | 982 | 777 | 864 |
| 80 | 514 | 537 | 545 |
| 85 | 135 | 233 | 195 |
| 90 | 0 | 0 | 0 |

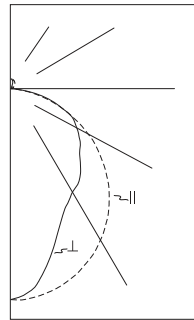

HBI-532-N-UNV-EB82/PLUS-UPL
 Electronic Ballasts
 (5) 32W T8 Lamps
 3100 lumens
 Spacing criterion:
 (||) 1.3 x mounting height,
 (⊥) 0.8 x mounting height
 Efficiency 90.4%
 Test Report: HBI532-UPL
 LER =FL-85
 Yearly Cost of 1000 lumens, 3000 hrs at .08 KWH = \$2.81

| Candela | | | |
|---------|-------|------|----------|
| Angle | Along | 45° | Across ⊥ |
| 0 | 5983 | 5983 | 5983 |
| 5 | 5976 | 5878 | 5795 |
| 10 | 5885 | 5603 | 5309 |
| 15 | 5748 | 5152 | 4681 |
| 20 | 5562 | 4597 | 4103 |
| 25 | 5322 | 4062 | 3697 |
| 30 | 5034 | 3613 | 3450 |
| 35 | 4703 | 3261 | 3317 |
| 40 | 4338 | 2981 | 3085 |
| 45 | 3938 | 2793 | 2781 |
| 50 | 3482 | 2497 | 2575 |
| 55 | 3011 | 2157 | 2366 |
| 60 | 2506 | 1922 | 2147 |
| 65 | 1976 | 1667 | 1931 |
| 70 | 1477 | 1421 | 1479 |
| 75 | 971 | 1063 | 1115 |
| 80 | 494 | 647 | 599 |
| 85 | 111 | 189 | 151 |
| 90 | 0 | 4 | 2 |

Coefficients of Utilization

| rc | Effective floor cavity reflectance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|----|----|----|----|-----|----|----|----|----|----|-----|--|--|--|--|--|----|--|
| | 80% | | | | | | 70% | | | | | | 50% | | | | | | 30% | | | | | | 10% | | | | | | 0% | |
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | 0 | | | | | | | |
| 0 | 108 | 108 | 108 | 108 | 105 | 105 | 105 | 105 | 101 | 101 | 101 | 96 | 96 | 96 | 92 | 92 | 92 | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 90 | | | | | | | |
| 1 | 99 | 94 | 91 | 87 | 96 | 92 | 89 | 86 | 88 | 86 | 83 | 85 | 83 | 80 | 82 | 80 | 78 | 76 | 76 | 76 | 76 | 76 | 76 | 76 | 76 | | | | | | | |
| 2 | 90 | 83 | 77 | 72 | 88 | 81 | 76 | 71 | 78 | 73 | 69 | 75 | 71 | 68 | 72 | 69 | 66 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | | | | | | | |
| 3 | 83 | 73 | 66 | 60 | 80 | 72 | 65 | 60 | 69 | 64 | 59 | 67 | 62 | 58 | 64 | 60 | 57 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | | | | | | | |
| 4 | 76 | 65 | 58 | 52 | 74 | 64 | 57 | 52 | 62 | 56 | 51 | 60 | 55 | 50 | 58 | 53 | 50 | 48 | 48 | 48 | 48 | 48 | 48 | 48 | | | | | | | | |
| 5 | 70 | 59 | 51 | 45 | 68 | 58 | 51 | 45 | 56 | 50 | 45 | 54 | 49 | 44 | 53 | 48 | 44 | 42 | 42 | 42 | 42 | 42 | 42 | 42 | 42 | | | | | | | |
| 6 | 65 | 54 | 46 | 40 | 64 | 53 | 45 | 40 | 51 | 45 | 40 | 50 | 44 | 39 | 48 | 43 | 39 | 37 | 37 | 37 | 37 | 37 | 37 | 37 | 37 | | | | | | | |
| 7 | 61 | 49 | 41 | 36 | 59 | 48 | 41 | 36 | 47 | 40 | 36 | 46 | 40 | 35 | 44 | 39 | 35 | 33 | 33 | 33 | 33 | 33 | 33 | 33 | 33 | | | | | | | |
| 8 | 57 | 45 | 38 | 32 | 55 | 44 | 37 | 32 | 43 | 37 | 32 | 42 | 36 | 32 | 41 | 36 | 32 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | | | | | | | |
| 9 | 53 | 42 | 34 | 30 | 52 | 41 | 34 | 29 | 40 | 34 | 29 | 39 | 33 | 29 | 38 | 33 | 29 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | | | | | | | |
| 10 | 50 | 39 | 32 | 27 | 49 | 38 | 31 | 27 | 37 | 31 | 27 | 36 | 31 | 27 | 36 | 30 | 27 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | | | | | | | |

Coefficients of Utilization

| rc | Effective floor cavity reflectance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|------------------------------------|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|-----|----|----|----|----|----|-----|----|----|----|----|----|-----|--|--|--|--|--|----|--|
| | 80% | | | | | | 70% | | | | | | 50% | | | | | | 30% | | | | | | 10% | | | | | | 0% | |
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | 0 | | | | | | | |
| 0 | 107 | 107 | 107 | 107 | 104 | 104 | 104 | 104 | 99 | 99 | 99 | 94 | 94 | 94 | 90 | 90 | 90 | 88 | 88 | 88 | 88 | 88 | 88 | 88 | 88 | | | | | | | |
| 1 | 98 | 93 | 90 | 86 | 95 | 91 | 88 | 84 | 87 | 84 | 81 | 83 | 81 | 78 | 79 | 77 | 76 | 74 | 74 | 74 | 74 | 74 | 74 | 74 | 74 | | | | | | | |
| 2 | 89 | 81 | 75 | 70 | 86 | 79 | 74 | 69 | 76 | 71 | 67 | 73 | 69 | 65 | 69 | 66 | 63 | 61 | 61 | 61 | 61 | 61 | 61 | 61 | 61 | | | | | | | |
| 3 | 81 | 72 | 64 | 58 | 79 | 70 | 63 | 58 | 67 | 61 | 56 | 64 | 59 | 55 | 61 | 57 | 54 | 52 | 52 | 52 | 52 | 52 | 52 | 52 | 52 | | | | | | | |
| 4 | 74 | 63 | 56 | 50 | 72 | 62 | 55 | 49 | 60 | 53 | 48 | 57 | 52 | 47 | 55 | 50 | 46 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | | | | | | | |
| 5 | 68 | 57 | 49 | 43 | 66 | 56 | 48 | 42 | 54 | 47 | 42 | 51 | 46 | 41 | 50 | 45 | 40 | 38 | 38 | 38 | 38 | 38 | 38 | 38 | 38 | | | | | | | |
| 6 | 63 | 51 | 43 | 38 | 61 | 50 | 43 | 37 | 48 | 42 | 37 | 47 | 41 | 36 | 45 | 40 | 36 | 34 | 34 | 34 | 34 | 34 | 34 | 34 | 34 | | | | | | | |
| 7 | 59 | 47 | 39 | 33 | 57 | 46 | 38 | 33 | 44 | 38 | 33 | 43 | 37 | 32 | 41 | 36 | 32 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | | | | | | | |
| 8 | 55 | 43 | 35 | 30 | 53 | 42 | 35 | 30 | 41 | 34 | 29 | 39 | 33 | 29 | 38 | 33 | 29 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | | | | | | | |
| 9 | 51 | 39 | 32 | 27 | 50 | 39 | 32 | 27 | 37 | 31 | 27 | 36 | 31 | 26 | 35 | 30 | 26 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | | | | | | | |
| 10 | 48 | 36 | 29 | 25 | 47 | 36 | 29 | 24 | 35 | 29 | 24 | 34 | 28 | 24 | 33 | 28 | 24 | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 22 | | | | | | | |

Zonal Lumen Summary

| Zone | Lumens | %Lamp | %Fixture |
|-------|--------|-------|----------|
| 0-30 | 3731 | 30.1 | 33.3 |
| 0-40 | 5653 | 45.6 | 50.4 |
| 0-60 | 8940 | 72.1 | 79.7 |
| 0-90 | 11219 | 90.5 | 100.0 |
| 0-180 | 11219 | 90.5 | 100.0 |

Luminance Data

| Angle in Deg | Average 0-Deg cd/sm | Average 45-Deg cd/sm | Average 90-Deg cd/sm |
|--------------|---------------------|----------------------|----------------------|
| 45 | 12681 | 6784 | 5908 |
| 55 | 12082 | 5707 | 6179 |
| 65 | 11021 | 6034 | 7249 |
| 75 | 8934 | 7069 | 7861 |
| 85 | 3647 | 6295 | 5269 |

Zonal Lumen Summary

| Zone | Lumens | %Lamp | %Fixture |
|-------|--------|-------|----------|
| 0-30 | 3999 | 25.8 | 28.5 |
| 0-40 | 6258 | 40.4 | 44.6 |
| 0-60 | 10620 | 68.5 | 75.8 |
| 0-90 | 13640 | 88.0 | 97.3 |
| 0-180 | 14017 | 90.4 | 100.0 |

Luminance Data

| Angle in Deg | Average 0-Deg cd/sm | Average 45-Deg cd/sm | Average 90-Deg cd/sm |
|--------------|---------------------|----------------------|----------------------|
| 45 | 11540 | 8185 | 8149 |
| 55 | 10877 | 7792 | 8547 |
| 65 | 9688 | 8173 | 9468 |
| 75 | 7774 | 8510 | 8927 |
| 85 | 2639 | 4493 | 3590 |

Modular F-Bay Power Supply Option

Cooper Lighting's F-Bay Modular Power Supply option is available for use with all F-Bay products. The modular power supply allows external fixture access for safe and easy servicing. There is no need to remove lamps or reflectors to disconnect fixture power with F-Bay Modular Power Supply. Access to the individual fixture's power supply allows servicing without turning off all the fixtures, disrupting occupants. F-Bay Modular Power Supply is a time-saver in installation – **simply plug & power.**



1. Modular Power Supply Receptacle supplied mounted into fixture Access Plate
2. Modular Power Cord & Plugs in 120, 277, 347, & 480V configurations for easy plug & power into existing supply

No internal fixture access required for installation or disconnecting power

Modular Motion Sensor Option supplied with Mounting Box and Modular Power Supply Receptacle

Code Compliance

- UL/cUL Certified for Make/Break under load (UL2549)
- Meets NEC requirements for ballast disconnect (NEC 410.73G)
- Allows for addition of Occupancy Sensor without hard connections
- Receptacles complete with insulating/dust cap

ORDERING INFORMATION

SAMPLE NUMBER: HBI-532-N-UNV-EB82/PLUS-MP-UPL-U Includes V Hangers for rapid installation⁽⁶⁾

| | | | | | |
|---|---|--|---|--|--|
| Series HBI=High Bay Industrial | Voltage⁽²⁾ UNV=Universal 120/277 Voltage UNC=Universal 347/480 Voltage ⁽⁵⁾ 120V=120 Volt 277V=277 Volt 347V=347 Volt 480V=480 Volt | Ballast Type⁽³⁾ EB8_=T8 Electronic Instant Start. Total Harmonic Distortion < 10% No. of Ballast 2 or 3 EB8_/PLUS=T8 Electronic Instant Start. High Ballast Factor >1.15. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 ER8_=T8 Electronic Program Rapid Start. ^{(9), (11)} Total Harmonic Distortion < 10% No. of Ballast 2 or 3 ER8_/PLUS=T8 Electronic Program Start. ^{(9), (11)} High Ballast Factor >1.15. Total Harmonic Distortion < 10% No. of Ballast 2 or 3 DIM=Consult Factory ⁽⁷⁾ | Options Lamps Installed L8830=T8 Lamp, 85CRI 3000K L8835=T8 Lamp, 85CRI 3500K L8841=T8 Lamp, 85CRI 4100K L8850=T8 Lamp, 85CRI 5000K HL=Add HL at end of lamp for high lumen lamps, T8 only GL=Single Element Fuse GM=Double Element Fuse EL=Emergency Installed ⁽²⁾ | Options MP=Modular Power Receptacle (Used for all Cord or Cord and Plug options) ^{(1), (10)} NUA=No uplight apertures in housing. (Cannot be combined w/UPL) UPL=Uplight Apertures MWS=Modular Wiring System ⁽⁹⁾ MS=360° or 180° Motion Sensor, 120 through 347, or 480V ^{(4), (11)} G2=Gasketed Door (Requires Selection of Lensed Doorframe) SDF=Slotted Doorframe (Requires Selection of Lensed Doorframe) | Packaging U=Unit Pack PALC=Palletize d In Carton PAL=Job Pack Out of Carton |
| No. of Lamps 4=4 Lamps 5=5 Lamps | Lamp Type 32=32WT8 Lamps (48") | Distribution N=Narrow Beam (Standard) M=Medium Beam W=Wide Beam | Shielding Blank=None A=Prismatic Acrylic Lens & Doorframe WG=Wireguard & Doorframe A/WG=Acrylic Lens, Wireguard & Doorframe CL=Clear Acrylic Lens & Doorframe CL/WG=Clear Lens, Wireguard & Doorframe | Accessories (order separately) HB-SPM=Single Monopoint Hanger w/Hub FH-1=Fixture Hook FL-1=Fixture Loop Y-TOGGLE=Y Mounting Toggle, #2 Cable ⁽⁸⁾ (Specify 10' or 30', requires 2 per fixture) HBAYC-CHAIN/SET/U=(2) V-Hook Hangers, 36" Chain Sets w/S-Hooks MC3=3' Modular Power Cord MPC3=3' Modular Power Cord & Plug (Specify Voltage) MC6=6' Modular Power Cord MPC6=6' Modular Power Cord & Plug (Specify Voltage) MMS=360° or 180° Aisle Motion Sensor with Modular Power Receptacle (120-277V) ⁽¹⁾ MDS6=6' Modular Power Cord with MWS 27DS18/2G06MP Connector ⁽¹⁰⁾ SWG=Heavy Duty Wireguard for Field Installation | |

NOTES: ⁽¹⁾Requires use of MC_ or MPC_cord accessories, specify voltage for plugs. ⁽²⁾Voltage must be specified when ordered with plugs or emergency ballasts. ⁽³⁾ER8 and EB8 ballast systems suitable for operation in ambient environments up to 122°F (50°C) in open upright configuration. ⁽⁴⁾When ordering MS option, specify UNV (for 120 or 277V), 347 or 480V. ⁽⁵⁾2/3 lamp ballast configurations in EB8/PLUS only for T8 UNC versions. ⁽⁶⁾Can be used in high abuse applications such as gymnasiums. ⁽⁷⁾Dimming ballast must be specified at time of order. ⁽⁸⁾Two required. ⁽⁹⁾Cannot be combined with Modular Power Receptacle (MP). ⁽¹⁰⁾For MWS with MP, choose MP in fixture logic and then choose MWS accessory such as MDS6. ⁽¹¹⁾Recommend Program Rapid Start Ballast when using MS option.



Quick Ship Ordering Information Sample Number: HBI432-MP-UPL-L5

Quick Ship orders ship in 5 days in order quantities not to exceed 200 pieces. Includes V Hangers for rapid installation⁽⁶⁾

NOTE: Orders received after noon are entered on the following day.

| | | | | | |
|--|---|---|---|---|---|
| Family HBI | Distribution Blank=Narrow Beam W=Wide Beam | Ballast Type Blank=(1) 120/277V 4 Lamp T8 Instant Start Electronic, 1.15 BF PS=(1) 120/277V 4 Lamp T8 Electronic Program Rapid Start, 1.15 BF ⁽⁸⁾ | Power Receptacle Blank=Standard Wiring to Access Plate MP=Modular Power Receptacle ⁽¹⁰⁾ | Uplight Blank=No Uplight UPL=Uplight | Lamping Blank=No Lamps L4=Lamps Installed 85+CRI 4100K ⁽¹¹⁾ L5=Lamps Installed 85+CRI 5000K L5HL=Lamps Installed 85+CRI 5000K, High Lumen |
| Lamp Qty 4=4 Lamps | | | | | |
| Lamp Type 32=32WT8 Lamps (48") | | | | | |

NOTES: ⁽⁸⁾Recommended when utilizing Motion Sensor option. ⁽¹⁰⁾Requires use of Modular cord and plug accessories. ⁽¹¹⁾High lumen (3100 initial) lamps supplied for 4100K.

SHIPPING DATA

| Catalog No. | Wt. |
|-------------|---------|
| HBI-432-UPL | 16 lbs. |
| HBI-532-UPL | 16 lbs. |



Eaton
 1121 Highway 74 South
 Peachtree City, GA 30269
 P: 770-486-4800
 www.eaton.com/lighting

Specifications and dimensions subject to change without notice.

DESCRIPTION

The HBI series is an outstanding solution for high mounting height industrial or retail applications. The HBI optic has been optimized to provide maximum performance from T8 lamps. Optional uplight component is provided to enable excellent ceiling uniformity. HBI's high lumen package allows the benefits of fluorescent to be applied at high mounting heights that were traditionally exclusive to H.I.D. The primary benefits include exceptional color rendering, high system efficacy, 95% lumen maintenance, long lamp life, instant on/instant re-strike, economical dimming, and uniform brightness control. Primary applications include retail, shopping malls, light industrial, gymnasiums and recreational environments.

SPECIFICATION FEATURES

Construction

Full bodied steel housing with integral ballast channel adds strength, rigidity and structural protection for optical assembly.

Electrical

The HBI comes with a standard Class P electronic ballast and twistlock lampholders. UL/cUL listed for high ambient environments up to 55°C (131°F) for all lamps and ballast combinations when used in open upright configurations. Suitable for damp locations. Optional modular power receptacle meets UL2459 and NEC 410.73 and is UL/cUL rated for make and break under load from outside the luminaire to speed maintenance.

Finish

White enamel finish preceded by a multistage cleaning cycle, iron phosphate coating with rust inhibitor to protect against contaminants and oxidation.

Downlight/Uplight Optics

Die formed, segmented optical design optimizes performance across three distributions. Optical choices include a narrow distribution for aisles, medium distribution for assembly and loading areas, or wide distribution for general, open area lighting. An upright option is offered to permit ceiling uniformity and allow for ample lamp and luminaire heat dissipation. Gasketed door frame & lens assembly is optional for more demanding environments.

| | | |
|-------------|--|------|
| Catalog # | | Type |
| Project | | |
| Comments | | Date |
| Prepared by | | |

Options

Integral Occupancy Sensor available and provides from 600 sq. ft. (MS) up to 1250 sq. ft. (MSO) of coverage at a maximum mounting height of 40' using interchangeable lens caps provided.

Mounting

The HBI series is suited for suspension mounting with optional wire hook and chain set or cable mounting. Single monopoint mounting is available with SPM Tong Hanger.

Warranty


When operated in high ambient conditions, the HBI is supported by a 5 yr/55°C and 3 yr/65°C ballast warranty when used with a high power factor ballast in open, upright configurations. To maximize your warranty, the HBI should be ordered with a high power factor ballast in ambient environments that typically exceed 40°C (102°F).




HBI SERIES

4 OR 5 T8 LAMPS


High-Bay Industrial
Fluorescent Luminaire

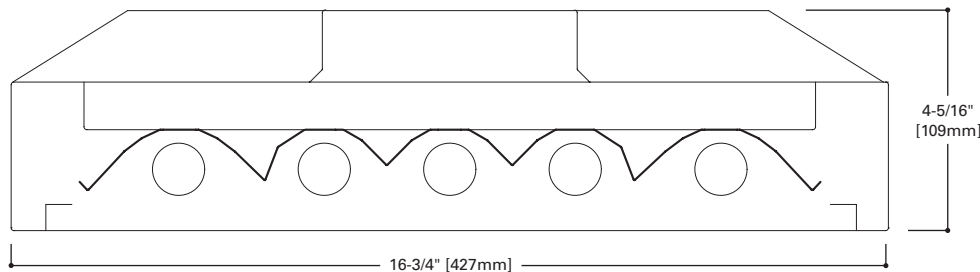

LAMP CONFIGURATIONS

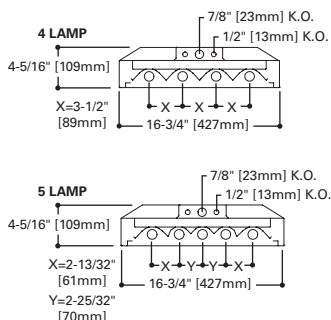

DIMENSION TOP VIEW

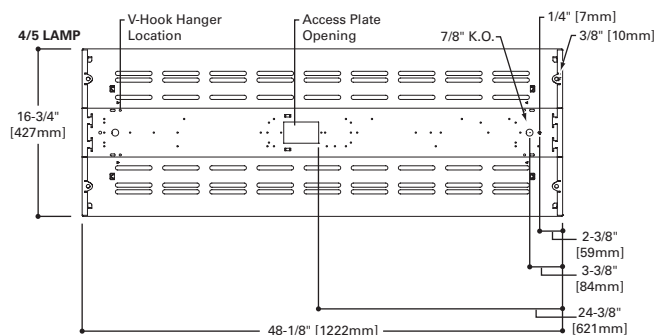

ENERGY DATA

Input Watts:

EB Ballast
 432 (109), 532 (133)

EB/Plus Ballast
 432 (145), 532 (182)

Luminaire Efficacy Rating
LER = FL-83 (Narrow Beam)
 Catalog Number: HBI-432-N

Yearly Cost of 1000 lumens,
 3000 hrs at .08 KWH = \$2.88

*Reference the lamp/ballast data in the
 Technical Section for specific lamp/ballast
 requirements.


**Consult Pre Sales Technical Support.

**LAMPS CONTAIN MERCURY. DISPOSE ACCORDING
 TO LOCAL, STATE OR FEDERAL LAWS**

LINEAR DISCONNECT


Safe and convenient means of
 disconnecting power.

PHOTOMETRICS

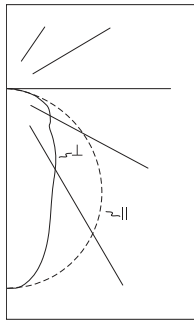

HBI-432-N-UNV-EB81/PLUS
 Electronic Ballasts
 (4) 32W T8 Lamps
 3100 lumens
 Spacing criterion:
 (||) 1.3 x mounting height,
 (⊥) 0.8 x mounting height
 Efficiency 90.5%
 Test Report: HBI432
 LER =FL-83
 Yearly Cost of 1000 lumens, 3000 hrs at .08 KWH = \$2.88

| Candela | | | |
|---------|-------|------|----------|
| Angle | Along | 45° | Across ⊥ |
| 0 | 5703 | 5703 | 5703 |
| 5 | 5674 | 5641 | 5614 |
| 10 | 5603 | 5400 | 5189 |
| 15 | 5488 | 4970 | 4478 |
| 20 | 5318 | 4382 | 3659 |
| 25 | 5102 | 3691 | 3096 |
| 30 | 4842 | 3108 | 2736 |
| 35 | 4540 | 2680 | 2429 |
| 40 | 4192 | 2348 | 2096 |
| 45 | 3808 | 2037 | 1774 |
| 50 | 3391 | 1704 | 1583 |
| 55 | 2943 | 1390 | 1505 |
| 60 | 2465 | 1200 | 1408 |
| 65 | 1978 | 1083 | 1301 |
| 70 | 1478 | 963 | 1082 |
| 75 | 982 | 777 | 864 |
| 80 | 514 | 537 | 545 |
| 85 | 135 | 233 | 195 |
| 90 | 0 | 0 | 0 |

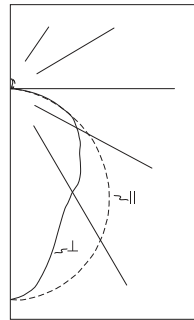

HBI-532-N-UNV-EB82/PLUS-UPL
 Electronic Ballasts
 (5) 32W T8 Lamps
 3100 lumens
 Spacing criterion:
 (||) 1.3 x mounting height,
 (⊥) 0.8 x mounting height
 Efficiency 90.4%
 Test Report: HBI532-UPL
 LER =FL-85
 Yearly Cost of 1000 lumens, 3000 hrs at .08 KWH = \$2.81

| Candela | | | |
|---------|-------|------|----------|
| Angle | Along | 45° | Across ⊥ |
| 0 | 5983 | 5983 | 5983 |
| 5 | 5976 | 5878 | 5795 |
| 10 | 5885 | 5603 | 5309 |
| 15 | 5748 | 5152 | 4681 |
| 20 | 5562 | 4597 | 4103 |
| 25 | 5322 | 4062 | 3697 |
| 30 | 5034 | 3613 | 3450 |
| 35 | 4703 | 3261 | 3317 |
| 40 | 4338 | 2981 | 3085 |
| 45 | 3938 | 2793 | 2781 |
| 50 | 3482 | 2497 | 2575 |
| 55 | 3011 | 2157 | 2366 |
| 60 | 2506 | 1922 | 2147 |
| 65 | 1976 | 1667 | 1931 |
| 70 | 1477 | 1421 | 1479 |
| 75 | 971 | 1063 | 1115 |
| 80 | 494 | 647 | 599 |
| 85 | 111 | 189 | 151 |
| 90 | 0 | 4 | 2 |

Coefficients of Utilization

| rc | Effective floor cavity reflectance | | | | | | | | | | | | | | | | | | | | | | | |
|----|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|----|----|-----|----|----|----|----|----|----|----|
| | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 10% | | | | 0% | | | |
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| 0 | 108 | 108 | 108 | 108 | 105 | 105 | 105 | 105 | 101 | 101 | 101 | 96 | 96 | 96 | 92 | 92 | 92 | 90 | 90 | 90 | 90 | 90 | 90 | 90 |
| 1 | 99 | 94 | 91 | 87 | 96 | 92 | 89 | 86 | 88 | 86 | 83 | 85 | 83 | 80 | 82 | 80 | 78 | 76 | 76 | 76 | 76 | 76 | 76 | 76 |
| 2 | 90 | 83 | 77 | 72 | 88 | 81 | 76 | 71 | 78 | 73 | 69 | 75 | 71 | 68 | 72 | 69 | 66 | 64 | 64 | 64 | 64 | 64 | 64 | 64 |
| 3 | 83 | 73 | 66 | 60 | 80 | 72 | 65 | 60 | 69 | 64 | 59 | 67 | 62 | 58 | 64 | 60 | 57 | 55 | 55 | 55 | 55 | 55 | 55 | 55 |
| 4 | 76 | 65 | 58 | 52 | 74 | 64 | 57 | 52 | 62 | 56 | 51 | 60 | 55 | 50 | 58 | 53 | 50 | 48 | 48 | 48 | 48 | 48 | 48 | 48 |
| 5 | 70 | 59 | 51 | 45 | 68 | 58 | 51 | 45 | 56 | 50 | 45 | 54 | 49 | 44 | 53 | 48 | 44 | 42 | 42 | 42 | 42 | 42 | 42 | 42 |
| 6 | 65 | 54 | 46 | 40 | 64 | 53 | 45 | 40 | 51 | 45 | 40 | 50 | 44 | 39 | 48 | 43 | 39 | 37 | 37 | 37 | 37 | 37 | 37 | 37 |
| 7 | 61 | 49 | 41 | 36 | 59 | 48 | 41 | 36 | 47 | 40 | 36 | 46 | 40 | 35 | 44 | 39 | 35 | 33 | 33 | 33 | 33 | 33 | 33 | 33 |
| 8 | 57 | 45 | 38 | 32 | 55 | 44 | 37 | 32 | 43 | 37 | 32 | 42 | 36 | 32 | 41 | 36 | 32 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| 9 | 53 | 42 | 34 | 30 | 52 | 41 | 34 | 29 | 40 | 34 | 29 | 39 | 33 | 29 | 38 | 33 | 29 | 27 | 27 | 27 | 27 | 27 | 27 | 27 |
| 10 | 50 | 39 | 32 | 27 | 49 | 38 | 31 | 27 | 37 | 31 | 27 | 36 | 31 | 27 | 36 | 30 | 27 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |

Coefficients of Utilization

| rc | Effective floor cavity reflectance | | | | | | | | | | | | | | | | | | | | | | | |
|----|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|----|----|----|-----|----|----|----|----|----|----|----|
| | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 10% | | | | 0% | | | |
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| 0 | 107 | 107 | 107 | 107 | 104 | 104 | 104 | 104 | 99 | 99 | 99 | 94 | 94 | 94 | 90 | 90 | 90 | 88 | 88 | 88 | 88 | 88 | 88 | 88 |
| 1 | 98 | 93 | 90 | 86 | 95 | 91 | 88 | 84 | 87 | 84 | 81 | 83 | 81 | 78 | 79 | 77 | 76 | 74 | 74 | 74 | 74 | 74 | 74 | 74 |
| 2 | 89 | 81 | 75 | 70 | 86 | 79 | 74 | 69 | 76 | 71 | 67 | 73 | 69 | 65 | 69 | 66 | 63 | 61 | 61 | 61 | 61 | 61 | 61 | 61 |
| 3 | 81 | 72 | 64 | 58 | 79 | 70 | 63 | 58 | 67 | 61 | 56 | 64 | 59 | 55 | 61 | 57 | 54 | 52 | 52 | 52 | 52 | 52 | 52 | 52 |
| 4 | 74 | 63 | 56 | 50 | 72 | 62 | 55 | 49 | 60 | 53 | 48 | 57 | 52 | 47 | 55 | 50 | 46 | 44 | 44 | 44 | 44 | 44 | 44 | 44 |
| 5 | 68 | 57 | 49 | 43 | 66 | 56 | 48 | 42 | 54 | 47 | 42 | 51 | 46 | 41 | 50 | 45 | 40 | 38 | 38 | 38 | 38 | 38 | 38 | 38 |
| 6 | 63 | 51 | 43 | 38 | 61 | 50 | 43 | 37 | 48 | 42 | 37 | 47 | 41 | 36 | 45 | 40 | 36 | 34 | 34 | 34 | 34 | 34 | 34 | 34 |
| 7 | 59 | 47 | 39 | 33 | 57 | 46 | 38 | 33 | 44 | 38 | 33 | 43 | 37 | 32 | 41 | 36 | 32 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| 8 | 55 | 43 | 35 | 30 | 53 | 42 | 35 | 30 | 41 | 34 | 29 | 39 | 33 | 29 | 38 | 33 | 29 | 27 | 27 | 27 | 27 | 27 | 27 | 27 |
| 9 | 51 | 39 | 32 | 27 | 50 | 39 | 32 | 27 | 37 | 31 | 27 | 36 | 31 | 26 | 35 | 30 | 26 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| 10 | 48 | 36 | 29 | 25 | 47 | 36 | 29 | 24 | 35 | 29 | 24 | 34 | 28 | 24 | 33 | 28 | 24 | 22 | 22 | 22 | 22 | 22 | 22 | 22 |

Zonal Lumen Summary

| Zone | Lumens | %Lamp | %Fixture |
|-------|--------|-------|----------|
| 0-30 | 3731 | 30.1 | 33.3 |
| 0-40 | 5653 | 45.6 | 50.4 |
| 0-60 | 8940 | 72.1 | 79.7 |
| 0-90 | 11219 | 90.5 | 100.0 |
| 0-180 | 11219 | 90.5 | 100.0 |

Luminance Data

| Angle in Deg | Average 0-Deg cd/sm | Average 45-Deg cd/sm | Average 90-Deg cd/sm |
|--------------|---------------------|----------------------|----------------------|
| 45 | 12681 | 6784 | 5908 |
| 55 | 12082 | 5707 | 6179 |
| 65 | 11021 | 6034 | 7249 |
| 75 | 8934 | 7069 | 7861 |
| 85 | 3647 | 6295 | 5269 |

Zonal Lumen Summary

| Zone | Lumens | %Lamp | %Fixture |
|-------|--------|-------|----------|
| 0-30 | 3999 | 25.8 | 28.5 |
| 0-40 | 6258 | 40.4 | 44.6 |
| 0-60 | 10620 | 68.5 | 75.8 |
| 0-90 | 13640 | 88.0 | 97.3 |
| 0-180 | 14017 | 90.4 | 100.0 |

Luminance Data

| Angle in Deg | Average 0-Deg cd/sm | Average 45-Deg cd/sm | Average 90-Deg cd/sm |
|--------------|---------------------|----------------------|----------------------|
| 45 | 11540 | 8185 | 8149 |
| 55 | 10877 | 7792 | 8547 |
| 65 | 9688 | 8173 | 9468 |
| 75 | 7774 | 8510 | 8927 |
| 85 | 2639 | 4493 | 3590 |

Modular F-Bay Power Supply Option

Cooper Lighting's F-Bay Modular Power Supply option is available for use with all F-Bay products. The modular power supply allows external fixture access for safe and easy servicing. There is no need to remove lamps or reflectors to disconnect fixture power with F-Bay Modular Power Supply. Access to the individual fixture's power supply allows servicing without turning off all the fixtures, disrupting occupants. F-Bay Modular Power Supply is a time-saver in installation – **simply plug & power.**



1. Modular Power Supply Receptacle supplied mounted into fixture Access Plate
2. Modular Power Cord & Plugs in 120, 277, 347, & 480V configurations for easy plug & power into existing supply

No internal fixture access required for installation or disconnecting power

Modular Motion Sensor Option supplied with Mounting Box and Modular Power Supply Receptacle

Code Compliance

- UL/cUL Certified for Make/Break under load (UL2549)
- Meets NEC requirements for ballast disconnect (NEC 410.73G)
- Allows for addition of Occupancy Sensor without hard connections
- Receptacles complete with insulating/dust cap

ORDERING INFORMATION

SAMPLE NUMBER: HBI-532-N-UNV-EB82/PLUS-MP-UPL-U Includes V Hangers for rapid installation⁽⁶⁾

| | | | | | |
|---|---|--|---|--|--|
| Series HBI=High Bay Industrial | Voltage⁽²⁾ UNV=Universal 120/277 Voltage UNC=Universal 347/480 Voltage ⁽⁵⁾ 120V=120 Volt 277V=277 Volt 347V=347 Volt 480V=480 Volt | Ballast Type⁽³⁾ EB8_=T8 Electronic Instant Start. Total Harmonic Distortion < 10% No. of Ballast 2 or 3 EB8_/PLUS=T8 Electronic Instant Start. High Ballast Factor >1.15. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 ER8_=T8 Electronic Program Rapid Start. ^{(9), (11)} Total Harmonic Distortion < 10% No. of Ballast 2 or 3 ER8_/PLUS=T8 Electronic Program Start. ^{(9), (11)} High Ballast Factor >1.15. Total Harmonic Distortion < 10% No. of Ballast 2 or 3 DIM=Consult Factory ⁽⁷⁾ | Options Lamps Installed L8830=T8 Lamp, 85CRI 3000K L8835=T8 Lamp, 85CRI 3500K L8841=T8 Lamp, 85CRI 4100K L8850=T8 Lamp, 85CRI 5000K HL=Add HL at end of lamp for high lumen lamps, T8 only GL=Single Element Fuse GM=Double Element Fuse EL=Emergency Installed ⁽²⁾ | Options MP=Modular Power Receptacle (Used for all Cord or Cord and Plug options) ^{(1), (10)} NUA=No uplight apertures in housing. (Cannot be combined w/UPL) UPL=Uplight Apertures MWS=Modular Wiring System ⁽⁸⁾ MS=360° or 180° Motion Sensor, 120 through 347, or 480V ^{(4), (11)} G2=Gasketed Door (Requires Selection of Lensed Doorframe) SDF=Slotted Doorframe (Requires Selection of Lensed Doorframe) | Packaging U=Unit Pack PALC=Palletize d In Carton PAL=Job Pack Out of Carton |
| No. of Lamps 4=4 Lamps 5=5 Lamps | Lamp Type 32=32WT8 Lamps (48") | Distribution N=Narrow Beam (Standard) M=Medium Beam W=Wide Beam | Shielding Blank=None A=Prismatic Acrylic Lens & Doorframe WG=Wireguard & Doorframe A/WG=Acrylic Lens, Wireguard & Doorframe CL=Clear Acrylic Lens & Doorframe CL/WG=Clear Lens, Wireguard & Doorframe | Accessories (order separately) HB-SPM=Single Monopoint Hanger w/Hub FH-1=Fixture Hook FL-1=Fixture Loop Y-TOGGLE=Y Mounting Toggle, #2 Cable ⁽⁸⁾ (Specify 10' or 30', requires 2 per fixture) HBAYC-CHAIN/SET/U=(2) V-Hook Hangers, 36" Chain Sets w/S-Hooks MC3=3' Modular Power Cord MPC3=3' Modular Power Cord & Plug (Specify Voltage) MC6=6' Modular Power Cord MPC6=6' Modular Power Cord & Plug (Specify Voltage) MMS=360° or 180° Aisle Motion Sensor with Modular Power Receptacle (120-277V) ⁽¹⁾ MDS6=6' Modular Power Cord with MWS 27DS18/2G06MP Connector ⁽¹⁰⁾ SWG=Heavy Duty Wireguard for Field Installation | |

NOTES: ⁽¹⁾Requires use of MC_ or MPC_cord accessories, specify voltage for plugs. ⁽²⁾Voltage must be specified when ordered with plugs or emergency ballasts. ⁽³⁾ER8 and EB8 ballast systems suitable for operation in ambient environments up to 122°F (50°C) in open upright configuration. ⁽⁴⁾When ordering MS option, specify UNV (for 120 or 277V), 347 or 480V. ⁽⁵⁾2/3 lamp ballast configurations in EB8/PLUS only for T8 UNC versions. ⁽⁶⁾Can be used in high abuse applications such as gymnasiums. ⁽⁷⁾Dimming ballast must be specified at time of order. ⁽⁸⁾Two required. ⁽⁹⁾Cannot be combined with Modular Power Receptacle (MP). ⁽¹⁰⁾For MWS with MP, choose MP in fixture logic and then choose MWS accessory such as MDS6. ⁽¹¹⁾Recommend Program Rapid Start Ballast when using MS option.



Quick Ship Ordering Information Sample Number: HBI432-MP-UPL-L5

Quick Ship orders ship in 5 days in order quantities not to exceed 200 pieces. Includes V Hangers for rapid installation⁽⁶⁾
 NOTE: Orders received after noon are entered on the following day.

| | | | | | |
|--|---|---|---|---|---|
| Family HBI | Distribution Blank=Narrow Beam W=Wide Beam | Ballast Type Blank=(1) 120/277V 4 Lamp T8 Instant Start Electronic, 1.15 BF PS=(1) 120/277V 4 Lamp T8 Electronic Program Rapid Start, 1.15 BF ⁽⁸⁾ | Power Receptacle Blank=Standard Wiring to Access Plate MP=Modular Power Receptacle ⁽¹⁰⁾ | Uplight Blank=No Uplight UPL=Uplight | Lamping Blank=No Lamps L4=Lamps Installed 85+CRI 4100K ⁽¹¹⁾ L5=Lamps Installed 85+CRI 5000K L5HL=Lamps Installed 85+CRI 5000K, High Lumen |
| Lamp Qty 4=4 Lamps | | | | | |
| Lamp Type 32=32WT8 Lamps (48") | | | | | |

NOTES: ⁽⁸⁾Recommended when utilizing Motion Sensor option. ⁽¹⁰⁾Requires use of Modular cord and plug accessories. ⁽¹¹⁾High lumen (3100 initial) lamps supplied for 4100K.

SHIPPING DATA

| Catalog No. | Wt. |
|-------------|---------|
| HBI-432-UPL | 16 lbs. |
| HBI-532-UPL | 16 lbs. |



Eaton
 1121 Highway 74 South
 Peachtree City, GA 30269
 P: 770-486-4800
 www.eaton.com/lighting

Specifications and dimensions subject to change without notice.