

Concrete/Masonry Boxes and Accessories

Bars for Hanging Ceiling Boxes

| CAT. NO. | LENGTH (IN.) | STD. CTN. |
|----------|--------------|-----------|
| HBB 18 | 18 | 40 |
| HBB-24 | 24 | 40 |
| HBB-30 | 30 | 40 |




Two bars required for each box.

Concrete Box Covers

| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|--|-----------|
| 911 | Flat — 4" octagon Two 1/2" KOs and two 3/4" KOs with 3/8" fixture stud* | 25 |


Fits any Steel City® concrete box.



911

Concrete Box Cover Plate

- Thread size: 3/8"-18 NPS

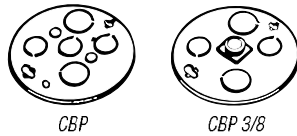

CBP

CBP 3/8

| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|---|-----------|
| CBP | No Stud; 3/2" and 2 3/4" KOs | 25 |
| CBP 3/8 | With 3/8" fixture stud; 2 1/2" and 3/4" KOs | 25 |

Concrete Box Adapter




CBA

| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|---|-----------|
| CBA | For quick mounting and alignment of 4" octagon extension ring on concrete box or hung ceiling box | 25 |


4" Octagon Concrete Boxes

| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | KNOCKOUTS | STD. CTN. |
|-------------------------|-------------|------------------|------------------------|-----------|
| <i>With Conduit KOs</i> | | | | |
| 54531 1/2 3/4 | 2 | 23.0 | 1/2" & 3/4" single row | 25 |
| 54541 1/2 3/4 | 2 1/2 | 29.0 | 1/2" & 3/4" single row | 25 |
| 54551 1/2 & 3/4 | 3 | 35.0 | 1/2" & 3/4" single row | 20 |
| 54551-3/4 & 1 | 3 | 35.0 | 3/4" & 1" single row | 20 |
| 54561 1/2 | 3 1/2 | 41.0 | 1/2" double row | 20 |
| 54561-1/2 & 3/4 | 3 1/2 | 41.0 | 1/2" & 3/4" double row | 20 |
| 54561-3/4 & 1 | 3 1/2 | 41.0 | 3/4" & 1" double row | 20 |
| 54571 1/2 3/4 | 4 | 47.0 | 1/2" & 3/4" double row | 10 |
| 54571-3/4 & 1 | 4 | 47.0 | 3/4" & 1" double row | 10 |
| 54581 1/2 & 3/4 | 5 | 58.0 | 1/2" & 3/4" double row | 10 |
| 54591 1/2 & 3/4 | 6 | 70.0 | 1/2" & 3/4" three rows | 10 |

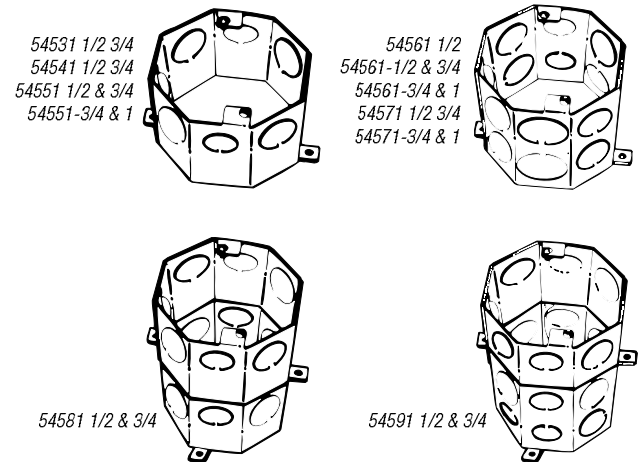

4" Octagon Hanging Ceiling Boxes

| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | KNOCKOUTS | STD. CTN. |
|-------------------------|-------------|------------------|------------------------|-----------|
| <i>With Conduit KOs</i> | | | | |
| H-54561-1/2 & 3/4 | 3 1/2 | 41.0 | 1/2" & 3/4" double row | 20 |
| H-54561-3/4 | 3 1/2 | 41.0 | 3/4" double row | 20 |

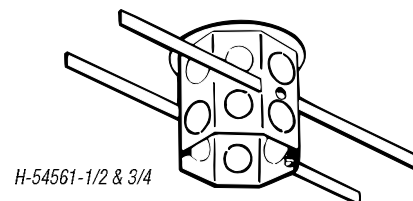

H-54561-1/2 & 3/4

Concrete/Masonry Boxes and Accessories

Gangable Masonry Boxes




ECCENTRIC KNOCKOUTS 1/2" & 3/4"


| CAT. NO. | DEPTH (IN.) | HEIGHT (IN.) | LENGTH (IN.) | CU. IN. CAPACITY | EA. SIDE | EA. END | STD. BOTTOM | STD. CTN. |
|-----------------------------------|-------------|--------------|--------------|------------------|----------|---------|-------------|-----------|
| With Eccentric Conduit KOs | | | | | | | | |
| GW 125 G* | 2½ | 3¼ | 1¼ | 15.0 | 2 | 2 | 2 | 20 |
| GW 225 G* | 2½ | 3¼ | 3¼ | 31.6 | 2 | 4 | 4 | 10 |
| GW 325 G* | 2½ | 3¼ | 5¼ | 47.4 | 2 | 6 | 6 | 5 |
| GW 425 G | 2½ | 3¼ | 7¼ | 64.0 | 2 | 8 | 8 | 5 |
| GW 525 G | 2½ | 3¼ | 9¼ | 79.0 | 2 | 10 | 10 | 5 |
| GW-625-G* | 2½ | 3¼ | 11 | 94.8 | 2 | 12 | 12 | 1 |
| GW 135 G* | 3½ | 3¼ | 1¼ | 22.0 | 4 | 2 | 2 | 20 |
| GW 235 G* | 3½ | 3¼ | 3¼ | 46.9 | 4 | 4 | 4 | 10 |
| GW 335 G | 3½ | 3¼ | 5¼ | 71.0 | 4 | 6 | 6 | 10 |
| GW 435 G* | 3½ | 3¼ | 7¼ | 93.5 | 4 | 8 | 8 | 5 |
| GW-535-G | 3½ | 3¼ | 9¼ | 111.7 | 4 | 10 | 10 | 5 |
| GW-635-G | 3½ | 3¼ | 11 | 134.0 | 4 | 12 | 12 | 1 |

* Per NEC®, suitable for use without a bonding jumper in circuits above or below 250 volts.

† 4-, 5- and 6-gang supplied with partitions.

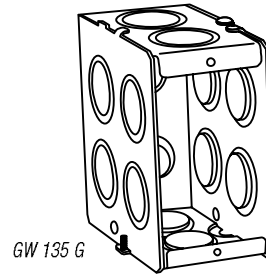

GW 135 G

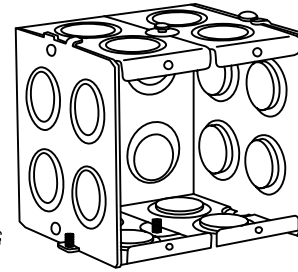

GW 235 G


Masonry Box Partitions



| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|---|-----------|
| PGW-25-G | Non-metallic partition for 2½"-deep steel tile wall boxes | 25 |
| PGW-35-G | Non-metallic partition for 3½"-deep steel tile wall boxes | 25 |




PGW-25-G




PGW-35-G


Shallow Masonry Boxes




1-MBS




2-MBS



3-MBS



4-MBS




MBPS


| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | DESCRIPTION | STD. CTN. |
|----------|-------------|------------------|--|-----------|
| 1-MBS | 2½ | 16.5 | A one-gang masonry box, 2½" deep x 3¼" long x 1¼" wide Six ½" and two ¾" concentric KOs. Two in each side and one in each end. Uses Steel City® 100 cover | 10 |
| 2-MBS | 2½ | 33.0 | A two-gang masonry box, 2½" deep x 3¼" long x 3¼" wide Eight ½" and two ¾" concentric KOs. Two in each side and two in each end. Uses Steel City® SB-2 cover | 10 |
| 3-MBS | 2½ | 49.0 | A three-gang masonry box, 2½" deep x 3¼" long x 5½" wide Ten ½" and ¾" concentric KOs. Three in each side and two in each end. Uses Steel City® SB-3 cover | 5 |
| 4-MBS | 2½ | 67.0 | A four-gang masonry box, 2½" deep x 3¼" long x 7¾" wide Twelve ½" and ¾" concentric KOs. Four in each side and two in each end. Uses Steel City® SB-4 cover | 5 |
| MBPS | 2½ | — | Masonry Box Partition, 2½" deep x 3¼" wide A low-voltage partition drilled and tapped for mounting. Furnished with two 8/32 screws. For use with 2-MBS, 3-MBS or 4-MBS boxes | 50 |

Concrete/Masonry Boxes and Accessories


Deep Masonry Boxes




1-MB




2-MB



3-MB



4-MB



MBP

| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | DESCRIPTION | STD. CTN. |
|----------|-------------|------------------|---|-----------|
| 1-MB | 3½ | 23.3 | One-Gang Masonry Box, 3½" deep x 3¼" long x 1½" wide Eight ½" and ¾" concentric KOs. Two in each side and two in each end. Uses Steel City® 100 series covers | 10 |
| 2-MB | 3½ | 46.8 | Two-Gang Masonry Box, 3½" deep x 3¼" long x 3¼" wide Twelve ½" and ¾" concentric KOs. Four in each of two sides and two in each end. Uses Steel City® SB-2 cover | 10 |
| 3-MB | 3½ | 69.5 | Three-Gang Box, 3½" deep x 3¼" long x 5½" wide Sixteen ½" and ¾" concentric KOs. Six in each of two sides and two in each end. Uses Steel City® SB-3 cover | 5 |
| 4-MB | 3½ | 92.0 | Four-Gang Masonry Box, 3½" deep x 3¼" long x 7½" wide Twenty ½" and ¾" concentric KOs. Eight in each of two sides and two in each end. Uses Steel City® SB-4 cover | 5 |
| MBP | 3½ | — | Masonry Box Partition, 3½" deep x 3¼" wide A low-voltage partition drilled and tapped for mounting. Furnished with two 8/32 screws. For use with 2-MB, 3-MB or 4-MB boxes | 50 |

1" KO Masonry Box


| CAT. NO. | LENGTH (IN.) | CU. IN. CAPACITY | 1" KNOCKOUTS | | | STD. CTN. |
|---------------------------------|--------------|------------------|--------------|---------|--------|-----------|
| | | | EA. SIDE | EA. END | BOTTOM | |
| <i>Non-Gangable Single Gang</i> | | | | | | |
| GW 135 NG-1 | 1½ | 22 | 2 | 1 | 2 | 10 |

GW 135 NG-1



Thru-Wall Boxes for Concrete Block


| CAT. NO. | WIDTH (IN.) | HEIGHT (IN.) | DEPTH (IN.) | CU. IN. CAPACITY | KNOCKOUTS (IN.) | | STD. CTN. |
|------------------------------------|-------------|--------------|-------------|------------------|------------------|-----------------|-----------|
| | | | | | EA. SIDE CONDUIT | EA. END CONDUIT | |
| <i>With Concentric Conduit KOs</i> | | | | | | | |
| CBTW 4 | 2½ | 3½ | 3½ | 24.0 | (2) ½-¾ | (1) ½-¾ | 10 |
| CBTW 6 | 2½ | 3½ | 5½ | 38.0 | (4) ½-¾ | (2) ½-¾ | 10 |
| CBTW 8 | 2½ | 3½ | 7½ | 52.3 | (6) ½-¾ | (3) ½-¾ | 10 |



CBTW 4



CBTW 6

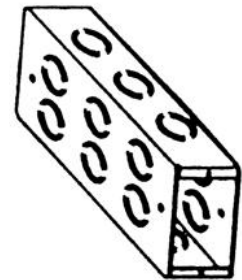


CBTW 8

Welded Thru Boxes

| CAT. NO. | CU. IN. CAPACITY | DESCRIPTION | STD. CTN. |
|----------|------------------|--|-----------|
| 4-DWS | 25.5 | 3½" deep x 4" long x 2½" wide One ½" KO and one ¾" KO both on top, one ½" KO bottom side and one ½" KO on side opposite two flat brackets* | 25 |

*Uses Steel City® and 100 series covers.

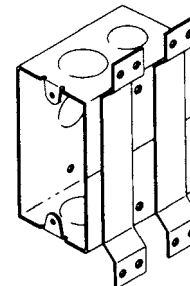

4-DWS

Concrete/Masonry Boxes and Accessories

Bars for Hanging Ceiling Boxes

| CAT. NO. | LENGTH (IN.) | STD. CTN. |
|----------|--------------|-----------|
| HBB 18 | 18 | 40 |
| HBB-24 | 24 | 40 |
| HBB-30 | 30 | 40 |




Two bars required for each box.

Concrete Box Covers

| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|--|-----------|
| 911 | Flat — 4" octagon Two 1/2" KOs and two 3/4" KOs with 3/8" fixture stud* | 25 |


Fits any Steel City® concrete box.



911

Concrete Box Cover Plate

- Thread size: 3/8"-18 NPS

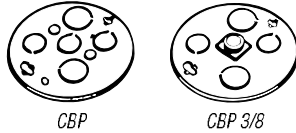

| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|---|-----------|
| CBP | No Stud; 3/2" and 2 3/4" KOs | 25 |
| CBP 3/8 | With 3/8" fixture stud; 2 1/2" and 3/4" KOs | 25 |

Concrete Box Adapter




CBA

| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|---|-----------|
| CBA | For quick mounting and alignment of 4" octagon extension ring on concrete box or hung ceiling box | 25 |


4" Octagon Concrete Boxes

| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | KNOCKOUTS | STD. CTN. |
|-------------------------|-------------|------------------|------------------------|-----------|
| <i>With Conduit KOs</i> | | | | |
| 54531 1/2 3/4 | 2 | 23.0 | 1/2" & 3/4" single row | 25 |
| 54541 1/2 3/4 | 2 1/2 | 29.0 | 1/2" & 3/4" single row | 25 |
| 54551 1/2 & 3/4 | 3 | 35.0 | 1/2" & 3/4" single row | 20 |
| 54551-3/4 & 1 | 3 | 35.0 | 3/4" & 1" single row | 20 |
| 54561 1/2 | 3 1/2 | 41.0 | 1/2" double row | 20 |
| 54561-1/2 & 3/4 | 3 1/2 | 41.0 | 1/2" & 3/4" double row | 20 |
| 54561-3/4 & 1 | 3 1/2 | 41.0 | 3/4" & 1" double row | 20 |
| 54571 1/2 3/4 | 4 | 47.0 | 1/2" & 3/4" double row | 10 |
| 54571-3/4 & 1 | 4 | 47.0 | 3/4" & 1" double row | 10 |
| 54581 1/2 & 3/4 | 5 | 58.0 | 1/2" & 3/4" double row | 10 |
| 54591 1/2 & 3/4 | 6 | 70.0 | 1/2" & 3/4" three rows | 10 |

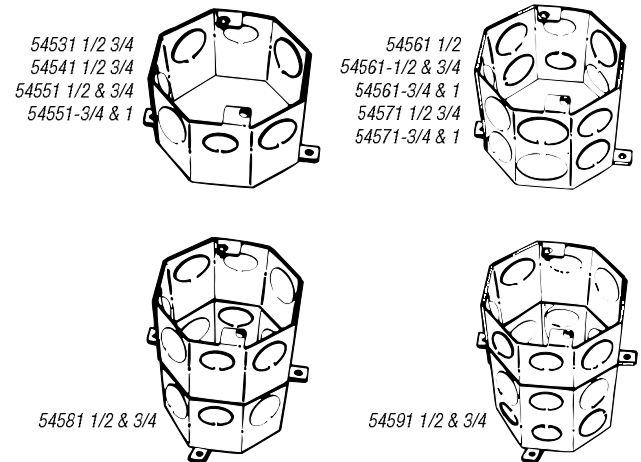

4" Octagon Hanging Ceiling Boxes

| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | KNOCKOUTS | STD. CTN. |
|-------------------------|-------------|------------------|------------------------|-----------|
| <i>With Conduit KOs</i> | | | | |
| H-54561-1/2 & 3/4 | 3 1/2 | 41.0 | 1/2" & 3/4" double row | 20 |
| H-54561-3/4 | 3 1/2 | 41.0 | 3/4" double row | 20 |

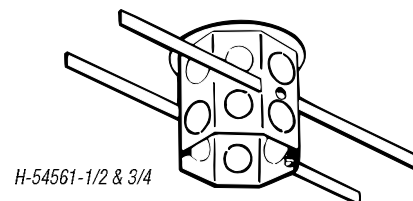

H-54561-1/2 & 3/4

Concrete/Masonry Boxes and Accessories

Gangable Masonry Boxes




ECCENTRIC KNOCKOUTS 1/2" & 3/4"


| CAT. NO. | DEPTH (IN.) | HEIGHT (IN.) | LENGTH (IN.) | CU. IN. CAPACITY | EA. SIDE | EA. END | STD. BOTTOM | STD. CTN. |
|-----------------------------------|-------------|--------------|--------------|------------------|----------|---------|-------------|-----------|
| With Eccentric Conduit KOs | | | | | | | | |
| GW 125 G* | 2½ | 3¼ | 1¼ | 15.0 | 2 | 2 | 2 | 20 |
| GW 225 G* | 2½ | 3¼ | 3¼ | 31.6 | 2 | 4 | 4 | 10 |
| GW 325 G* | 2½ | 3¼ | 5¼ | 47.4 | 2 | 6 | 6 | 5 |
| GW 425 G | 2½ | 3¼ | 7¼ | 64.0 | 2 | 8 | 8 | 5 |
| GW 525 G | 2½ | 3¼ | 9¼ | 79.0 | 2 | 10 | 10 | 5 |
| GW-625-G* | 2½ | 3¼ | 11 | 94.8 | 2 | 12 | 12 | 1 |
| GW 135 G* | 3½ | 3¼ | 1¼ | 22.0 | 4 | 2 | 2 | 20 |
| GW 235 G* | 3½ | 3¼ | 3¼ | 46.9 | 4 | 4 | 4 | 10 |
| GW 335 G | 3½ | 3¼ | 5¼ | 71.0 | 4 | 6 | 6 | 10 |
| GW 435 G* | 3½ | 3¼ | 7¼ | 93.5 | 4 | 8 | 8 | 5 |
| GW-535-G | 3½ | 3¼ | 9¼ | 111.7 | 4 | 10 | 10 | 5 |
| GW-635-G | 3½ | 3¼ | 11 | 134.0 | 4 | 12 | 12 | 1 |

* Per NEC®, suitable for use without a bonding jumper in circuits above or below 250 volts.

† 4-, 5- and 6-gang supplied with partitions.

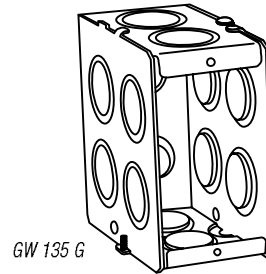

GW 135 G

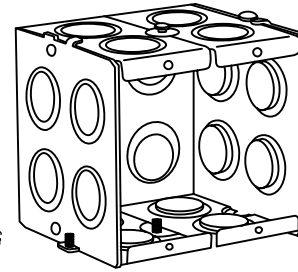

GW 235 G


Masonry Box Partitions



| CAT. NO. | DESCRIPTION | STD. CTN. |
|----------|---|-----------|
| PGW-25-G | Non-metallic partition for 2½"-deep steel tile wall boxes | 25 |
| PGW-35-G | Non-metallic partition for 3½"-deep steel tile wall boxes | 25 |




PGW-25-G




PGW-35-G


Shallow Masonry Boxes




1-MBS




2-MBS



3-MBS



4-MBS




MBPS


| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | DESCRIPTION | STD. CTN. |
|----------|-------------|------------------|--|-----------|
| 1-MBS | 2½ | 16.5 | A one-gang masonry box, 2½" deep x 3¼" long x 1¼" wide Six ½" and two ¾" concentric KOs. Two in each side and one in each end. Uses Steel City® 100 cover | 10 |
| 2-MBS | 2½ | 33.0 | A two-gang masonry box, 2½" deep x 3¼" long x 3¼" wide Eight ½" and two ¾" concentric KOs. Two in each side and two in each end. Uses Steel City® SB-2 cover | 10 |
| 3-MBS | 2½ | 49.0 | A three-gang masonry box, 2½" deep x 3¼" long x 5½" wide Ten ½" and ¾" concentric KOs. Three in each side and two in each end. Uses Steel City® SB-3 cover | 5 |
| 4-MBS | 2½ | 67.0 | A four-gang masonry box, 2½" deep x 3¼" long x 7¾" wide Twelve ½" and ¾" concentric KOs. Four in each side and two in each end. Uses Steel City® SB-4 cover | 5 |
| MBPS | 2½ | — | Masonry Box Partition, 2½" deep x 3¼" wide A low-voltage partition drilled and tapped for mounting. Furnished with two 8/32 screws. For use with 2-MBS, 3-MBS or 4-MBS boxes | 50 |

Concrete/Masonry Boxes and Accessories


Deep Masonry Boxes




1-MB




2-MB



3-MB



4-MB



MBP

| CAT. NO. | DEPTH (IN.) | CU. IN. CAPACITY | DESCRIPTION | STD. CTN. |
|----------|-------------|------------------|---|-----------|
| 1-MB | 3½ | 23.3 | One-Gang Masonry Box, 3½" deep x 3¼" long x 1½" wide Eight ½" and ¾" concentric KOs. Two in each side and two in each end. Uses Steel City® 100 series covers | 10 |
| 2-MB | 3½ | 46.8 | Two-Gang Masonry Box, 3½" deep x 3¼" long x 3¼" wide Twelve ½" and ¾" concentric KOs. Four in each of two sides and two in each end. Uses Steel City® SB-2 cover | 10 |
| 3-MB | 3½ | 69.5 | Three-Gang Box, 3½" deep x 3¼" long x 5½" wide Sixteen ½" and ¾" concentric KOs. Six in each of two sides and two in each end. Uses Steel City® SB-3 cover | 5 |
| 4-MB | 3½ | 92.0 | Four-Gang Masonry Box, 3½" deep x 3¼" long x 7½" wide Twenty ½" and ¾" concentric KOs. Eight in each of two sides and two in each end. Uses Steel City® SB-4 cover | 5 |
| MBP | 3½ | — | Masonry Box Partition, 3½" deep x 3¼" wide A low-voltage partition drilled and tapped for mounting. Furnished with two 8/32 screws. For use with 2-MB, 3-MB or 4-MB boxes | 50 |

1" KO Masonry Box


| CAT. NO. | LENGTH (IN.) | CU. IN. CAPACITY | 1" KNOCKOUTS | | | STD. CTN. |
|---------------------------------|--------------|------------------|--------------|---------|--------|-----------|
| | | | EA. SIDE | EA. END | BOTTOM | |
| <i>Non-Gangable Single Gang</i> | | | | | | |
| GW 135 NG-1 | 1½ | 22 | 2 | 1 | 2 | 10 |

GW 135 NG-1



Thru-Wall Boxes for Concrete Block


| CAT. NO. | WIDTH (IN.) | HEIGHT (IN.) | DEPTH (IN.) | CU. IN. CAPACITY | KNOCKOUTS (IN.) | | STD. CTN. |
|------------------------------------|-------------|--------------|-------------|------------------|------------------|-----------------|-----------|
| | | | | | EA. SIDE CONDUIT | EA. END CONDUIT | |
| <i>With Concentric Conduit KOs</i> | | | | | | | |
| CBTW 4 | 2½ | 3½ | 3½ | 24.0 | (2) ½-¾ | (1) ½-¾ | 10 |
| CBTW 6 | 2½ | 3½ | 5½ | 38.0 | (4) ½-¾ | (2) ½-¾ | 10 |
| CBTW 8 | 2½ | 3½ | 7½ | 52.3 | (6) ½-¾ | (3) ½-¾ | 10 |



CBTW 4



CBTW 6

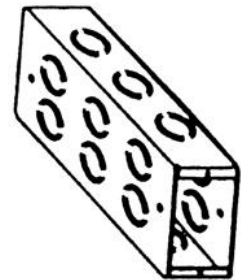


CBTW 8

Welded Thru Boxes

| CAT. NO. | CU. IN. CAPACITY | DESCRIPTION | STD. CTN. |
|----------|------------------|--|-----------|
| 4-DWS | 25.5 | 3½" deep x 4" long x 2½" wide One ½" KO and one ¾" KO both on top, one ½" KO bottom side and one ½" KO on side opposite two flat brackets* | 25 |

*Uses Steel City® and 100 series covers.

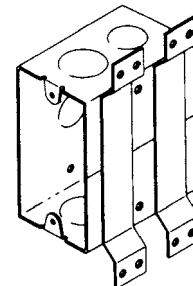

4-DWS