


# QT Series™ — Fans

**Broan QT Series™ Bath Fans.** A bath fan needn't call attention to itself, especially when you don't want it to overpower the design of your bath or powder room. More important, it shouldn't call attention to itself when it's working. So we developed the QT Series™ to provide very relaxing ventilation. With an energy efficient option, it simply does its job quietly, in every sense of the word.


## QTXE, QTRE and QTR Fan Features

- Very quiet operation <0.3 to 1.5 sones
- 50 CFM to 150 CFM
- QTXE features 6" ducting for superior performance
- QTRE and QTR models feature 4" ducting
- QTRE and QTXE models are ENERGY STAR® qualified
- HVI Certified
- QTXE, QTRE and Housing Project Packs include hanger bar system for fast, flexible installation for all types of construction
- Motor engineered for continuous operation
- UL Listed for use over bathtub or shower when connected to a GFCI protected branch circuit
- Fits 2" x 8" ceiling construction

### QTXE Models

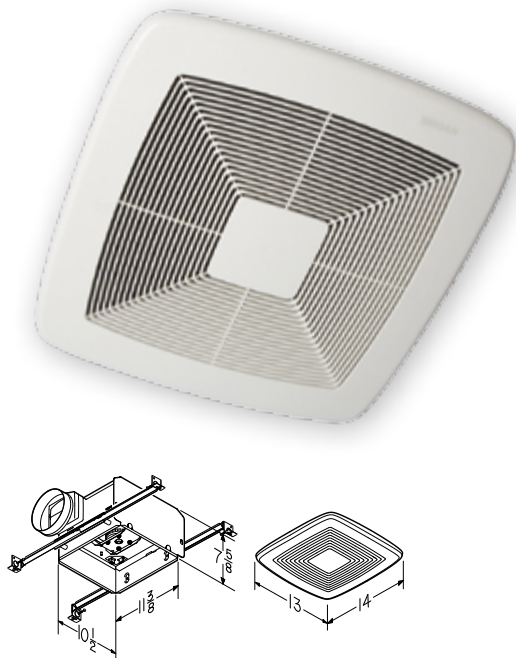


Fan Model	CFM	Sones	ENERGY STAR®	Bath Sq. Ft.	Ducting
QTXE050	50	<0.3	Yes	45	6"▲
QTXE080	80	0.3	Yes	75	6"▲
QTXE110	110	0.7	Yes	100	6"▲
QTXE150	150	1.4	Yes	140	6"▲

 ENERGY STAR® fans use 65% less energy, on average, than standard models and may qualify for local utility rebates.  
▲ See page 54 for 6" ducting (DT6W) product specifications.  
+ Only available in project packs.



### QTRE & QTR Models

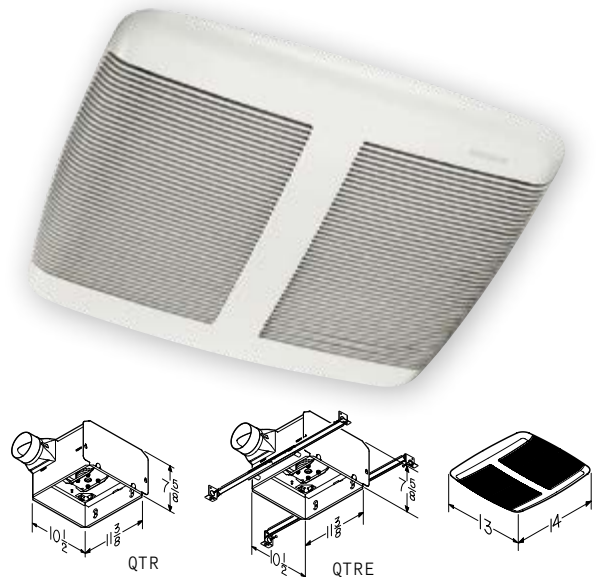


### QTRE080C2S QT Select Air™ ventilation fan

Many rooms in the home can benefit from extra ventilation— not just the bathroom. Kitchens, laundry rooms, media rooms and closets are just a few examples. Now you can provide these rooms with extremely quiet ventilation at a more continuous lower level or in a boost mode whenever needed.

- 80 CFM at 0.8 Sones in boost mode
- 40 CFM at <0.3 Sones in normal mode
- Energy Star® qualified
- 4" ducting
- HVI certified

Fan Model	CFM	Sones	ENERGY STAR®	Bath Sq. Ft.	Ducting
QTRE080C2S	80/40	0.8/<0.3	Yes	75	4"
QTRE080	80	0.8	Yes	75	4"
QTRE110	110	1.3	Yes	100	4"
QTR050+	50	0.4	—	45	4"
QTR080	80	1.0	—	75	4"
QTR110	110	1.5	—	100	4"

 ENERGY STAR® fans use 65% less energy, on average, than standard models and may qualify for local utility rebates.  
▲ See page 54 for 6" ducting (DT6W) product specifications.  
+ Only available in project packs.

